A User's Guide to the

Lout

Document Formatting System

Jeffrey H. Kingston

Version 3.13
February, 1999

Copyright © 1991, 1999 Jeffrey H. Kingston, Basser Department of Computer Science, The University of Sydney 2006, Australia. ISBN 0 86758 9515.

Preface

This User's Guide brings together in one document everything needed for the day-to-day use of Version 3 of the Lout document formatting system.

There are three other documents describing Lout: the Expert's Guide [5], which you need if you want to add new features to Lout; a journal paper on the design and implementation of Lout [3]; and a set of overhead transparencies [4] that cover much the same ground as this Guide. These documents are all distributed with the software.

Lout is distributed free of charge under the GNU Public License. The primary source is directory

ftp://ftp.cs.su.oz.au/jeff/lout

in which may be found a gzipped tar file containing the main distribution (currently lout-3.13.tar.gz), and various other things including a PostScript version of this guide. The distribution contains source code, libraries, documentation, license, and installation instructions.

A mailing list has been set up for discussion of all topics related to Lout. To subscribe, send email to lout-request@ptc.spbu.ru containing the word subscribe in the Subject line. To post an item, send email to lout@ptc.spbu.ru; it will be forwarded to all subscribers via email. To unsubscribe, send email to lout-request@ptc.spbu.ru containing the word unsubscribe in the Subject line.

Lout began in 1984 as a research project into the design of a high-level language for document formatting. At that time my name for the subject was 'document layout,' and this terminology survives in the name 'Lout'. The initial design was strongly influenced by Brian W. Kernighan and Lorinda L. Cherry's eqn equation formatter [2], and also by Brian K. Reid's Scribe system [9]. That research phase ended in October 1991 with the first public release of Lout.

Since then the system has been steadily improved and extended. Optimal paragraph breaking and automatic hyphenation were copied from Donald E. Knuth's TEX system [6], and the optimal paragraph breaking algorithm was applied to the problem of producing optimal page breaks. The first implementations of horizontal galleys and optimal page breaking were by my student Gabor Inokai. Vincent Tan contributed the PDF back end. The strongest influence during this period has come from Lout's users; indeed the number of people who have offered comments and suggestions is so great that it is quite out of my power to acknowledge them individually. I hope that seeing their ideas adopted will be thanks enough.

Jeffrey H. Kingston
Basser Department of Computer Science
The University of Sydney 2006, Australia
jeff@cs.usyd.edu.au

Contents

Chapter 1. The Basics 1
1.1. Getting started 1
1.2. Objects, symbols, options, and lengths 3
1.3. Spaces and braces 5
1.4. Characters 7
1.5. The empty object 11
1.6. Fonts and font sizes 11
1.7. Headings 14
1.8. Starting a new line, paragraph, or page 15
1.9. Paragraph breaking 16
1.10. Line spacing 19
1.11. Hyphenation 20
1.12. Underlining 21
1.13. The current date and time 21
1.14. Languages other than English 22
1.15. Superscripts and subscripts 24
1.16. Verbatim text 24
1.17. Drop capitals 25
1.18. Alternative conventions for white space 25

Chapter 2. Adding Structure to Documents 27
2.1. Displays 27
2.2. Lists 28
2.3. Footnotes and endnotes 32
2.4. Margin notes and arbitrary placement 34
2.5. Theorems, lemmas, corollaries, definitions, propositions, examples, and claims 36
2.6. Figures and tables 37
2.7. Large-scale structure: chapters, sections, etc. 41
2.8. Cross references 44
2.9. Tables of contents 45
2.10. Indexes 46
2.11. Multiple columns 51
2.12. Defining new symbols 52

Chapter 3. Types of Documents 55
3.1. Ordinary documents 55
3.2. Technical reports 59
3.3. Books 65
3.4. Overhead transparencies 71
3.5. Stand-alone illustrations 75
3.6. Plain text documents 76
3.7. PDF (Adobe Portable Document Format) documents 78
3.8. Organizing large documents 78

Chapter 4. Changing the Overall Format 80
4.1. Setup files 80
4.2. Page size and page orientation 83
4.3. Page margins, page boxes, and page backgrounds 85
4.4. Page numbers and running headers 88

Chapter 5. References 93
5.1. Setting up a bibliographic database 93
5.2. Citation 94
5.3. Labelled (as opposed to numbered) references 96
5.4. Constructing database entries 97
5.5. Changing the appearance of citations and the reference list 101
5.6. Creating your own entry types and formats 104

Chapter 6. Tables 107
6.1. Getting started 107
6.2. Changing the appearance of cells 109
6.3. Changing the appearance of rows 110
6.4. Margins 111
6.5. Cell width and height 112
6.6. Indenting and struts 113
6.7. Rules 114
6.8. Spanning columns and rows 116
6.9. Multi-page tables 119
6.10. Aligned columns 120
6.11. Vertical alignment of tables 121
6.12. Plain text tables 122
6.13. Changing the overall format 123
6.14. Summary of options 124

Chapter 7. Equations 127
7.1. Introduction 127
7.2. Symbols 128
7.3. Vertical positioning 132
7.4. Spacing 134
7.5. Displaying equations 135
7.6. Defining new equation formatting symbols 136
7.7. Summary 137
7.8. An alternative version that uses TEX's fonts 144

Chapter 8. Basic Graphics 145
8.1. Colour 145
8.2. Boxes and rules 146
8.3. Rotation 148
8.4. Scaling 149
8.5. Including an illustration 150

Chapter 9. Diagrams 151
9.1. Introduction 151
9.2. Nodes 153
9.3. Links 158
9.4. Tags 161
9.5. Labels 163
9.6. Positioning 167
9.7. Trees 170
9.8. Errors 174
9.9. Expert usage: defining new shapes 175
9.10. Expert usage: numbers, lengths, angles, and points 179
9.11. Summary 182

Chapter 10. Graphs 194
10.1. Introduction 194
10.2. Changing the overall appearance of the graph 195
10.3. Captions 198
10.4. Ticks and labels 200
10.5. Changing the appearance of the data 202
10.6. Placing arbitrary objects on the graph 206
10.7. Mathematical functions, loops, and tests 207
10.8. Adding a key to the graph 210

10.9. Errors 211
10.10. Summary 211

Chapter 11. C and C++ Programs 216
11.1. Stand-alone mode 216
11.2. Embedded mode 216
11.3. Changing the default values 219
11.4. Lout inside C comments 221
11.5. Tab characters 221
11.6. Eiffel program printing 222

Chapter 12. Pascal and Modula-2 Programs 224

Appendix A. Lout Quick Reference Guide 227

Appendix B. Bypass Symbols 229

References 231

Index 232

Chapter 1. The Basics

The Lout document formatting system has been designed with the needs of the ordinary user very much in mind. Although the features of Lout are virtually endless, and include mathematical equations, diagrams made from lines and shapes, bibliographic databases, and so on, the system is very simple to use.

1.1. Getting started

Suppose you want to produce the following little document:

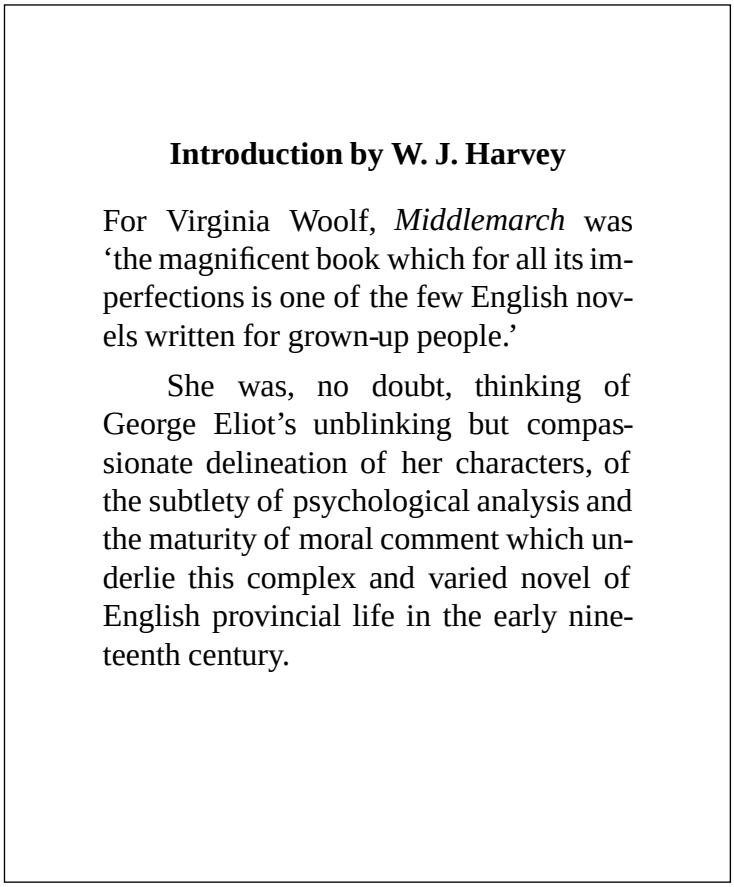

Introduction by W. J. Harvey

For Virginia Woolf, *Middlemarch* was 'the magnificent book which for all its imperfections is one of the few English novels written for grown-up people.'

She was, no doubt, thinking of George Eliot's unblinking but compassionate delineation of her characters, of the subtlety of psychological analysis and the maturity of moral comment which underlie this complex and varied novel of English provincial life in the early nineteenth century.

Unlike word processing and desktop publishing systems, with Lout you cannot see and edit your document on the screen in this finished form. Instead, you edit an ordinary text file, in which your text is augmented with symbols that mark out the headings, paragraphs, and so on. Although it would be nice to be able to see and edit the finished form, working with a text file and symbols does have some compensating advantages.

The first step in producing your introduction to *Middlemarch* is to use the text editor of your choice to construct this text file:

```
@SysInclude { doc }
@Doc @Text @Begin
@Display @Heading { Introduction by W. J. Harvey }
For Virginia Woolf, @I Middlemarch was ‘the magnificent book which for all its
imperfections is one of the few English novels written for grown-up people.’
@PP
She was, no doubt, thinking of George Eliot’s unblinking but compassionate
delineation of her characters, of the subtlety of psychological analysis and
the maturity of moral comment which underlie this complex and varied novel
of English provincial life in the early nineteenth century.
@End @Text
```

Comparing this with the finished form, it's easy to guess that @I is a symbol that causes the following thing to be printed in italics, and that @PP starts a new paragraph. The other symbols are not much harder.

@SysInclude { doc } instructs Lout to read a *setup file* called doc, in which the symbols are defined. Setup files are the subject of Chapter 4, but you can go a long way without worrying about them. @Doc @Text @Begin and @End @Text have no visible effect, but they must bracket the document as a whole. Again, you don't have to know what they are for.

That explains everything except the part that produces the heading. It's an interesting glimpse of the way that Lout's symbols cooperate with each other:

```
@Display @Heading { Introduction by W. J. Harvey }
```

The @Display symbol does the centring and leaves space above and below, while @Heading switches to a bold font. The braces group the words of the heading together so that these symbols apply to all of it; without them they would apply to just the first word. All this is explained in detail in Sections 1.2 and 1.3.

Once the file is ready, the next step is to get it processed by the Basser Lout interpreter. If the file's name is intro, the command for this on the Unix[1] operating system is

```
lout intro > intro.ps
```

The output is the PostScript[2] file intro.ps, which is suitable for printing on many laser printers and other devices. There are programs that show you the result on your screen as well, although you won't be able to edit it there. You can also get plain text output (Section 3.6) and PDF output.

There are a few points that often confuse people as they begin, so we'll treat them briefly now with pointers to later sections where they are done properly.

Some characters are symbols that produce special effects – for example, { and } produce grouping – and to turn off these effects the characters must be enclosed in double quotes: "{" produces {. The complete set of these special characters is

```
/  |  &  {  }  #  @  ^  ~  \  "
```

[1] Unix is a trademark.

[2] PostScript is a trademark of Adobe Systems, Inc.

Section 1.4 treats unusual characters in full detail.

Symbols like @Doc and @Text must be separated from each other by one or more spaces, otherwise Lout will think they are part of one symbol. See Section 1.3 for the details.

People familiar with other systems might expect that leaving a blank line would cause Lout to start a new paragraph; but this is not so, you must use a paragraph symbol. Lout will ordinarily take notice of how many spaces you type between words (Section 1.3), but it will mimic the spacing rules of two other systems, troff and TEX, if you prefer (Section 1.18).

When Lout runs, you might see some error messages beginning with 'unresolved cross reference' – not on file intro above, but on more complicated ones (anything with a footnote, for example). These just mean that you have to run the lout command again to finish off the complicated things (Section 2.8), and they will gradually go away. Of course, if you see error messages about missing braces, unknown symbols, and so on, you need to revise your file. Lout will tell you the line number of the problem, and how far along the line it is.

WARNING: Lout allows documents to cause arbitrary system commands to be executed. These typically do useful things such as format computer programs and uncompress graphics files, but it is possible for a malicious person to send you a document which includes a command to delete all your files, send abusive mail to the President of the United States in your name, etc. You can protect yourself against this possibility by using the 'safe execution' flag:

```
lout -S suspect.document > out.ps
```

Then no system commands will be executed; instead, Lout will print them so that you can confirm for yourself that they are safe before running again without the flag. These system commands are Lout's only potentially unsafe features, but you also need to worry about whether the resulting PostScript file contains malicious code, since the document may direct Lout to include arbitrary PostScript code in the output. The safe execution of PostScript programs is a matter for PostScript interpreters, not for Lout. For example, the popular Ghostview program has a -safer command line option, which is rumoured to disable unsafe PostScript features.

1.2. Objects, symbols, options, and lengths

Lout is not concerned with the exact shapes of individual characters, only with the rectangular areas they occupy:

Biology

When letters join together into a word, the result is a larger rectangle enclosing them all:

Biology

When words join into lines we get even larger rectangles:

Biology is the study of living things.

and so on up through paragraphs and columns to the largest rectangles, which are pages. We call any such rectangle, whether made up of one character, one word, one line, one paragraph, one page, or anything else, an *object*.

We also often say, for example, 'the object @I { Hello world },' referring to a piece of Lout's input as an object. This makes sense because we are anticipating the result produced, in this case the object *Hello world*. It's true that if a line break happens to fall between *Hello* and *world*, the result of @I { Hello world } is not a single rectangle. We answer this by thinking of objects as existing before paragraph breaking rearranges them.

Not everything is an object, however. @I alone is not an object, merely a symbol with the potential of producing an object when given an object to work on. To understand this, ask yourself what rectangle @I alone could possibly represent: there is no such rectangle.

It helps to imagine the assembly of objects taking place before your eyes. Look at Hello and imagine the objects H, e, l, l, o being assembled into the larger object Hello; look at Hello world and imagine Hello and world being assembled into Hello world. When looking at

```
@I { Hello world }
```

you need to imagine the @I symbol consuming the following object, Hello world, and replacing it with the object *Hello world*. Here is another example:

```
@CurveBox { Hello world }
```

The @CurveBox symbol (Section 8.2) consumes Hello world and replaces it with the object

Hello world

This brings us to a basic principle of Lout: *Where you can put one object, you can put any object*. A few examples will show the vast range of possibilities opened up by this:

```
@CurveBox { @I Hello world }
```

produces

Hello world

It doesn't bother @CurveBox if one of the words inside it is in italics. Next:

```
@I @CurveBox { Hello world }
```

produces

Hello world

The object following @I cannot be just @CurveBox, since that is not an object by itself (it needs to be applied to some object first). So the object following @I is @CurveBox { Hello world }, and it is this that is consumed by @I and modified. The @I symbol is happy to hunt through the object looking for words to italicize. We could go on indefinitely in this way, producing

Hello world

for example by @CurveBox { @CurveBox Hello @CurveBox world }.

Symbols like @CurveBox often have *options*, which are subsidiary symbols that modify the result. For example, @CurveBox has margin and paint options:

```
@CurveBox
   margin { 0.5c }
   paint { lightgrey }
{ Hello world }
```

Options come immediately after the main symbol, before any following object. Each consists of the option name followed by the value we want the option to have, always enclosed in braces. Setting out options on separate lines as we have done above makes them easy to see but is not compulsory (end of line and space are the same to Lout). The result, naturally enough, is a curved box with a 0.5 centimetre margin around its contents, painted light grey:

Options are optional: if you leave out an option, Lout supplies a sensible *default* value for it. Options may be given in any order. They are a very useful way of adding flexibility to symbols without cluttering things up when they aren't needed. They also help with learning: you can learn the basic symbol first and worry about the options later.

Whenever a length is required, as in the margin option above, it may be given using any one of the following seven units of measurement:

c	Centimetres
i	Inches (1i = 2.54c)
p	Points (72p = 1i)
m	Ems (12m = 1i)
f	1f is the current font size
s	1s is the current width of a space character
v	1v is the current inter-line spacing

The first four all define absolute distances and are strictly interchangeable. It is traditional to measure font sizes in points; typical sizes are 12p and 10p, but fractional sizes are allowed.

If you use the f unit, the length will depend on the current font size. This can be very useful. For example, the default value of the margin option of @CurveBox is 0.3f (0.3 times the current font size). If you use a large font, for example in an overhead transparency, you get a correspondingly large margin without having to ask for it.

The s and v units are less useful. The v unit is used within paragraph symbols (Section 1.8) to ensure that the space between paragraphs widens with the inter-line spacing.

1.3. Spaces and braces

Every symbol in Lout either consists entirely of letters (@ is considered to be a letter) or entirely of punctuation characters. Here are some examples of each type:

From letters	*From punctuation*
@PP	{
margin	}

Now if two symbols made from letters are run together like this:

```
@CurveBox@I  Hello                    (wrong!)
```

Lout will take this to mean one word or symbol called @CurveBox@I, which is wrong. In the same way, a letter-type symbol cannot be run together with a word. However, punctuation-type symbols can be run together with anything. For example, in

```
@CurveBox{ Hello @I { world }}.
```

Lout understands that @CurveBox and { are separate, and it also sorts out }}. into two right brace symbols and a full stop. It might seem strange to treat punctuation and letters so differently, but computer programming languages have done it like this for many years, and it works well. This is the first use for spaces: to separate letter-type symbols from each other and from words.

To see the second use for spaces, consider two words side by side:

```
Hello world
```

We want this to produce Hello world, so a space between two words in the input must mean a space between them in the result. Apply the golden rule (where you can put one object, you can put any object) and you get this: *a space between two objects in the input produces a space between them in the result*. For example,

```
@CurveBox Hello @CurveBox world
```

produces

Hello world

The space between the two objects @CurveBox Hello and @CurveBox world appears between them in the result; the other two spaces do not separate objects so do not appear in the result.

Two objects may be separated by a number of spaces other than one. If they are separated by no spaces, they will appear immediately adjacent in the result; if separated by two spaces, they will appear two spaces apart; and so on. In English it is correct to leave two spaces between the end of one sentence and the beginning of the next, for example. See Section 1.18 for two alternative ways to interpret white space in Lout.

Occasionally the two uses for spaces conflict. For example, to produce

Hello world

we need to have no spaces between the two objects, but then Hello and the following @CurveBox would be run together, which will not work. The solution is to use braces:

```
{ @CurveBox Hello }{ @CurveBox world }
```

None of the six spaces in this example lie between two objects.

However, the main use of braces is to inform Lout that the object within them is to be kept together, so that any nearby symbols are to apply to all of it. For example, leaving the braces out of `@I { Hello world }` would mean that `@I` applies only to `Hello`.

When an object-consuming symbol like `@I` is followed by an object enclosed in braces, that is the object consumed. For example,

```
This is @I { absolutely necessary }, since otherwise ...
```

produces

This is *absolutely necessary*, since otherwise …

with the object `absolutely necessary` italicized, but not the following comma. If there are no braces, the object consumed is everything up to the next object-separating space:

```
This is @I necessary, since otherwise ...
```

produces

This is *necessary*, since otherwise …

with an undesirable italic comma. In practice, this means you can avoid braces only when italicizing a single word with no punctuation attached.

One common pitfall is to use unnecessary braces, like this:

```
@I { @CurveBox { Hello world } }          (bad!)
```

Another is to think that all spaces produce space in the result, and so write

```
@I{@CurveBox{Hello world}}          (worse!)
```

Use braces only when necessary, and add extra spaces where they do not separate objects, and your documents will be far easier to read while you are working on them. Don't be fooled by the argument that says it doesn't matter because it doesn't affect the final printed result.

1.4. Characters

The usual way to get characters into a document is simply to type them as we have been doing all along. However, for some characters this is not possible, either because they have some special meaning, as { and } do, or because the keyboard has no button for them. This section explains how to get every possible character: every printable character in the ISO-LATIN-1 character set, every character in the Adobe Systems Symbol font, plus the characters ‚, „, …, Œ, œ, “, ”, fi, fl, –, —, •, †, ‡, ƒ, and ⁄. If it exists at all, you will find it here. ISO-LATIN-2 and Russian characters are available separately. In principle, there is no limit to the characters available, but to go beyond those given in this section requires expertise in defining encoding vectors and fonts [5].

First up we have the characters that you get simply by typing them. The characters

themselves are shown at the left, and what you type to get them at the right:

!	!	$	$	%	%	’	’	(	(	)	)
*	*	+	+	,	,	-	-	0	0	1	1
2	2	3	3	4	4	5	5	6	6	7	7
8	8	9	9	:	:	;	;	<	<	=	=
>	>	?	?	A	A	B	B	C	C	D	D
E	E	F	F	G	G	H	H	I	I	J	J
K	K	L	L	M	M	N	N	O	O	P	P
Q	Q	R	R	S	S	T	T	U	U	V	V
W	W	X	X	Y	Y	Z	Z	[	[	]	]
_	_	‘	‘	a	a	b	b	c	c	d	d
e	e	f	f	g	g	h	h	i	i	j	j
k	k	l	l	m	m	n	n	o	o	p	p
q	q	r	r	s	s	t	t	u	u	v	v
w	w	x	x	y	y	z	z				

Next come characters that have buttons but have a special meaning if they are typed directly, and consequently have to be enclosed in double quotes to turn off this meaning:

"	"\""	#	"#"	&	"&"	/	"/"	
@	"@"	\	"\\"	^	"^"	{	"{"	
|	"|"	}	"}"	~	"~"		" "	(space character)

If you think you want ", you probably really want “ and ”, for which see below. You can place whole sequences of characters, special or not, inside one pair of double quotes:

jeff/includes/su_crest.eps	"jeff/includes/su_crest.eps"
"@PP"	"\"@PP\""

Next we have some miscellaneous characters which have been deemed sufficiently important to deserve their own symbols:

“	“	”	,,	–	--
”	”	…	...	—	---
•	@Bullet	*	@Star	¶	@ParSym
§	@SectSym	†	@Dagger	‡	@DaggerDbl
·	@CDot	£	@Sterling	¥	@Yen
f	@Florin	°	@Degree	′	@Minute
″	@Second	◊	@Lozenge	×	@Multiply
÷	@Divide	©	@CopyRight		@Register
™	@TradeMark				

Next we have the complete ISO-LATIN-1 character set, whose members you get with the @Char symbol followed by the name of the character you want:

	@Char space	!	@Char exclam	"	@Char quotedbl	#	@Char numbersign
$	@Char dollar	%	@Char percent	&	@Char ampersand	’	@Char quoteright
(	@Char parenleft	)	@Char parenright	*	@Char asterisk	+	@Char plus
,	@Char comma	-	@Char hyphen	.	@Char period	/	@Char slash
0	@Char zero	1	@Char one	2	@Char two	3	@Char three
4	@Char four	5	@Char five	6	@Char six	7	@Char seven
8	@Char eight	9	@Char nine	:	@Char colon	;	@Char semicolon
<	@Char less	=	@Char equal	>	@Char greater	?	@Char question
@	@Char at	A	@Char A	B	@Char B	C	@Char C
D	@Char D	E	@Char E	F	@Char F	G	@Char G
H	@Char H	I	@Char I	J	@Char J	K	@Char K
L	@Char L	M	@Char M	N	@Char N	O	@Char O
P	@Char P	Q	@Char Q	R	@Char R	S	@Char S
T	@Char T	U	@Char U	V	@Char V	W	@Char W
X	@Char X	Y	@Char Y	Z	@Char Z	[	@Char bracketleft
\	@Char backslash	]	@Char bracketright	^	@Char asciicircum	_	@Char underscore
‘	@Char quoteleft	a	@Char a	b	@Char b	c	@Char c
d	@Char d	e	@Char e	f	@Char f	g	@Char g
h	@Char h	i	@Char i	j	@Char j	k	@Char k
l	@Char l	m	@Char m	n	@Char n	o	@Char o
p	@Char p	q	@Char q	r	@Char r	s	@Char s
t	@Char t	u	@Char u	v	@Char v	w	@Char w
x	@Char x	y	@Char y	z	@Char z	{	@Char braceleft
|	@Char bar	}	@Char braceright	~	@Char asciitilde	ı	@Char dotlessi
`	@Char grave	´	@Char acute	ˆ	@Char circumflex	˜	@Char tilde
¯	@Char macron	˘	@Char breve	˙	@Char dotaccent	¨	@Char dieresis
°	@Char ring	¸	@Char cedilla	˝	@Char hungarumlaut	˛	@Char ogonek
ˇ	@Char caron		@Char space	¡	@Char exclamdown	¢	@Char cent
£	@Char sterling	¤	@Char currency	¥	@Char yen	¦	@Char brokenbar
§	@Char section	¨	@Char dieresis	©	@Char copyright	ª	@Char ordfeminine
«	@Char guillemotleft	¬	@Char logicalnot	-	@Char hyphen	®	@Char registered
¯	@Char macron	°	@Char degree	±	@Char plusminus	²	@Char twosuperior
³	@Char threesuperior	´	@Char acute	µ	@Char mu	¶	@Char paragraph
·	@Char periodcentered	¸	@Char cedilla	¹	@Char onesuperior	º	@Char ordmasculine
»	@Char guillemotright	¼	@Char onequarter	½	@Char onehalf	¾	@Char threequarters
¿	@Char questiondown	À	@Char Agrave	Á	@Char Aacute	Â	@Char Acircumflex
Ã	@Char Atilde	Ä	@Char Adieresis	Å	@Char Aring	Æ	@Char AE
Ç	@Char Ccedilla	È	@Char Egrave	É	@Char Eacute	Ê	@Char Ecircumflex
Ë	@Char Edieresis	Ì	@Char Igrave	Í	@Char Iacute	Î	@Char Icircumflex
Ï	@Char Idieresis	Ð	@Char Eth	Ñ	@Char Ntilde	Ò	@Char Ograve
Ó	@Char Oacute	Ô	@Char Ocircumflex	Õ	@Char Otilde	Ö	@Char Odieresis
×	@Char multiply	Ø	@Char Oslash	Ù	@Char Ugrave	Ú	@Char Uacute
Û	@Char Ucircumflex	Ü	@Char Udieresis	Ý	@Char Yacute	Þ	@Char Thorn
ß	@Char germandbls	à	@Char agrave	á	@Char aacute	â	@Char acircumflex
ã	@Char atilde	ä	@Char adieresis	å	@Char aring	æ	@Char ae
ç	@Char ccedilla	è	@Char egrave	é	@Char eacute	ê	@Char ecircumflex
ë	@Char edieresis	ì	@Char igrave	í	@Char iacute	î	@Char icircumflex
ï	@Char idieresis	ð	@Char eth	ñ	@Char ntilde	ò	@Char ograve
ó	@Char oacute	ô	@Char ocircumflex	õ	@Char otilde	ö	@Char odieresis
÷	@Char divide	ø	@Char oslash	ù	@Char ugrave	ú	@Char uacute
û	@Char ucircumflex	ü	@Char udieresis	ý	@Char yacute	þ	@Char thorn
ÿ	@Char ydieresis						

Of course, many of these characters can also be typed directly, or with the aid of double quotes, as we have seen. If your keyboard has accented characters on it, you can type them directly too; if not, you need to use the @Char symbol, in which case you will probably need braces as well:

```
gar{@Char ccedilla}on
```

to distinguish the @Char symbol and the character name from adjacent letters.

Next we have the Adobe Systems Symbol font, a treasure trove of exotic characters obtained with the @Sym symbol:

	@Sym space	!	@Sym exclam	∀	@Sym universal	#	@Sym numbersign
∃	@Sym existential	%	@Sym percent	&	@Sym ampersand	϶	@Sym suchthat
(	@Sym parenleft	)	@Sym parenright	*	@Sym asteriskmath	+	@Sym plus
,	@Sym comma	−	@Sym minus	.	@Sym period	/	@Sym slash
0	@Sym zero	1	@Sym one	2	@Sym two	3	@Sym three
4	@Sym four	5	@Sym five	6	@Sym six	7	@Sym seven
8	@Sym eight	9	@Sym nine	:	@Sym colon	;	@Sym semicolon
<	@Sym less	=	@Sym equal	>	@Sym greater	?	@Sym question
≅	@Sym congruent	A	@Sym Alpha	B	@Sym Beta	X	@Sym Chi
Δ	@Sym Delta	E	@Sym Epsilon	Φ	@Sym Phi	Γ	@Sym Gamma
H	@Sym Eta	I	@Sym Iota	ϑ	@Sym theta1	K	@Sym Kappa
Λ	@Sym Lambda	M	@Sym Mu	N	@Sym Nu	O	@Sym Omicron
Π	@Sym Pi	Θ	@Sym Theta	P	@Sym Rho	Σ	@Sym Sigma
T	@Sym Tau	Y	@Sym Upsilon	ς	@Sym sigma1	Ω	@Sym Omega
Ξ	@Sym Xi	Ψ	@Sym Psi	Z	@Sym Zeta	[	@Sym bracketleft
∴	@Sym therefore	]	@Sym bracketright	⊥	@Sym perpendicular	_	@Sym underscore
‾	@Sym radicalex	α	@Sym alpha	β	@Sym beta	χ	@Sym chi
δ	@Sym delta	ε	@Sym epsilon	ϕ	@Sym phi	γ	@Sym gamma
η	@Sym eta	ι	@Sym iota	φ	@Sym phi1	κ	@Sym kappa
λ	@Sym lambda	μ	@Sym mu	ν	@Sym nu	ο	@Sym omicron
π	@Sym pi	θ	@Sym theta	ρ	@Sym rho	σ	@Sym sigma
τ	@Sym tau	υ	@Sym upsilon	ϖ	@Sym omega1	ω	@Sym omega
ξ	@Sym xi	ψ	@Sym psi	ζ	@Sym zeta	{	@Sym braceleft
|	@Sym bar	}	@Sym braceright	~	@Sym similar	ϒ	@Sym Upsilon1
′	@Sym minute	≤	@Sym lessequal	⁄	@Sym fraction	∞	@Sym infinity
ƒ	@Sym florin	♣	@Sym club	♦	@Sym diamond	♥	@Sym heart
♠	@Sym spade	↔	@Sym arrowboth	←	@Sym arrowleft	↑	@Sym arrowup
→	@Sym arrowright	↓	@Sym arrowdown	°	@Sym degree	±	@Sym plusminus
″	@Sym second	≥	@Sym greaterequal	×	@Sym multiply	∝	@Sym proportional
∂	@Sym partialdiff	•	@Sym bullet	÷	@Sym divide	≠	@Sym notequal
≡	@Sym equivalence	≈	@Sym approxequal	…	@Sym ellipsis	⏐	@Sym arrowvertex
—	@Sym arrowhorizex	↵	@Sym carriagereturn	ℵ	@Sym aleph	ℑ	@Sym Ifraktur
ℜ	@Sym Rfraktur	℘	@Sym weierstrass	⊗	@Sym circlemultiply	⊕	@Sym circleplus
∅	@Sym emptyset	∩	@Sym intersection	∪	@Sym union	⊃	@Sym propersuperset
⊇	@Sym reflexsuperset	⊄	@Sym notsubset	⊂	@Sym propersubset	⊆	@Sym reflexsubset
∈	@Sym element	∉	@Sym notelement	∠	@Sym angle	∇	@Sym gradient
	@Sym registerserif	©	@Sym copyrightserif	™	@Sym trademarkserif	∏	@Sym product
√	@Sym radical	·	@Sym dotmath	¬	@Sym logicalnot	∧	@Sym logicaland
∨	@Sym logicalor	⇔	@Sym arrowdblboth	⇐	@Sym arrowdblleft	⇑	@Sym arrowdblup
⇒	@Sym arrowdblright	⇓	@Sym arrowdbldown	◊	@Sym lozenge	〈	@Sym angleleft
	@Sym registersans	©	@Sym copyrightsans	™	@Sym trademarksans	∑	@Sym summation
⎛	@Sym parenlefttp	⎜	@Sym parenleftex	⎝	@Sym parenleftbt	⎡	@Sym bracketlefttp
⎢	@Sym bracketleftex	⎣	@Sym bracketleftbt	⎧	@Sym bracelefttp	⎨	@Sym braceleftmid
	@Sym braceleftbt	⎪	@Sym braceex	〉	@Sym angleright	∫	@Sym integral
⌠	@Sym integraltp	⎮	@Sym integralex	⌡	@Sym integralbt	⎞	@Sym parenrighttp
⎟	@Sym parenrightex	⎠	@Sym parenrightbt	⎤	@Sym bracketrighttp	⎥	@Sym bracketrightex
⎦	@Sym bracketrightbt	⎫	@Sym bracerighttp	⎬	@Sym bracerightmid	⎭	@Sym bracerightbt

There is only one Symbol font; it does not come in bold or italic faces like the other fonts.

Typing @B @Sym alpha is therefore useless, and anyway there is no bold α character in any font distributed with Lout (except see Section 7.8).

Finally we have a few more characters that you get with the @Char symbol, although they aren't ISO-LATIN-1 characters.

‚	@Char quotesinglbase	„	@Char quotedblbase	…	@Char ellipsis	Œ	@Char OE
œ	@Char oe	“	@Char quotedblleft	”	@Char quotedblright	fi	@Char fi
fl	@Char fl	–	@Char endash	—	@Char emdash	•	@Char bullet
†	@Char dagger	‡	@Char daggerdbl	*f*	@Char florin	⁄	@Char fraction

Most of these characters are also in the list of 'characters important enough to deserve their own symbols' given above.

1.5. The empty object

It is possible to produce examples in which an object is clearly missing:

```
{ @I }
```

The @I symbol is supposed to italicize the following object, but in this example there isn't one. A more plausible example is

```
@PP
@PP
```

There are supposed to be paragraph objects between paragraph symbols, but here there aren't.

Wherever an object is clearly missing, Lout inserts an *empty object*, which is a rectangle of size zero by zero that prints as nothing. Here are two other ways to get an empty object:

```
{}    ""
```

Braces always enclose an object, so Lout is obliged to insert an empty object between them; the two double quotes make a word with no characters in it, which is taken to be an empty object.

1.6. Fonts and font sizes

A *font* is a collection of characters that may be printed. For example, here is the Times Roman font:

```
 !"#$%&'()*+,-./0123456789:;<=>?@[\]^_‘
ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
{|}~ı`´ˆ˜¯˘¨˚¸˝˛ˇ ¡¢£¤¥¦§¨©ª«¬-®¯°±²³´µ¶·¸¹º»¼½¾¿
ÀÁÂÃÄÅÆÇÈÉÊËÌÍÎÏÐÑÒÓÔÕÖ×ØÙÚÛÜÝÞ
ßàáâãäåæçèéêëìíîïðñòóôõö÷øùúûüýþÿ
```

and here is the Times Italic font:

```
 !"#$%&'()*+,-./0123456789:;<=>?@[\]^_‘
ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
{|}~ı`´ˆ˜¯˘˙¨˚¸˝˛ˇ ¡¢£¤¥¦§¨©ª«¬-®¯°±²³´µ¶·¸¹º»¼½¾¿
ÀÁÂÃÄÅÆÇÈÉÊËÌÍÎÏÐÑÒÓÔÕÖ×ØÙÚÛÜÝÞ
ßàáâãäåæçèéêëìíîïðñòóôõö÷øùúûüýþÿ
```

As their names imply, these two fonts belong to the *Times family*, a collection of fonts designed to go well together. Every font has a *family name*, such as Times, Helvetica, or Courier, and a *face name*, such as Roman or Italic. To find out how to get the unusual characters, see Section 1.4.

Documents look best when they use just one font family, so the most common need is to change to a different face within the current family. We have already seen @I, which changes to the Italic face of the current family; there are six such symbols:

@B { Hello World }	**Hello World**
@I { Hello World }	*Hello World*
@BI { Hello World }	***Hello World***
@II { Hello World }	*Hello World*
@S { Hello World }	Hello World
@R { Hello World }	Hello World

The symbols' names stand for Bold, Italic, Bold-Italic, Italic-Italic (see below), Small capitals, and Roman. It is conventional to use Bold for headings; Italic for emphasis, terms being defined, and subsidiary headings; and Roman for the rest. Small capitals are not really a different font; they are made on demand from the current font. So you can write, for example,

```
@I @S { Hello World }
```

and get *Hello World*.

The @R symbol is almost unnecessary, since the document as a whole is set in a Roman face; but it is occasionally useful:

```
@I { An Italic sentence with one @R Roman word }
```

produces

An Italic sentence with one Roman *word*

This illustrates the general principle that the effect of a font symbol on the following object is subject to font symbols within that object.

When part of a title is to be set in italic font, neither @I nor @BI is suitable because the part should appear in bold italics in the title itself, but in ordinary italics in running headers and the table of contents. The @II symbol is the one for this situation: it produces bold italics when the current font is bold, and ordinary italics otherwise.

Changing families is a little more complicated. Here is the complete list of font families and their faces available with Basser Lout Version 3:

AvantGarde	Base Slope Bold BoldSlope BoldObl Book BookOblique CondBold CondBook CondDemi CondMedium Demi DemiOblique ExtraLight ExtraLightObl Medium MediumObl
Bookman	Base Slope Bold BoldSlope BoldItalic Demi DemiItalic Light LightItalic Medium MediumItalic
Chancery	Base Slope Bold BoldSlope Roman Bold Italic Light Demi LightItalic MediumItalic
Courier	Base Slope Bold BoldSlope BoldOblique Oblique
Helvetica	Base Slope Bold BoldSlope Black BlackOblique BoldOblique Compressed Cond CondBlack CondBlackObl CondBold CondBoldObl CondLight CondLightObl CondOblique ExtraCompressed Light LightOblique Narrow NarrowBold NarrowBoldObl NarrowObl Oblique UltraCompressed
Schoolbook	Base Slope Bold BoldSlope BoldItalic Italic Roman
Palatino	Base Slope Bold BoldSlope BoldItalic BoldItalicOsF BoldOsF Italic ItalicOsF Roman SC
Symbol	Base Slope Bold BoldSlope
Times	Base Slope Bold BoldSlope BoldItalic BoldItalicOsF BoldSC ExtraBold Italic ItalicOsF Roman RomanSC Semibold SemiboldItalic
Dingbats	Base Slope Bold BoldSlope

Lout understands all these fonts, but your printing device may not. Times, Helvetica, Courier, and Symbol at least seem to be ubiquitous, although not in every face. These fonts work only with languages that use the Latin1 character set; consult Section 1.14 for more information about this. It is not difficult for a Lout expert to extend this list [5].

It is a convention in Lout that every font family should at least contain faces called Base, Slope, Bold, and BoldSlope, and these faces are what the @R, @I, @B, and @BI symbols give you. But this convention is something of a fiction for two reasons. First, some font families don't have faces that could reasonably be described as bold or whatever. In particular, the Symbol family contains just one face, and all four conventional face names produce that face. Second, the four conventional face names are not names that typographers actually use, Bold excepted. Slope produces an italic face in some families and an oblique one in others. As the table shows, the true names are available if you want to use them, but it is very convenient to have a Slope face that is guaranteed to exist no matter which family is used.

The @Font symbol changes the font of the following object. For example,

```
{ Helvetica Slope } @Font { Hello World }
```

produces

Hello World

When changing to a different family, a face name must follow the family name; but when changing face within a family, just the face name is sufficient.

To make the characters larger or smaller, you need to change the *font size*, which can also be done with the @Font symbol. Font sizes are traditionally measured in *points*: there are 72 points to one inch, and the most common font sizes are 12 point and 10 point. However, as Section 1.2 explains in detail, any length including fractional lengths is acceptable:

```
24p @Font { Hello World }
```

changes to 24 point size, producing

Hello World

It is also possible to specify a font size relative to the current size: +2p means two points larger, -2p means two points smaller, and 1.5f means 1.5 times the current font size.

For the convenience of people who use fixed width fonts such as Courier, there is an @F symbol which switches to a fixed width font family:

```
@F { Hello world }
```

produces

```
Hello world
```

It is the same as writing { Courier Base -1p } @Font ... with the -1p included to compensate for the relatively large appearance of the Courier font.

The document as a whole will be set in Times Base 12p. To change this you need to change the @InitialFont option, for example to

```
@InitialFont { Helvetica Base 10p }
```

to get Helvetica 10 point. You must give all three parts in @InitialFont: family, face, size. If you are using your own setup file, as explained in Section 4.1, you can find the @InitialFont option there. If not, you can set it at the beginning of your document as explained in Section 3.1.

There are two features that make fonts look better on the page. *Ligatures* are pairs of letters run together; the most common ligatures are 'fi' and 'fl.' *Kerning* is moving adjacent letters closer together, for example in 'VA.' Lout considers ligatures and kerning to be integral parts of each font; you can prevent them from happening only by enclosing one of the letters in a @OneCol symbol, as in @OneCol { V }A.

1.7. Headings

The @Heading symbol makes the following object into a heading. Actually, all it does is change the font, so if you want a centred heading you have to display it as well:

```
@Display @Heading { A Centred Heading }
Following text
```

If you want a left-justified heading, use @LeftDisplay instead of @Display. Alternatively, you can use no display symbol at all, but then you will need paragraph symbols before and after:

```
@DP
@Heading { A Left-Justified Heading }
@PP
Following text
```

The font used is Bold in the current family, although you can change this by changing the @HeadingFont option in the setup file (Section 4.1).

The @Heading symbol may be used with any type of document, but it is really intended only for simple ones. In complex documents, large-scale structure symbols (Section 2.7) are usually more appropriate.

1.8. Starting a new line, paragraph, or page

The usual way to start a new paragraph is with the @PP 'plain paragraph' symbol. It produces a small vertical space and indents the first line of the new paragraph. Some document formatting systems interpret a blank line as a request to start a new paragraph. This is not the case with Lout: a blank line is two line-endings, equivalent to two spaces.

The @LP 'left paragraph' symbol produces the same vertical space as @PP, but omits the indent. The @LLP 'left line paragraph' symbol starts a new paragraph using the usual inter-line spacing and no indent, or in other words it starts a new line. If you are using it to create single lines, you need the lines paragraph breaking style instead (Section 1.9).

The @DP 'display paragraph' symbol produces a somewhat larger vertical space, equal to the amount used before and after displays (Section 2.1), with no indent. To get even larger vertical spaces, use @DP repeatedly.

The @NP 'new page' symbol causes the following paragraph to begin on a new page or column. Of course, Lout starts a new page or column automatically when the old one is full, so @NP is needed only rarely.

To make each section begin on a new page you must set the @SectionGap setup file option (Section 2.7). To make one particular section start on a new page or column, place @NP within the previous section, at the end. Placing @NP between sections will not work.

Occasionally Lout will start a new page or column directly after a heading, which looks very poor. The obvious answer is to place an @NP just before the heading, but when the document is later revised and the heading no longer falls near the page or column ending, this @NP will have to be taken away again. A better answer is to precede the heading with a @CNP 'conditional new page' symbol, which checks whether enough space remains in the page or column for a heading and at least two lines of text. If so, @CNP does nothing; if not, @CNP causes a new page or column to be begun, like @NP. The recommended arrangement is

```
end of previous part.
@DP
@CNP
@Heading { A Heading }
@PP
First paragraph of next part ...
```

The @CNP symbol should be preceded by either @DP or @LP, preferably @DP, and this determines the amount of space when the @NP action does not occur.

The ultimate answer to the conditional new page problem is to recognise that the heading is the beginning of a new section of the document, and to use a large-scale structure symbol like @Section (Section 2.7). Conditional new page is just one of many services provided automatically by these symbols.

Some people do not like to see the first line of a paragraph alone at the bottom of a page, or the last line of a paragraph alone at the top (these blemishes are sometimes called widows and orphans). You can instruct Lout not to allow these; see the next section for details.

You can modify the effect of the paragraph symbols by changing options in the setup file. For general information about setup files and their options, consult Section 4.1; here we just explain how the relevant options work. The options and their default values are

```
@ParaGap { 1.30vx }
@ParaIndent { 2.00f }
@DisplayGap { 1.00v }
```

The values are lengths (Section 1.2), except that for reasons beyond our scope @ParaGap must be a length with an x appended, as shown. The @ParaGap option determines how much vertical space will be inserted by @PP and @LP. The default value, 1.30vx, is 30% more than the normal inter-line spacing; to get no extra spacing, change it to 1.00vx. The @ParaIndent option determines the width of the indent produced by @PP, and its default value is twice the current font size. The @DisplayGap option determines the amount of vertical space inserted by @DP, and many other things as well, such as the vertical space before and after displays and lists.

1.9. Paragraph breaking

Paragraph breaking is the process of inserting line breaks into praragraphs at places appropriate to the column width. Lout works out suitable column widths and performs paragraph breaking automatically, finding an 'optimal' break with the method used by the TEX system. It offers nine styles of paragraph breaking, which we will explore with the aid of this example:

```
It is a truth universally
acknowledged, that a single man
in possession of a good fortune,
must be in want of a wife.
```

Changing the paragraph breaking style is similar to changing the font, colour, or language, and is done using the @Break symbol:

```
ragged @Break ...
```

This example causes every paragraph in the following object to be broken using the ragged style, of which more below.

The first two of the eight styles perform *line adjustment*, which means that they enlarge the spaces between the objects making up each line so as to fill the lines completely:

adjust @Break ...

It is a truth universally acknowledged, that a single man in possession of a good fortune, must be in want of a wife.

outdent @Break ...

It is a truth universally acknowledged, that a single man in possession of a good fortune, must be in want of a wife.

The adjust style is frequently used, so it has been chosen as the default style. Outdenting adds a small space at the start of each line except the first, and is much less common.

The next four styles do not adjust lines, leaving the paragraph *ragged*:

ragged @Break ...

It is a truth universally acknowledged, that a single man in possession of a good fortune, must be in want of a wife.

cragged @Break ...

It is a truth universally acknowledged, that a single man in possession of a good fortune, must be in want of a wife.

rragged @Break ...

It is a truth universally acknowledged, that a single man in possession of a good fortune, must be in want of a wife.

oragged @Break ...

It is a truth universally acknowledged, that a single man in possession of a good fortune, must be in want of a wife.

The paragraph is broken in the same places as adjust breaks it, but the resulting lines are left-justified, centred, or right-justified with respect to each other, rather than adjusted; oragged is like outdent except the resulting lines are not adjusted.

If you have a few words that must be kept together on one line, the recommended way is to separate them by an ~ symbol:

According to Prof.~Jones, the effect of ...

It's best not to bother about this until you actually get a bad line break, since chances are good that the words will fall on one line anyway.

The last three styles differ from the first five in breaking the paragraph at the points where it is broken in the original input:

lines @Break ...

It is a truth universally
acknowledged, that a single man
in possession of a good fortune,
must be in want of a wife.

clines @Break ...

It is a truth universally
acknowledged, that a single man
in possession of a good fortune,
must be in want of a wife.

rlines @Break ...

It is a truth universally
acknowledged, that a single man
in possession of a good fortune,
must be in want of a wife.

The lines are left-justified, centred, or right-justified with respect to each other in the same way as for the ragged styles.

When using the lines style, there are some fine points concerning the proper use of white space. Consider this example:

```
@IndentedDisplay lines @Break @I {
Teach me to hear Mermaides singing,
Or to keep off envies stinging,
    And finde
    What winde
Serves to'advance an honest minde.
}
```

The result is the indented display

Teach me to hear Mermaides singing,
Or to keep off envies stinging,
And finde
What winde
Serves to'advance an honest minde.

This style is the only one for which it is useful to indent individual lines in the input; as the result shows, such indents will be respected, as will blank lines. However, Lout's rule that only white space separating objects affects the result (Section 1.3) still holds, which means that indenting the first line is not effective:

```
@IndentedDisplay lines @Break @I {
    And finde
    What winde
Serves to'advance an honest minde.
}
```

produces

And finde
What winde
Serves to'advance an honest minde.

This may seem awkward at first, but actually it is extremely convenient because you don't have

to worry about whether the first line of the paragraph should appear on a new line as above, or immediately after the opening brace: space at that point does not separate two objects, so it has no effect. The indent can be obtained by starting the first line with an empty object (Section 1.5):

```
@IndentedDisplay lines @Break @I {
{}    And finde
   What winde
Serves to'advance an honest minde.
}
```

The result is

And finde
What winde
Serves to'advance an honest minde.

as desired. To set the entire document in a paragraph breaking style other than adjust, you need to change the @InitialBreak option, as explained at the end of Section 1.10.

Some people don't like to see the first line of a paragraph alone at the foot of a page or column (the rest appearing on the next page). You can instruct Lout not to allow this with

```
unbreakablefirst @Break ...
```

meaning that the first line cannot be broken off from the rest of the paragraph. Similarly,

```
unbreakablelast @Break ...
```

instructs Lout to prevent the last line of a paragraph from appearing alone at the top of a page or column. These features would probably be invoked in the @InitialBreak option, like this:

```
@InitialBreak { unbreakablefirst unbreakablelast hyphen adjust 1.2fx }
```

You can turn them off with breakablefirst @Break and breakablelast @Break. In both cases Lout makes it happen by breaking at the previous place, either between paragraphs or two lines from the end of a paragraph. Alternatively, both features are compatible with Lout's @OptimizePages option, which will optimize the overall page layout of the document subject to these requirements.

1.10. Line spacing

The @Break symbol also controls the amount of space placed between the lines of paragraphs. This distance is best given using the v unit of measurement: 1v is the current line separation (see Section 1.2 for a description of lengths in general). For example,

```
2vx @Break ...
```

produces double spacing in the paragraphs of the following object, and

```
0.9vx @Break ...
```

produces cramped spacing, which can be useful in large tables that don't quite fit on one page. The x following the v is required, but its meaning is beyond our scope [5].

To set the entire document in a different line spacing from the default, you need to change the @InitialBreak option. If you are using your own setup file (Section 4.1), change it there. If not, you can change it at the beginning of your document, as described in Section 3.1.

The default value of the @InitialBreak option produces the adjust paragraph breaking style with a line spacing of 1.20 times the current (that is, the initial) font size, and hyphenation on:

```
@InitialBreak { adjust 1.20fx hyphen }
```

To get double spacing, change it to

```
@InitialBreak { adjust 2.40fx hyphen }
```

To get ragged paragraphs with hyphenation off, change it to

```
@InitialBreak { ragged 1.20fx nohyphen }
```

and so on. It is a good idea to define the initial line spacing using the f unit, since then if you change the initial font size the line spacing will change with it. However, any length (Section 1.2) with an x appended will do: 14px for 14 point, 0.5cx for 0.5 centimetres, etc. Don't use the v unit though, because it refers to some *previous* line spacing, whereas here we are defining the line spacing for the first time.

1.11. Hyphenation

The @Break symbol also controls hyphenation: hyphen @Break turns it on, nohyphen @Break turns it off. For example, ragged breaking is often done without hyphenation:

```
@IndentedDisplay { ragged nohyphen } @Break {
This little paragraph will appear with
ragged ends to its lines.
}
```

Lout's method of choosing hyphenation points is copied from the TEX system, except that Lout will never place a hyphen within a sequence of characters that form a ligature (fl and fi are the most common ligatures).

Hyphenation usually works well by itself; you should never need to interfere with its ideas of what to do. However, if you do want to tell Lout where you think a hyphen could be inserted, you can use the &- symbol:

```
after&-math
```

If &- occurs directly after a hyphen character, hyphenation will be permitted but no extra hyphen will be inserted. To prevent hyphenation of a word, enclose the word in a @OneCol symbol.

To turn hyphenation off throughout the document, you need to set the @InitialBreak option to nohyphen, as described at the end of Section 1.10.

1.12. Underlining

The @Underline symbol underlines the following object:

```
This little paragraph of text will have
@Underline { three underlined words } in it.
```

produces

This little paragraph of text will have three underlined words in it.

The underlining is continuous unless a line break intervenes. You can't use this symbol to underline an arbitrary object: it is carefully designed to produce high-quality underlining of single words and parts of paragraphs, and it works only for those objects.

Each font contains information about how words in that font should be underlined: how far below the baseline the line should be drawn, and how thick. The @Underline symbol uses this information; the font it bases its underlining on is the font of the first object underlined if it is a word, or else the font of the enclosing paragraph.

1.13. The current date and time

The @Date and @Time symbols produce the current date and time:

```
It is now @Time on @Date.
```

produces something like

It is now 1.05 p.m. on 2 March, 1999.

The result depends on the current language.

Both symbols have a @Format option that changes the format of the result:

```
@Date @Format { @DayNum"/"@MonthNum"/"@ShortYear }
```

The result is the @Format option with the symbols replaced by the appropriate values:

2/3/99

The / characters have been enclosed in double quotes for the usual reason (Section 1.4).

Here is the full list of symbols that you can use within both @Format options:

@Year	The year, e.g. 1994
@ShortYear	The last two digits of the year, e.g. 94
@Month	The month, e.g. December
@ShortMonth	The month abbreviated, e.g. Dec
@MonthNum	The number of the month, between 1 and 12
@Day	The day of the week, e.g. Saturday
@ShortDay	The day abbreviated, e.g. Sat
@DayNum	The day of the month, between 1 and 31
@MeriDiem	a.m. or p.m.
@ShortMeriDiem	am or pm
@Hour	The hour, between 00 and 23
@ShortHour	The hour, between 0 and 23
@TwelveHour	The hour, between 1 and 12
@Minute	The minute, between 00 and 59
@Second	The second, almost always between 00 and 59

The default format for @Date in English is

```
@Date @Format { @DayNum @Month, @Year }
```

and the default format for @Time in English is

```
@Time @Format { @TwelveHour.@Minute @MeriDiem }
```

Both default formats depend on the current language, and so do @Month, @ShortMonth, @Day, and @ShortDay,@MeriDiem and @ShortMeriDiem.

1.14. Languages other than English

When part of a document is written in a language other than English, Lout should be informed of this using the @Language symbol:

```
... the garter, he said:  French @Language { ‘Honi soit qui mal y
pense’ }, and this saying ...
```

Changing language is quite analogous to changing font using the @Font symbol.

Since accented characters (Section 1.4) are always available irrespective of the language, at first sight it might seem that there is no need to bother informing Lout what language you are writing in. However, words are hyphenated differently depending on the language, and some symbols have different results in different languages. For example,

```
Danish @Language @Date
```

produces

2. marts, 1999

and the alphabetic list symbols of Section 2.2 also vary with the current language. So it’s worth

doing for the sake of knowing that non-English parts will appear as they should.

At the time of writing, the following languages were available:

Czech Cesky Cestina
Danish Dansk
Dutch Nederlands
English
EnglishUK
Finnish Suomi
French Francais Français
German Deutsch
Hungarian Magyar
Italian Italiano
Norwegian Norsk
Polish Polski
Russian
Slovenian Slovenia Slovenija
Spanish Español
Swedish Svenska

As shown, most languages have alternative names, all equally acceptable to the @Language symbol. EnglishUK differs from English only by applying hyphenation rules said to be more appropriate for British English. Hungarian does not yet allow hyphenation.

If your entire document is in a language other than English, you need to change the @InitialLanguage option:

```
@InitialLanguage { Deutsch }
```

If you are using your own setup file (Section 4.1), you can change it there. If not, you can change it at the start of your document, as explained in Section 3.1.

Czech, Polish, and Slovenian use the ISO-LATIN-2 character set, and users of these languages have to place

```
@SysInclude { latin2 }
```

at the very start of their documents in order to get access to the ISO-LATIN-2 versions of the fonts. These have family names such as TimesCE, CourierCE, HelveticaCE, and so on, to distinguish them from the same fonts encoded in ISO-LATIN-1. The face names are unchanged. Consult file latin2.fd in the standard include directory for a complete list of these fonts.

Russian uses Cyrillic characters. In principle, users of Russian have to place

```
@SysInclude { russian }
```

at the very start of their documents in order to get access to Cyrillic fonts. However no such fonts are distributed with the current version of Lout, so this line does nothing at present. Other left-to-right languages are easily added, so consult the author if your language is not listed.

1.15. Superscripts and subscripts

There are @Sup and @Sub symbols for producing superscripts and subscripts:

```
2 @Sup nd
```

produces

2^{nd}

and the @Sub symbol works in a similar way. These symbols are probably never required in English language text, since the only uses for them are in footnotes, which produce the superscript automatically, and equations, which have their own versions of these symbols. Both symbols have a gap option which determines the vertical spacing.

1.16. Verbatim text

The @Verbatim symbol[1] prints the following object exactly as it appears in the input file. All special meanings for characters, symbols, etc. are turned off; there is one result line for each input line. For example,

```
@IndentedDisplay @Verbatim {
A line of "verbatim" text
Another line, with a \ character
}
```

has result

```
A line of "verbatim" text
Another line, with a \ character
```

Use @F @Verbatim { ... } to get the result in a fixed-width font.

If the verbatim text contains { or } characters, then they should either be balanced or else you need to use the alternative form

```
@Verbatim @Begin
...
@End @Verbatim
```

so that there is no doubt about where the verbatim text ends. Although we have said that there are no special meanings, there is one exception to this rule: @Include and @SysInclude commands are recognized, allowing all or part of the verbatim text to come from some other file.

Occasionally the first line of some verbatim text begins with some spaces that have to be preserved. This is a problem for @Verbatim because it ignores all white spaces following the opening brace and all white spaces preceding the closing brace. However, the alternative @RawVerbatim symbol stops ignoring white spaces at the opening as soon as a newline character

[1] Prior to Version 3.13 the @Verbatim symbol was implemented in a way that restricted its availability to Unix systems only. This restriction no longer applies.

is reached; in other words, it will preserve all white spaces following the first newline.

1.17. Drop capitals

There are two symbols for producing drop capitals, @DropCapTwo and @DropCapThree. Place the capital to be dropped just before the symbol, and the rest of the paragraph after it:

```
I @DropCapTwo {
t is a truth universally acknowledged, that a single man
in possession of a good fortune, must be in want of a wife.
}
```

produces the object

It is a truth universally acknowledged, that a single man in possession of a good fortune, must be in want of a wife.

@DropCapThree is the same except that the capital is larger and spreads over three lines.

Because Lout occasionally gets the height of the enlarged capital slightly wrong, there is a height option which allows you to change the height if you need to:

```
H @DropCapTwo height { 1.5v }
{
  ...
}
```

This shows the default value for the height of the capital in @DropCapTwo: 1.5 times the current inter-line spacing. The default height in @DropCapThree is 2.5v.

These symbols produce an object which may appear anywhere in the usual way. A paragraph symbol will be needed after the paragraph. The paragraph breaking style of the body of the paragraph will be adjust nohyphen; this cannot be changed at present.

1.18. Alternative conventions for white space

As Section 1.3 explains, when two objects are separated by one or more white space characters (spaces, tabs, and newlines), this same amount of white space will separate the two objects in the output.

Two other conventions for interpreting these white spaces have been used in other document formatting systems. Roughly, they are:

troff Like Lout, except that at every point where a sentence ends at the end of an input line, add one extra space in the output.

TEX Replace all sequences of two or more white spaces by one. Then, at every point where a sentence ends, whether or not it is at the end of a line, add one extra space in the output.

Lout offers these two alternative conventions by means of the @InitialSpace option. This is similar to the @InitialFont option described at the end of Section 1.6, in that you can set it at the beginning of your document, like this:

```
@SysInclude { doc }
@Document
   @InitialSpace { lout }
//
@Text @Begin
...
@End @Text
```

or you can set it in the setup file. The above example shows the default value, lout, which produces Lout's usual spacing; the alternative values are troff and tex.

How to tell whether a sentence has ended is a vexed question. For the troff method, Lout looks for a word at the end of a line ending in one of '.', ':', '?', or '!' optionally followed by either a right quote character or a right parenthesis. Actually, this depends on the current language (Section 1.14); the rule just given is for English, and other languages may differ.

The tex rule for where a sentence ends is slightly more complicated. Lout looks for a word, not necessarily at the end of an input line, which ends as described for troff but in addition has a lower-case letter preceding that.

In all cases you must use a paragraph symbol, such as @PP or @LP, to separate your paragraphs. The common convention of other systems, that a blank line marks a paragraph, is never true of Lout.

Whatever rule is adopted, there are occasional exceptions where you will have to indicate explicitly whether you want an ordinary space or a between-sentences space. For this there are two symbols, ~ (ordinary space) and ~~ (between-sentences space). For example,

```
Dr.~Kingston
```

will produce an ordinary space between the two words, even with tex which would otherwise consider that spot to be the end of a sentence. Spaces adjacent to these two symbols have no effect on the result. Please note however that ~ produces an unbreakable space (that is, one that will never be replaced by the end of a line) in contrast to just leaving a space, which is breakable.

Chapter 2. Adding Structure to Documents

2.1. Displays

The @Display symbol displays the following object in the centre of the page or column:

```
@Display @I { Invitation to Afternoon Tea }
```

has result

Invitation to Afternoon Tea

Space is inserted automatically above and below the display; no paragraph symbols are needed.

To make the display appear at the left margin instead of centred, use @LeftDisplay instead of @Display. To make an indented display, use @IndentedDisplay or @QuotedDisplay; the latter indents at the right margin as well as at the left. There are also @CentredDisplay and @Centered-Display symbols which centre the display just like @Display does, and @RightDisplay which right-justifies the display.

If you use displays frequently you might prefer abbreviated forms of their names. These are made from @ and the capital letters of the full name: @D, @LD, @ID, @QD, and @CD. Owing to a clash with the name of another symbol, @RightDisplay has no abbreviation.

Displays often need to be set using a different font, paragraph breaking style, and so on to the surrounding text. It's best to set out such displays like this:

```
@CentredDisplay @I clines @Break {
Invitation to Afternoon Tea
with
Mr. and Mrs. Gilbert Newington-Smith
}
```

You can have as many of these symbols as you like, including specialized ones like @CurveBox and @Tbl. The only rule is that the display symbol must come first: @I @Display ... is wrong.

It's not a good idea to have one display immediately followed by another one, because there will be too much vertical space between them. Use a list instead (Section 2.2). Displays at the ends of paragraphs look awkward and are best avoided.

A display may come out partly on one page or column and partly on the next, if it has places where it obviously can be broken in two. For example, a display which is an ordinary paragraph of text might be broken in two between any two lines. To force a display to keep together on one page or column, use the @OneRow symbol like this: @Display @OneRow { ... }.

Other display symbols produce aligned and numbered displays, and raw displays (i.e. without vertical space). Although these can display any object as usual, in practice they are used

for mathematics, so they are described in Section 7.5.

Three setup file options control the appearance of displays. (For a general introduction to setup files and their options, consult Section 4.1.) Here they are with their default values:

```
@DisplayGap { 1.00v }
@DefaultIndent { 0.5rt }
@DisplayIndent { 2.00f }
```

@DisplayGap is the amount of vertical space inserted before and after displays, and may be any length (Section 1.2). The default value, 1.00v, is equal to the current inter-line spacing.

@DefaultIndent is the indent produced by @Display; 0.5rt produces centring, although why it does so is beyond our scope [5]. @DisplayIndent is the indent for @IndentedDisplay, and used at both margins by @QuotedDisplay. Its default value, 2.00f, is twice the current font size.

2.2. Lists

The @List symbol introduces a sequence of items to be made into a displayed list:

```
preceding text
@List
@ListItem @I Emma
@ListItem @I { Mansfield Park }
@EndList
following text
```

After the initial @List symbol, each item is introduced by @ListItem, and the list ends with @EndList. The result here is

preceding text

Emma

Mansfield Park

following text

with @DP inserted automatically before, between, and after the items.

As the example shows, the @List symbol causes the items to be indented. Also available are @LeftList, @IndentedList, @QuotedList, @CentredList, and @CenteredList, which format the items like the corresponding display symbols do. Other list symbols generate a *label* for each item. For example, @NumberedList causes the items to be numbered:

```
@Heading { Quiz }
@NumberedList
@ListItem { Which American statesman owned a two-storey clock? }
@ListItem { Which Yankee commander from the Civil War cut a
swathe of destruction through the State of Georgia? }
@EndList
```

has result

Quiz

1. Which American statesman owned a two-storey clock?

2. Which Yankee commander from the Civil War cut a swathe of destruction through the State of Georgia?

The generated labels are added at the left margin. Here is the full set of label-generating list symbols, showing the first label produced by each:

1.	@NumberedList	(1)	@ParenNumberedList
i.	@RomanList	(i)	@ParenRomanList
I.	@UCRomanList	(I)	@ParenUCRomanList
a.	@AlphaList	(a)	@ParenAlphaList
A.	@UCAlphaList	(A)	@ParenUCAlphaList
•	@BulletList		
∗	@StarList		
–	@DashList		

The Roman numerals end at cc (200), but ordinary decimal numbers have no limit. The labels produced by the four alphabetical list symbols are determined by the current language; in English they start at a and end at z.

You may also supply your own labels using the @TaggedList symbol. Each item is introduced by @TagItem instead of @ListItem. Since such labels tend to be quite wide, there are @WideTaggedList and @VeryWideTaggedList symbols which leave extra space for them:

```
@WideTaggedList
@TagItem { 9 a.m. } { Breakfast in the Ipamena Lounge,
served with Irish coffee and fresh croissants. }
@TagItem { 10 a.m. } { Prof. A. Smith
speaks on 'The Wealth of Nations.' }
@EndList
```

Each @TagItem symbol is followed by the desired label between braces, and then the item proper. The label may be empty, but still its enclosing braces must be there. The result here is

9 a.m. Breakfast in the Ipamena Lounge, served with Irish coffee and fresh croissants.

10 a.m. Prof. A. Smith speaks on 'The Wealth of Nations.'

An alternative way to accommodate wide labels is the 'drop item,' which looks like this:

10 a.m.
    Prof. A. Smith speaks on 'The Wealth of Nations.'

Individual items are dropped in this way by using @DropTagItem instead of @TagItem. There is also a @DropListItem symbol corresponding to @ListItem, but it is very rarely needed. Lout

is not able to decide for itself whether a label is wide enough to require a drop item.

Each list has a 'raw' version which omits the preceding space, and @EndList has a raw version which omits the following space. These are mainly used when an item is itself a list:

```
@ParenNumberedList
@ListItem {
  @RawParenRomanList
  @ListItem { MV Nominees,
hereinafter called the vendor, ... }
  @RawEndList
}
@EndList
```

produces

(1) (i) MV Nominees, hereinafter called the vendor, …

If @ParenRomanList had been used instead of @RawParenRomanList, (1) and (i) would have appeared on different lines; or if @EndList had been used instead of @RawEndList, there would have been too much space following the list.

A list item may come out partly on one page or column and partly on the next, if it has places where it obviously can be broken in two. For example, a list item which is an ordinary paragraph of text might be broken in two between any two lines. To force a list item to keep together on one page or column, use the @OneRow symbol like this: @ListItem @OneRow { ... }.

Occasionally it is desirable to start a new page or column between two list items. This cannot be done by inserting @NP between them, because the space between two list items is a kind of no-man's land where nothing is allowed to be. Instead, the @ListNewPage symbol is used: it is permitted only between two list items, and its effect is to make the following list item appear at the top of the next page or column. It may be used within any kind of list.

Another special list item is @ListInterruptItem. This prints its content without any numbering or formatting:

```
@NumberedList
@ListItem { This is the first list item. }
@ListInterruptItem { This is an interruption to the list. }
@ListItem { This is the second list item. }
@EndList
```

produces

1. This is the first list item.

This is an interruption to the list.

2. This is the second list item.

Although @ListInterruptItem is written like a list item, the result appears to be an interruption to the list. It may be used in any kind of list.

Every symbol introduced in this section has an abbreviated form consisting of @ followed by its capital letters only. For example, @RawNumberedList abbreviates to @RNL, and @ListItem to @LI. The sole exception is @RawList, which has no abbreviation because @RL is the abbreviation for @RomanList.

Expert users will be interested to learn that all of the list symbols described in this section are derived from the two basic ones, @List and @RawList, merely by setting options. Here are all the options, together with their default values:

```
@List
  style {}
  labelwidth { 2f }
  indent { 0c }
  rightindent { 0c }
  gap { 1v }
  start { 1 }
```

These options may be used with all of the list and raw list symbols, except that some combinations don't make sense, for example indent with @CentredList or style with @BulletList, since the list symbol has clearly already set the option.

The style option determines the format of the label, any num symbol within it being replaced by the number of the item. For example, @ParenNumberedList is just

```
@List
  style { (num) }
```

and @BulletList is just

```
@List
  style { @Bullet }
```

with num not mentioned since no number is wanted. It is not possible to change the style of @TaggedList and its variants, since it is set to produce the label supplied by the author.

The labelwidth option determines the width set aside for the labels; this is where @WideTaggedList and @VeryWideTaggedList differ from @TaggedList. The indent and rightindent options determine the space left blank at the left and right margins. The value given to these three options may be any length, for example 0.5i (half an inch), or 0.5f (half the current font size). Section 1.2 describes lengths in general. There are also three useful symbols denoting lengths: @DisplayIndent is the amount by which indented and quoted displays are indented; @WideIndent and @VeryWideIndent are the indents used by @WideTaggedList and @VeryWideTaggedList. Using these symbols helps to keep documents consistent.

The gap option determines the vertical space inserted between items. Once again this must be a length, although since it is vertical rather than horizontal, somewhat different kinds of lengths are appropriate: 1.5v for 1.5 times the current vertical space between lines, or the default value, @DisplayGap, which produces the amount of vertical space used before and after displays. There is no option for the space before or after the list as a whole; to change this, use a raw list and insert your own.

The start option is the number assigned to the first item. It must be decimal:

```
@ParenRomanList
   start { 25 }
```

looks strange, but it is the correct way to number the first item (xxv).

Here is a larger example of these options in action. Setting both indent and rightindent to @DisplayIndent produces an effect similar to @QuotedDisplay:

```
preceding text
@List
   style { @I {Item num}: }
   indent { @DisplayIndent }
   rightindent { @DisplayIndent }
   labelwidth { @WideIndent }
   start { 10 }
@ListItem { The vendor ... in the case of accident. }
@ListItem { The vendor ... adjacent to the facility. }
@EndList
following text
```

The result is

preceding text

Item 10: The vendor will not be liable for any injury caused by the escape of radiation or radioactive materials from the facility, nor for the costs of repair of any property damaged by nuclear blast or fallout in the case of accident.

Item 11: The vendor will not be liable for any injury caused by radioactive materials being transported to or from the facility, nor for injury caused by radioactive materials stored adjacent to the facility.

following text

You can change the *default* values of the labelwidth, indent, rightindent, and gap options, by setting options called @ListTagWidth, @ListIndent, @ListRightIndent, and @ListGap in the setup file (Section 4.1). These default values will then apply automatically to every list in the document unless overridden by an option, just as the usual default values do.

2.3. Footnotes and endnotes

A footnote is created by typing

```
@FootNote { Like this. }
```

after the word that the footnote refers to. It will be numbered automatically and placed at the foot of the page or column;[1] or, if space there is insufficient, it may start on or run onto the following

page or column. The footnote must be enclosed in braces.

The @FootNote symbol has a @Location option which determines where it goes:

```
@FootNote
   @Location { ColFoot }
{ ... }
```

places the footnote at the bottom of the column, and

```
@FootNote
   @Location { PageFoot }
{ ... }
```

places it at the bottom of the current page, occupying the full page width even in a multi-column document (this is occasionally useful for footnotes to headings). Of course, in a single-column document there is no difference anyway. The default value of the @Location option is ColFoot.

Endnotes work in exactly the same way as footnotes, except that the symbol to use is @EndNote and they appear either at the end of the document or at the end of some major part of it, depending on the type of document (Chapter 3). Endnotes are always column width and so have no @Location option.

Footnotes are usually labelled with consecutive Arabic numberals, but you can tell Lout to label a footnote (not an endnote) with something else, like this:

```
@FootNote
   @Label { @Dagger }
{ This footnote will be labelled with a dagger, not a number. }
```

whose result should appear at the bottom of this page.† Symbols commonly used for footnote labels include @Dagger (†), @DaggerDbl (‡), @Star (∗), @SectSym (§), and @ParSym (¶), but you can use any object. If you want no label at all, use an empty object like this:

```
@FootNote
   @Label {}
```

Footnotes with a @Label option are excluded from the automatic numbering that applies to other footnotes.

The language of a footnote or endnote will be the language of the document as a whole. This is not necessarily the same as the current language at the point where the footnote or endnote occurs, or even the language of the enclosing large-scale structure symbol. It may be necessary to enclose the body of the footnote in a language symbol, like this:

```
@FootNote { French @Language { ... } }
```

Doing it the other way (French @Language @FootNote ...) is not effective.

---

[1] Like this.

† This footnote will be labelled with a dagger, not a number.

A footnote attached to the very last line of a chapter or appendix of a book occasionally runs onto the first page of the following chapter or appendix, and this looks very poor. If this happens, the solution is to place an @LP after the last line (including the footnote).

In the rare case where more than one footnote is attached to one word, use @AnotherFootNote for the second and subsequent footnotes:

```
something or other.
@FootNote { The first footnote. }
@AnotherFootNote { The second footnote. }
```

This ensures that the superscripts will be separated by commas, as convention demands.

The setup file contains a number of options for controlling the appearance of footnotes. (See Section 4.1 for a general introduction to setup files and their options.) Here are all the options, with their default values:

```
@FootNoteThrough { No }
@FootNoteLocation { ColFoot }
@FootNoteNumbers { Arabic }
@FootNoteFont { 0.80f }
@FootNoteBreak { 1.20fx }
@FootLen { 2.00c }
@FootAboveGap { 1.00v }
@FootGap { 0.20c }
```

There are also setup file options for controlling endnotes. Since they are quite similar to the ones for footnotes, we won't say any more about them here.

@FootNoteThrough may be Yes or No; Yes means that the footnotes are numbered continuously through the document (or through each chapter in the case of books); No means that the numbering begins afresh on each page. @FootNoteLocation determines the default value of the @Location option mentioned above; it may be either ColFoot or PageFoot. @FootNoteNumbers determines how the footnotes are numbered; it may be Arabic, Roman, UCRoman, Alpha, or UCAlpha.

@FootNoteFont and @FootNoteBreak determine the font and paragraph breaking style of footnotes. The default value of @FootNoteFont produces the same font family and face as the bulk of the document, but reduced to 0.8 times the original size.

@FootLen determines the length of the small horizontal line drawn above the footnotes; @FootAboveGap determines the minimum space to be left clear above this line; and @FootGap determines the vertical separation between footnotes. All three may be any length.

2.4. Margin notes and arbitrary placement

A note can be placed in the left margin by typing

A left note.

```
@LeftNote { A left note. }
```

after the word that the note refers to. The note will appear in the margin at the same height on

the page as that word, unless that would cause it to overlap a previous margin note, in which case it will be shifted downwards (but never onto the next page). The note may be an arbitrary Lout object; for example, you might type

A left note.

```
@LeftNote @I { A left note. }
```

to make your note come out in italics.

You can get a note in the right margin by using @RightNote instead of @LeftNote. To get a note in the outer margin (left on even pages, right on odd pages), use @OuterNote; and for the opposite, use @InnerNote.

A right note.

An inner note.

An outer note.

By default, Lout produces margins that are 2.5 centimetres wide, which is not really enough to accommodate reasonable margin notes. To change these margins, you need to change options in the setup file, as explained in Section 4.3.

The appearance of the margin notes themselves is also determined by options in the setup file (for a general introduction to setup files and their options, consult Section 4.1). Here are the options and their default values:

```
@MarginNoteFont { 0.80f }
@MarginNoteBreak { ragged 1.10fx }
@MarginNoteHGap { 0.5c }
@MarginNoteVGap { 1.00v }
@MarginNoteWidth { 1.50c }
```

@MarginNoteFont determines the font; the default value produces the current font scaled to 0.8 times the current size. Slope 0.80f would yield italic notes, and so on. @MarginNoteBreak is the paragraph breaking style, similar to the @InitialBreak setup file option.

@MarginNoteHGap determines how far away from the adjacent text column the margin note will appear; the default value is 0.5 centimetres. @MarginNoteVGap is the minimum vertical separation between margin notes (i.e. it determines how far downwards a note will be shifted to avoid the previous one). @MarginNoteWidth determines the width of the column in which margin notes (both left and right) are set; the default value of 1.5 centimetres is suited to the 2.5 centimetre page margins that are the default, but if you widen the page margins you will be able to increase @MarginNoteWidth too.

Left notes extend into the left margin a total distance of @MarginNoteHGap plus @MarginNoteWidth, and it is up to you to make sure that this does not put them off the page. Similar remarks apply to right notes. And since notes are never shifted to the next page, only downwards, there is also a risk that a note will be shifted off the bottom of the page, if it is very long or if preceding notes obstruct it. Again, it is up to you to avoid this problem by keeping your notes small and not too close together.

Margin notes inside footnotes, figures and tables work well. Margin notes in multi-column documents are disastrous unless used very sparingly. Margin notes do not appear in plain text output (Section 3.6).

A more radical way to place objects at arbitrary points on the current page is provided by the @Place symbol:

```
@Place
   x { right - 1 cm - xsize }
   y { { foot + top } / 2 }
{
   @Box { Hello }
}
```

The placed object may be any object. This particular example produces a box whose *x* (horizontal) position is such that its right edge is one centimetre from the right edge of the page, and whose *y* (vertical) position is halfway up the page.

In addition to numbers, Lout lengths (Section 1.2), and Diag lengths (Section 9.11), the following symbols may be used inside the x and y options:

left	The left edge of the page
right	The right edge of the page
foot	The foot edge of the page
top	The top edge of the page
+	Addition (positive is to the right and up)
-	Subtraction (negative is to the left and down)
*	Multiplication
/	Division
xsize	The width of the object being placed
xmark	The column mark of the object being placed (for expert users)
ysize	The height of the object being placed
ymark	The row mark of the object being placed (for expert users)

Hello

The usual precedences and associativities apply to the mathematical operators; braces (not parentheses) may be used for grouping. It is best to give values to x and y that do not depend on any assumptions about where the coordinate system's origin is; this is true of the examples above. At the point where @Place occurs, the result is an empty object. As with margin notes, Lout does not know what is happening and will not lay out the rest of the page around the placed object.

2.5. Theorems, lemmas, corollaries, definitions, propositions, examples, and claims

A theorem is created like this:

```
@LD @Theorem
   @Title { Fermat's Last Theorem }
{
@Eq { a sup n + b sup n != c sup n } for all positive integers @Eq { a },
@Eq { b }, @Eq { c } and @Eq { n } when @Eq { n > 2 }.
@LP
@Proof I have a proof of this theorem, but the margin
is too small to contain it. @EndProof
}
```

where we have used the @LD 'left display' symbol from Section 2.1 to get a left-justified display, and the @Eq symbol from Chapter 7 for the equations. The result is

> **Theorem 2.1 (Fermat's Last Theorem):** $a^n + b^n \neq c^n$ for all positive integers a, b, c and n when $n > 2$.
>
> **Proof:** I have a proof of this theorem, but the margin is too small to contain it. □

The @Theorem symbol produces an object with no adjacent vertical space, hence it needs to be used in conjuction with display or paragraph symbols. The theorem is numbered automatically, with the title and number inserted at the start of the first paragraph. @Title may be omitted.

@Proof produces **Proof:** with the appropriate following space, and @EndProof produces a box at the end of the line. They may be used anywhere, not just within theorems.

There are seven symbols that produce independently numbered sequences in this way. They are @Theorem, @Definition, @Claim, @Proposition, @Lemma, @Corollary, and @Example.

The setup file contains options which determine whether the theorem numbers include a chapter number (@ChapterNumInTheorems), or a section number (@SectionNumInTheorems), and so on. A section number automatically includes a chapter number, etc. There are also options to change the word printed. For example, if you need a sequence of conjectures, change the @ClaimWord setup file option to

```
@ClaimWord { Conjecture }
```

and use the @Claim symbol for your conjectures. You can even put

```
import @DocumentSetup
macro @Conjecture { @Claim }
```

into your mydefs file (Section 2.12) if you wish, so that you can write @Conjecture in your documents instead of @Claim.

Owing to problems behind the scenes, the @Theorem symbol and its companions have a potential efficiency problem: although all numbers are finalized on the second run, it takes Lout time proportional to the square of the highest theorem number to do this. So large numbers of theorems numbered together might be slow.

2.6. Figures and tables

Figures are created in a similar way to footnotes:

```
@Figure
   @Caption { Basser Lout }
@Diag vstrut { yes } treehsep { 1c } {
   @HTree { @Box Lout @FirstSub arrow { yes } @Box PostScript }
}
```

The @Figure symbol places the following object (which in this example is created using the advanced graphics features of Chapter 9) at the top of the following column or page, labelled by



Figure 2.1. Basser Lout

the @Caption option and automatically numbered. You can see this example at the top of page 38. Tables are obtained in the same way using @Table instead of @Figure.

@Figure and @Table each have an @InitialLanguage option which determines the language of the figure or table. If this is omitted, the language of the document as a whole will be used, not the language where the figure or table occurs.

The two symbols also have a @CaptionPos option, which determines whether the caption appears above or below the figure or table. The default is Below, the alternative is Above.

The question of what is a suitable running header to print on pages containing figures and tables (possibly from different sections) is a rather awkward one. On any page with a figure or table at the top, Lout uses whatever running header was appropriate for the text on the previous page. In practice it seems to work quite well.

If your document contains many figures, large figures, or multi-page figures, you are likely to encounter cases where Lout's assignment of figures to pages is not pleasing. In that case, you can improve things by moving the figures around within the body text, and by using the @Location option of the @Figure symbol, which determines where the figure will appear. Its possible values are

PageTop	The figure will appear at the top of the following page, occupying the full page width; or, if there is insufficient space there (owing to other figures already present), at the top of the first subsequent page with sufficient space.
EvenPageTop	Like PageTop except that the first page of the figure or table will be an even-numbered (left-hand or verso) page – useful for double-pace spreads.
FullPage	Like PageTop except that nothing else will appear on the same page as the figure except the usual running headers and footers, and possibly other FullPage figures and tables.[1]
EvenFullPage	Like FullPage except that the first page of the figure or table will be an even-numbered (left-hand or verso) page, like EvenPageTop.
PageFoot	The figure will appear at the foot of the current page, occupying the full page width; or, if there is insufficient space there, at the top of the following page and so on as for PageTop.
ColTop	The figure will appear at the top of the following column, occupying the column width; or, if there is insufficient space there, at the top of the first subsequent column with sufficient space. This is different from PageTop only in multi-column documents.
ColFoot	The figure will appear at the foot of the current column, occupying the column width; or, if there is insufficient space there, at the top of the following column as for ColTop. This differs from PageFoot only in multi-column documents.

[1]This location replaces the @FullPage option of earlier versions of Lout, which has been withdrawn.

ColEnd	The figure will appear in a column at the end of the document (or chapter, appendix etc. in the case of books). There is no PageEnd value corresponding to ColEnd.
AfterLine	The figure will appear as a column-width display immediately after the line in the final printed document in which it occurs.
TryAfterLine	The same as AfterLine unless there is insufficient space in the current column to hold the displayed figure, in which case it switches to ColTop instead.
Display	The figure will appear as a display at the point it occurs. There is no TryDisplay value corresponding to Display.
Raw	The figure will appear as an object, with no extra spacing, at the point it occurs. This is useful, for example, for getting two figures side by side in one display: use a displayed table containing two raw figures.

The @Table symbol also has this option. The default location is PageTop, but this can be changed by changing the @FigureLocation and @TableLocation setup file options.

The numbers assigned to figures and tables, and their ordering in any list of figures or tables, is based on where they appear in the final printed document, not on where they appear in the source files. This is better for the reader in the unusual case of a fixed figure being overtaken by a floating one. If a section number is printed as part of a figure number, and the figure floats forward from one section into another, the figure number will reflect the later section, not the earlier one as it should. You can fix this problem by moving the figure to an earlier point in the section, or by not having section numbers in figures (see below).

@Figure and @Table each have a @OnePage option, whose value may be Yes or No. Setting @OnePage to Yes causes the figure or table and its caption to be kept together on one page or column (enclosing the body of the figure or table in @OneRow would have the same effect except that it would not incorporate the caption, hence the need for this option). You need to be certain that the whole assembly will fit on one page when setting @OnePage to Yes.

The *default* value of the @OnePage option for each figure or table depends on the value of its @Location option as follows:

No	PageTop ColTop ColEnd Raw
Yes	PageFoot ColFoot Display AfterLine TryAfterLine

These choices represent a guess that figures that the user is happy to see at the page foot or in a display are probably going to be small enough to keep on one page, but that other figures may not be. In any case, these are only default values and you may set @OnePage as you wish.

By default, the body of the figure will be centred, and this usually looks best, at least for small figures. @Figure and @Table each have a @Format option which controls this format:

```
@Figure
  @Format { @CurveBox @HExpand @CC @Body }
```

Within the @Format option, the @Body symbol stands for the body of the figure or table; it must appear exactly once. Display symbols such as @CentredDisplay may not be applied to the @Body symbol; instead, there are @II, @QQ, @CC, and @RR, which indent, quote, centre, or

right-justify the following object. The example just given centres the figure inside a @CurveBox which is horizontally expanded (by the @HExpand symbol, which is not specific to figures) to occupy the full width of the page or column, rather than fitting snugly around the figure.

The @Format option applies to just the body of the figure, not to its caption. It applies to each page or column of a multi-page or multi-column figure; for example, the above format will draw a box around each page of a multi-page figure, and each page will be separately centred. ColEnd and Raw figures are exceptions to this rule: they always apply the format to the figure as a whole. This means that you cannot box multi-page figures of these two types, since the result would be an unbreakable object too large to fit on one page.

There are setup file options for controlling the appearance of figures and tables. Only those for figures will be given here, since the ones for tables are identical except that Table replaces Figure in their names. Here they all are:

```
@FigureLocation { PageTop }
@FigureFormat { @CC @Body }
@FigureWord { figure }
@FigureNumbers { Arabic }
@FigureCaptionPos { Below }
@CaptionFont { }
@CaptionBreak { }
@CaptionFormat { @B { number @DotSep @OneCol } }
@MakeFigureContents { No }
@FigureListWord { figurelist }
```

@FigureLocation is the default value of the @Location option of figures. Changing it, for example to FullPage, changes the location of all figures at once. You may still override this location for any individual figure, however, by giving that figure a @Location option. In a similar way, @FigureFormat is the default value of the @Format option (this shows why figures are centred by default) and @FigureCaptionPos is the default value of @CaptionPos.

@FigureWord determines the word that is part of the figure number. The default value, figure, produces 'Figure' or its equivalent in the current language; any other value produces itself.

@FigureNumbers determines whether figures are numbered automatically or not; the choices are None, Arabic, Roman, UCRoman, Alpha, and UCAlpha. Depending on the document type and where the figure or table occurs, the number might include a chapter number as well. This is determined by options in the setup file for your document type; for example,

```
@SectionNumInFigures { No }
```

appears in the report setup file, and means that a section number will not appear in the figure number (unless you change the option to Yes).

@CaptionFont and @CaptionBreak determine the font and paragraph breaking style used in the captions of figures and tables. Their default values are empty, meaning to use the initial font and break styles; but, for example, you could have

```
@CaptionFont { -2p }
```

in your setup file to get a smaller font size in your captions.

The @CaptionFormat option determines the format of the caption. Within it, the symbol number stands for the number of the symbol (including @FigureWord). Actually this option only controls the format of the number part of the caption, inserted at the beginning of the first paragraph of the caption.

You can get a list of figures at the start of your document by setting the @MakeFigureContents setup file option to Yes. The format of these lists will follow the format of tables of contents. These lists are only available in books (Section 3.3). The title printed above the list of figures is determined by the @FigureListWord option; the default value, figurelist, produces 'List of Figures' or its equivalent in the current language; any other value produces itself.

2.7. Large-scale structure: chapters, sections, etc.

Lout's large-scale structure symbols vary with the type of document (@Chapter for books, @Overhead for overhead transparencies, etc.), but they all work in the same way. Here is a typical example, @Section, as it would actually be used:

```
@Section
   @Title { Allocation of teachers }
@Begin
@PP
Apart from the usual need to avoid clashes, the allocation of teachers must
ensure that no teacher teaches more than seven periods per day, or ...
@End @Section
```

First comes the symbol itself, then any options in the usual way, and then the following object, enclosed in @Begin and @End @Section. The following object, also called the body of the section, may contain paragraphs, displays, and all the other features as usual. The body should begin with a paragraph symbol, which may be @PP or @LP as you prefer. The result is a section like the present one, automatically numbered, with the @Title option for its heading, preceded by a conditional new page symbol (Section 1.8).

When @Section symbols are used within an ordinary document, they must be bracketed by @BeginSections and @EndSections symbols, like this:

```
@SysInclude { doc }
@Doc @Text @Begin
preceding text
@BeginSections
@Section ... @End @Section
@Section ... @End @Section
...
@Section ... @End @Section
@EndSections
@End @Text
```

This arrangement is reminiscent of the one for lists, and, as for lists, there may be no paragraph

or new page symbols before, between, or after the sections. To change the gap between sections, you need to change the @SectionGap option in the setup file, as explained in Chapter 3.

The @Begin ... @End @Section that brackets the body of each section may be abbreviated to { ... }. However, the long form is recommended because it helps Lout to detect missing or extra braces within the body of the section.

All large-scale structure symbols have a @Tag option, whose use is explained in Section 2.8, and a @RunningTitle option. If running page headers have been requested, @RunningTitle will be used if it is given, otherwise @Title will be used for the running header. For example, the present section begins like this:

```
@Section
  @Title { Large-scale structure:  chapters, sections, etc. }
  @RunningTitle { Large-scale structure }
  @Tag { largescale }
@Begin
...
```

The point is that the section title is rather long for a running title, and so we use @RunningTitle to get an abbreviated version of it.

Section titles typically appear in Bold face in the section heading, but in Roman face in tables of contents and running page headers. So if part of your title is in italics, enclose it in @II rather than just @I to ensure that you get the right kind of italics in both contexts.

All large-scale structure symbols also have an @InitialLanguage option which sets the current language for the duration of that symbol. However, footnotes, endnotes, figures, tables, references, and index entries are set in the initial language of the document as a whole, unless you change their language explicitly using the @Language symbol.

The remainder of this section describes the setup file options for controlling the appearance of large-scale structure symbols. (For an introduction to setup files, consult Section 4.1.) These options mainly appear in the third @Use clause, since exactly which large-scale structure symbols exist depends on the type of document. For example, here are the setup file options from the doc setup file relating to appendices:

```
@AppendixWord { appendix }
@AppendixNumbers { UCAlpha }
@FirstAppendixNumber { 1 }
@AppendixHeadingFont { Bold }
@AppendixHeadingBreak { ragged 1.2fx nohyphen }
@AppendixHeadingFormat { number @DotSep title }
@AppendixGap { 2.0v @OrIfPlain 2f }
@AppendixInContents { Yes }
@AppendixNumInTheorems { No }
@AppendixNumInDisplays { Yes }
@AppendixNumInFigures { No }
@AppendixNumInTables { No }
@AppendixPrefix { }
```

There are similar options for each large-scale structure symbol. Here is a brief explanation.

@AppendixWord contains the word that is to be prefixed to the appendix number in full headings. The special value appendix produces Appendix or its equivalent translated into the current language. Any other value produces itself.

@AppendixNumbers determines the style of numbering of appendices, and may be Arabic, Roman, UCRoman, Alpha, UCAlpha, or None meaning unnumbered. Most common is Arabic, but appendices traditionally use upper-case letters, hence the value UCAlpha given above.

@FirstAppendixNumber { 1 } is the number (always in Arabic) to assign to the first appendix. It is almost always 1, but a few people like to start their numbering from 0; this is only possible if the style of numbering specified by @AppendixNumbers is Arabic.

@AppendixHeadingFont and @AppendixHeadingBreak specify the font and paragraph breaking style to be applied to the appendix heading (relative to @InitialFont and @InitialBreak); the default values shown above produce Bold in the current font family and size, and ragged breaking without hyphenation.

@AppendixHeadingFormat defines the format of the appendix heading. Within it, the symbols number and title stand for the appendix number (including the appendix word) and title respectively. The @DotSep symbol produces a dot and two spaces, except when there is no number, when it produces nothing. For example, to draw a full-width rule under the heading, change this option to

```
@AppendixHeadingFormat { number @DotSep title @LP @FullWidthRule }
```

Arbitrary formats are acceptable.

@AppendixGap determines the vertical space to leave between appendices; the default above leaves 2v, except that when plain text output is in effect it leaves 2f instead. To get a new page between appendices, use the magic value 2b, which is raw Lout for new page. In books, the major components (preface, introduction, tables of contents, parts, chapters, appendices, and indexes) always start on a new page and there is nothing you can do to change that.

@AppendixInContents determines whether the appendix will be listed in the table of contents, and may be Yes or No. The next few options determine whether an appendix number will be included in the numbers assigned to theorems etc., numbered displays, figures, and tables.

There is a @StructPageNums setup file option which determines whether page numbers will include the numbers of large-scale structure symbols. If it is Yes, @AppendixPrefix is prefixed to all page numbers of pages containing appendices. For example, setting @AppendixPrefix to APP- produces page numbers APP-A-1, APP-A-2, and so on. The object separating each element of such compound numbers is determined by the @NumberSeparator setup file option, which has default value . but which can easily be set to - or -- if desired.

Running page headers above appendices always include the title of the appendix, so there is no option for specifying whether to do so or not. But for subappendices and other such smaller units, the choice of whether to mention them in running headers is left to the user:

```
@SubAppendixNumInRunners { Yes }
```

Despite the misleading name, this option determines whether the entire subappendix *title* as well as number will be used as a running header.

2.8. Cross references

Cross references are a useful feature of documents, but they are a problem for authors. Suppose that at one point of your document you have

```
We hold these truths to be self-evident, that all men are created equal,
that they are endowed by their Creator with certain inalienable Rights,
that among these are Life, Liberty, and the pursuit of Happiness...
```

and that at some other point, earlier or later, you have

```
The anti-slavery cause, founded as it was on the Declaration
of Independence (page 181), could appeal to patriotic as
well as moral sentiments...
```

This is a *cross reference*, and the problem is that as the document is revised, the Declaration of Independence might move to page 185, and the cross reference must be found and changed.

Lout has a simple solution to this problem. Instead of writing the page number, write

```
The anti-slavery cause, founded as it was on the Declaration
of Independence (page @PageOf { decl.of.ind }), could appeal to
patriotic as well as moral sentiments...
```

instead, and at the point referred to, write

```
We @PageMark decl.of.ind hold these truths to be self-evident, that...
```

Inserting @PageMark decl.of.ind will not affect the result, but Lout makes a note of the number of the page on which the word preceding it appears, and inserts that number in place of @PageOf decl.of.ind. The tag, decl.of.ind, may be any simple word (actually Lout will accept a multi-word tag, but they are very inconvenient and better avoided). The braces are there, as usual, to control grouping: we don't want the following punctuation characters in the tag.

One tag called last.page is created automatically for you. @PageOf last.page gives the number of the last page of the document. For example, the result for this document is 239.

Cross referencing also applies to large-scale structure symbols such as @Chapter and @Section (any symbol with a @Title option), as well as @FootNote, @EndNote, @Figure, @Table, the numbered display symbols, and @ListItem and @DropListItem (but not @TagItem and @DropTagItem). Each of these symbols has a @Tag option:

```
@Section
  @Title { Cross references }
  @Tag { cross }
@Begin
@PP
Cross references are a useful ...
```

Now you can use the @PageOf symbol to find the number of the page on which the symbol's result begins, and the @NumberOf symbol to find its number:

```
For further information on this point, please consult
Section @NumberOf cross (page @PageOf { cross }).
```

produces

For further information on this point, please consult Section 2.8 (page 44).

Like all tags, the value of the @Tag option should be a simple word (although Lout does accept multi-word tags). Cross referencing of list items works best with parenthesized lists, since, for example, (16) looks good inside a paragraph but 16. does not.

To work cross references out, Lout has to process your document more than once, storing information between runs in special files it creates whose names end in .li and .ld. A complex document like this Guide requires five runs, but since every run produces a perfectly good PostScript file suitable for proof reading, in fact you need two runs to start with and one run per cycle of revision thereafter, only one more than would have been necessary in any case.

The cross referencing system assumes that each Unix directory contains only one Lout document (possibly spread over many files). If you keep several documents in one directory you can turn off the cross referencing with the -s flag:

```
lout -s simple > simple.ps
```

Since this will cause question marks to replace footnote and section numbers, and other products of cross referencing, it is only feasible for simple documents. Alternatively, you can reset cross referencing when switching from one document to another, by removing file lout.li. You should also remove this file if your document changes radically – from a report to a book, say.

2.9. Tables of contents

Lout takes note of the titles of all your large-scale structure symbols (Section 2.7) and what pages they begin on, and it uses this information to produce a table of contents like the one at the start of the present document. It is totally automatic; you do nothing.

Some details of the appearance of the table of contents, including whether to make one or not, are controlled by options in the setup file. The default setting is to make one in books but not to in other types of documents, but by changing the setup file you can have a table of contents in any type of document.

Section 4.1 describes setup files in general and how to change the options within them. The options relevant to tables of contents and their default values are:

```
@MakeContents { No }
@ContentsGap { 0.20v }
@ContentsGapAbove { 0.80v }
@ContentsGapBelow { 0.00v }
@ContentsLeader { .. }
@ContentsLeaderGap { 4s }
@ContentsRightWidth { 3f }
```

The @MakeContents option may be Yes or No, and determines whether a table of contents is

made or not. Its default value is No but it is set to Yes in the book setup file.

@ContentsGap determines how much vertical space to leave above each line of the table of contents, in addition to the usual single line spacing; its value may be any length (Section 1.2). The default value, 0.20v, is twenty percent of the current inter-line spacing.

Some entries, such as those for chapters and appendices in books, are more important than others. @ContentsGap does not apply to these entries; instead, @ContentsGapAbove and @ContentsGapBelow are used above and below each of them, again in addition to the usual single line spacing.

@ContentsLeader is the object which is repeated across the page to connect each entry with its page number; popular values are .. and . and the empty object. @ContentsLeaderGap determines how far apart these objects are; the default value, 4s, is four times the width of a space character. @ContentsLeaderGap may be 0s, but only if @ContentsLeader is non-empty.

@ContentsRightWidth reserves some space at the far right for page numbers. Any entry wide enough to intrude into this space is broken into two or more lines to keep it clear.

In addition to these options, each document type has options that determine which large-scale structure symbols will be listed in the table of contents. For example, among the options to the @BookSetup symbol in the book setup file are these:

```
@ChapterInContents { Yes }
@SectionInContents { Yes }
@SubSectionInContents { Yes }
@SubSubSectionInContents { No }
@AppendixInContents { Yes }
@SubAppendixInContents { Yes }
@SubSubAppendixInContents { No }
```

Each may be either Yes or No; these default values produce entries for everything except sub-subsections and sub-subappendices.

2.10. Indexes

Although Lout is not clever enough to guess what entries should go in your index, it will do almost everything else for you: sort the entries and attach the correct page numbers automatically. As for tables of contents, the default setting is to have an index in books but not in other types of documents. This and a few aspects of the appearance of the index can be changed by changing the setup file, as explained at the end of this section.

Now, suppose you are discussing Galileo and you want his name in your index. Let's be ambitious and say that you want the index to contain something like this:

```
Galileo Galilei
  life of, 201
  telescope, his use of, 201–203
  trial of, 205–211, 242, 395
```

Each line shows off one of Lout's four tricks: the first is a *raw entry* (no page number attached);

the second is a *sub-entry* (indented); the third has a *page number range* instead of a single page number; and the fourth is a *merged entry* (several page numbers or ranges within one entry).

We'll take each of them in turn in a moment, but first, let's see how to get a basic entry, like this one:

Galileo Galilei, 201

To get this into your index, type

```
galileo @Index { Galileo Galilei }
```

at the point where you mention Galileo. Nothing will be printed there, but the object following the @Index symbol will be placed in the index, with a comma and the correct page number appended automatically.

The object preceding the @Index symbol is a compulsory key which is used for sorting the index entries,[1] but which is not itself printed anywhere. It is best to construct these sorting keys from lower-case letters and the . character only, beginning with a letter, although multi-word keys are allowed. These sorting keys do not have to be distinct from the tags used in cross referencing; however, they do have to be distinct from each other, unless you want merged entries (see below).

Our first trick, raw entries (no page number attached), is very easy: just use @RawIndex instead of @Index. So the first line of our ambitious example is obtained by

```
galileo @RawIndex { Galileo Galilei }
```

This could go anywhere, since no page numbers are involved.

Another use for @RawIndex is to get blank lines into the index between the letters of the alphabet, by inserting phantom entries:

```
b @RawIndex {}
c @RawIndex {}
d @RawIndex {}
...
z @RawIndex {}
```

In fact there is a symbol called @IndexBlanks that makes exactly these 25 entries. Unfortunately, these blanks will occasionally appear at the top of a column, and if there are no tags beginning with x, for example, there will be two blank lines between the w and y entries. You can start off

---

[1]The collating sequence used to decide what comes after what is the collating sequence used by the memcmp() library routine (just the underlying binary character codes). Alternatively, the version of Lout installed on your system may use the strcoll() collating sequence, which understands accented characters and whose effect depends on your locale. To find out whether strcoll() is in use or not, type lout -V which prints out several lines of this and similar information.

If the sorting you get turns out to be not what you expected, the first thing to try is the replacement of all accented letters in index keys by unaccented ones. Sorting is quite an intractable problem: even if strcoll() gets the sorting right for one language, there still remains the problem of sorting multilingual indexes.

Lout's database mechanism assumes that the *tab* character is collated before any character that could appear in a sorting key. It seems that there are a few collating sequences in existence which do not satisfy this condition, and in these cases Lout will fail to produce the correct index.

with @IndexBlanks and replace it later by the appropriate subset, if necessary.[1]

Our second trick, sub-entries, is also very easy, since a sub-entry differs from an ordinary entry only by having an indent. The symbol is @SubIndex, so the second line of our ambitious example is produced by

```
galileo.life @SubIndex { life of }
```

You should always give sub-entries the same sorting key as their corresponding main entries, plus a . and another word, because then you can be certain that the sorting will place sub-entries directly after their main entries. There is a @SubSubIndex symbol that produces a double indent, and there are @RawSubIndex and @RawSubSubIndex symbols.

For our third trick, page number ranges, we use the to option of the @Index, @SubIndex, and @SubSubIndex symbols. For example, to produce the sub-entry

telescope, his use of, 201–203

put

```
galileo.telescope @SubIndex to { gt.end } { telescope, his use of }
```

at the beginning of the range, and

```
@PageMark { gt.end }
```

at the end. You can use any tag you like inside the to option, as long as it differs from every other tag (notice that sorting keys do not have to differ from tags, but to options do: this is because to options go into @PageMark like other tags do, and if two tags are the same we would have an ambiguous result of @PageOf). If both ends of the range fall on the same page, the to option is ignored: you will never get 201–201.

Our fourth and final trick is the merged entry:

trial of, 205–211, 242, 395

The main thing to grasp is that this merged entry was originally three separate entries (sub-entries in this case):

trial of, 205–211
trial of, 242
trial of, 395

We already know how to produce these three entries, using three @SubIndex symbols, one with a to option. Now we have discovered that Lout is able to merge several entries into one entry. This raises two questions: how does Lout know which entries to merge? and given those entries, what does the merging produce?

The answer to the first question is that Lout merges entries whose sorting keys are equal.

---

[1] For Lout to solve this problem automatically, it would need to be told which letter each index entry belongs under, perhaps by symbols @AIndex, @BIndex, etc. The author felt that this would have been too tedious.

The merged entry above is produced by these three entries, placed in the appropriate places:

```
galileo.trial @SubIndex to { gtrial.end } { trial of }
galileo.trial @SubIndex { trial of }
galileo.trial @SubIndex { trial of }
```

The entries are merged because they have the same sorting key (galileo.trial), not because they happen to have the same content (trial of). In fact, once the page numbers are added the content is not the same at all.

Now, having decided that the three entries

trial of, 205–211
trial of, 242
trial of, 395

must be merged, what does Lout do? It takes the second entry, discards any initial part that is the same as the first entry (trial of, in this case), and, if anything remains, it adds a comma, a space, and the remainder to the first entry, producing

trial of, 205–211, 242

in this case. This process is repeated on this and the third entry, producing

trial of, 205–211, 242, 395

in this case, and so on. The entries are merged in the order in which their points of origin appear in the final printed document.

If nothing remains after discarding the common initial part, nothing is added to the growing merged entry; in effect, the entry that could contribute nothing new is deleted. With this in mind, let us return to our initial, ambitious example:

Galileo Galilei
  life of, 201
  telescope, his use of, 201–203
  trial of, 205–211, 242, 395

We now know how to produce all four of these entries, but one problem of some practical importance remains. Suppose we delete the section on the life of Galileo. If we had put the entry that produces 'Galileo Galilei' in that section, we might inadvertently delete it, and the other two sub-entries will lose their main entry. Before deleting anything, we must hunt through it for index entries and ponder their significance, an error-prone and time-wasting thing to do.

The solution is as follows. When an index entry has sub-entries, make it raw, and repeat it just before each of its sub-entries:

```
galileo @RawIndex { Galileo Galilei }
galileo.life @SubIndex { life of }
```

at the first place,

```
galileo @RawIndex { Galileo Galilei }
galileo.telescope @SubIndex { telescope, his use of }
```

at the second, and so on. Now it is easy to verify that every sub-entry has a main entry; and when deleting a sub-entry we can and should delete the adjacent main entry. After sorting, our index entries will be

galileo	Galileo Galilei
galileo	Galileo Galilei
galileo	Galileo Galilei
galileo	Galileo Galilei
galileo	Galileo Galilei
galileo.life	life of, 201
galileo.telescope	telescope, his use of, 201–203
galileo.trial	trial of, 205–211
galileo.trial	trial of, 242
galileo.trial	trial of, 395

The first five entries have the same sorting key, and will be merged as required.

The language of the index entry will be the initial language of the document as a whole, which is not necessarily the language at the point where the index entry occurs. To get the correct language you will need a @Language symbol following the @Index symbol:

```
galileo. @Index French @Language { Galileo Galilei }
```

or whatever. If you don't do this your index entry might be hyphenated incorrectly.

Although the page numbers in index entries will be kept up to date automatically as the document changes, as all cross references are, it is best to refrain from inserting index entries until the document is complete and an overall plan of the structure of the index can be made.

The remainder of this section describes how to change the appearance of the index by setting options in the setup file. For setup files and their options in general, consult Section 4.1.

There are five setup file options for the index. Here they are with their default values:

```
@MakeIndex { No }
@IndexFont { }
@IndexBreak { oragged 1.2fx }
@IndexColumnNumber { 2 }
@IndexColumnGap { 1.00c }
```

The @MakeIndex option, which may be Yes or No, determines whether to produce an index or not. Although the default value is No, any type of document may be given an index just by changing it to Yes. This has already been done in the book setup file, but not in the others.

@IndexFont determines the font and font size of index entries (e.g. Times Base 12p). Leaving it empty as above produces the same font as the rest of the document. @IndexBreak is the paragraph breaking style applied to index entries; oragged is the traditional and best way.

@IndexColumnNumber and @IndexColumnGap determine the number of index columns per page, and the gap between them, and are exactly analogous to the @ColumnNumber and @ColumnGap options described in Section 2.11.

Lout offers the possibility of having up to three independent indexes (useful for glossaries, author indexes, etc.). The other two are called index A and index B, and they precede the main index in the output. Just replace Index by IndexA to refer to index A, and by IndexB to refer to index B. For example,

```
smith.j @IndexA { Smith, John }
```

will insert an index entry to index A, and @IndexBBlanks will insert the usual 25 blank entries into index B.

In large projects it might help to rename the @IndexA symbol to something else, such as @AuthorIndex. This can be done by placing

```
import @DocumentSetup
macro @AuthorIndex { @IndexA }
```

in the mydefs file. See Section 2.12 for an introduction to the mydefs file; the word macro is needed here instead of def because we are introducing a new name for an existing symbol, not defining a new symbol.

2.11. Multiple columns

You can change the number of columns of text per page, and the width of the gap between the columns, by changing these two setup file options:

```
@ColumnNumber { 1 }
@ColumnGap { 1.00c }
```

If you are using your own setup file (Section 4.1), you can find and change them there. If not, @ColumnNumber may be changed at the beginning of your document (Section 3.1).

@ColumnNumber may be any number between 1 and 10, with default value 1 as shown, and @ColumnGap may be any length (Section 1.2). The column width is derived from these options using the obvious formula

$$columnwidth = \frac{pagewidth - margins - (\text{@ColumnNumber} - 1) \times \text{@ColumnGap}}{\text{@ColumnNumber}}$$

You must ensure that this comes to something reasonable.

These two options do not apply to pages containing an index. For them there are similar setup file options called @IndexColumnNumber and @IndexColumnGap (Section 2.10).

Most document types permit you to have multiple columns, but certain things will be kept full width regardless of the @ColumnNumber option: figures and tables, chapter headings, and so on. The details vary with the document type, so are deferred to Chapter 3.

2.12. Defining new symbols

Whenever you find yourself typing the same thing repeatedly, you can save a lot of time by defining your own personal symbol to stand for that thing. For example, suppose you type your company's name, Batlow Food Distributors Pty. Ltd., frequently. You can define your own symbol, @Batlow say, so that

```
Concerning your crate supply contract with @Batlow, @Batlow wishes to ...
```

produces

> Concerning your crate supply contract with Batlow Food Distributors Pty. Ltd., Batlow Food Distributors Pty. Ltd. wishes to …

You will never have to type Batlow Food Distributors Pty. Ltd. again.

The method is to create a file called mydefs in your current directory, containing definitions like this:

```
import @BasicSetup
def @Batlow { Batlow Food Distributors Pty. Ltd. }
```

The meaning of the first line, import @BasicSetup, will be explained shortly. After that comes def for 'define,' then the name of the symbol being defined, then its value between braces. So this example defines a symbol called @Batlow to stand for the object following it between braces. Lout will read this file during its setup phase (Section 4.1).

Your symbols may have any names you wish made from letters and @. However, it is good practice to have exactly one @, at the start, and to choose distinctive names that have no chance of being the same as the name of any existing symbol. @Batlow is a good choice, for example.

The object between braces is quite arbitrary; in particular, it may contain symbols. For example, suppose you frequently need a small grey box:

```
import @BasicSetup
def @GreyBox { @Box paint { lightgrey } {} }
```

This defines a @GreyBox symbol that produces □. Most of the symbols in this guide are from the *BasicSetup package*, which is why import @BasicSetup is required: it makes these symbols available to the definition, and can actually be omitted before definitions like the one for @Batlow which do not use any symbols. However it does no harm, so we place it in front of every definition as a matter of course.[1]

Now suppose you frequently need a grey box, but enclosing different things: ENTRY one moment, EXIT the next. You could try omitting the {} from the definition above, but that does not work, because Lout notices the missing object while reading the definition, and inserts an empty object in the usual way (Section 1.5).

---

[1] Later chapters of this guide introduce specialized symbols for producing tables, equations, diagrams, graphs, and computer programs. You need a different import clause when using those symbols within a definition, because they are not from the BasicSetup package. Examples may be found in the chapters concerned.

However, there is a way to define a @GreyBox symbol so that @GreyBox ENTRY produces ENTRY, @GreyBox EXIT produces EXIT, and so on:

```
import @BasicSetup
def @GreyBox right x { @Box paint { lightgrey } x }
```

The addition of right x immediately after the symbol's name places @GreyBox into that class of symbols, like @I and @Box, which consume and transform the object to their right. The x in right x means that the object to the right will be referred to as x within the definition. So in

```
@GreyBox { Hello world }
```

@GreyBox consumes the following object, which becomes x, so that the value is

```
@Box paint { lightgrey } { Hello world }
```

which produces Hello world.

It is a good principle to choose symbol names that refer to what the symbol is for, rather than how it does what it does. Here is a good example:

```
import @BasicSetup
def @Poetry right x { lines @Break @I x }
```

This kind of name is very pleasant to use, since it allows you to forget about what is going on behind the scenes:

```
@IndentedDisplay @Poetry {
Teach me to hear Mermaides singing,
Or to keep off envies stinging,
    And finde
    What winde
Serves to'advance an honest minde.
}
```

Most of Lout's symbols follow this principle.

You can define symbols that consume the object to their left as well as the object to their right, as the @Font, @Break, and @Colour symbols do:

```
import @BasicSetup
def @HeadingBox left x right y
{  @Box { @CentredDisplay @Heading x y }
}
```

This definition occupies several lines only because it is long; as usual, end of line is the same as one space. Now

```
Cheating @HeadingBox {
The Department uses assignments ... of that student alone.
}
```

is much easier to type than the equivalent example in Section 8.2. The result is the same:

Cheating

The Department uses assignments both as a teaching device and as a major component of its assessment of each student. It therefore requires that all programs, exercises etc. handed in bearing an individual student's name be the work of that student alone.

Do not use a paragraph, display, or list symbol at the beginning or end of a definition, since the result is not what people who do it are hoping for.

Chapter 3. Types of Documents

Particular types of documents have specialized formatting requirements: title pages in books, abstracts in technical reports, and so on. Lout provides a range of *document types* with the appropriate specialized features for each type.

There are five types: ordinary documents, technical reports, books, overhead transparencies, and stand-alone illustrations. The features of all other chapters are available within each document type, but the features of one type are not available within other types.

3.1. Ordinary documents

Ordinary documents are the simplest kind, consisting of a plain sequence of numbered pages. To produce an ordinary document, use the doc setup file and the @Doc symbol:

```
@SysInclude { doc }
@Doc @Text @Begin
...
@End @Text
```

where … stands for the body of your document. This is the arrangement from Section 1.1 for getting started. Alternatively, you can begin with @Document instead of @Doc:

```
@SysInclude { doc }
@Document
   @InitialFont { Times Base 12p }
   @InitialBreak { adjust 1.2fx hyphen }
   @InitialSpace { lout }
   @InitialLanguage { English }
   @PageOrientation { Portrait }
   @PageHeaders { Simple }
   @FirstPageNumber { 1 }
   @ColumnNumber { 1 }
   @OptimizePages { No }
   @Unpaginated { No }
//
@Text @Begin
...
@End @Text
```

This shows all the options of @Document, with their default values. As usual with options, the options of @Document may be given in any order, and only the ones that need to be changed need be given at all. Notice the // after the last option. Its meaning is beyond our scope, but total disaster will ensue if it is forgotten. The @Doc symbol is an abbreviation for @Document //,

which is why you don't need // with @Doc.

The eight options are a selection of setup file options (Section 4.1) that frequently need to be changed. If your changes to the overall formatting are confined to these options, you can change them here and avoid having your own setup file. If you already have your own setup file, change them in either place and omit them in the other.

@InitialFont is the font of the bulk of the document, and should contain a family, a face, and a size. The default value selects the Times family, the Base face, and the 12 point size.

@InitialBreak controls the behaviour of paragraph breaking in the bulk of the document. It should have three parts: a paragraph breaking style (adjust, ragged, etc.), an inter-line spacing (1.2fx for single spacing, 2.4fx for double spacing, and so on), and either hyphen or nohyphen for turning hyphenation on or off. It may also have nobreakfirst or nobreaklast (or both), meaning to disallow a page break after the first line of a paragraph, or before the last, respectively.

@InitialSpace determines how Lout treats white space between two objects, as described in Section 1.18. @InitialLanguage determines the language of the bulk of the document.

@PageOrientation determines the orientation of the page. Its value may be Portrait (the default), Landscape, ReversePortrait, or ReverseLandscape. See Section 4.2 for further details.

@PageHeaders determines the appearance of page headers and footers throughout the document, and may be None, Simple, Titles, or NoTitles. Section 4.4 has the details, but just briefly, None means no page headers at all, Simple means a page number between hyphens at the top of each page except the first, Titles produces full running titles as in this guide, and NoTitles is like Titles with the running titles omitted, leaving just the page numbers.

@FirstPageNumber is the page number given to the first page.

@ColumnNumber is the number of columns per page in the bulk of the document, and may be anything from 1 (the default value) to 10. It is possible to produce full-width ordinary text in a multi-column document, using the @FullWidth symbol:

```
@SysInclude { doc }
@Document
   @ColumnNumber { 2 }
//
@Text @Begin
@FullWidth {
@CentredDisplay @Heading { NOTICE TO TRESPASSERS }
}Trespassers are hereby notified that, ...
@End @Text
```

This produces a full-width heading above a two-column body. The word Trespassers has been placed immediately after the closing brace of @FullWidth because (regrettably) any space here will appear before Trespassers in the output. Alternatively you could use a paragraph symbol:

```
@FullWidth {
@CentredDisplay @Heading { NOTICE TO TRESPASSERS }
}
@PP
Trespassers are hereby notified that, ...
```

You can have several @FullWidth symbols, producing full-width text wherever you want. Just be aware that @FullWidth always causes a fresh page to be begun, it will never appear on the same page as a figure or table, and it is not able to hold a table of contents, a section, or an appendix.

Lout ordinarily places lines onto a page until space runs out, then moves to the next page and so on. This often produces ugly empty spaces at the bottoms of pages preceding large unbreakable displays. Setting the @OptimizePages option to Yes causes Lout to examine the overall situation and try to minimize the ugliness, using the TEX optimal paragraph breaking algorithm. It takes two runs to do this, with intermediate results stored in Lout's cross reference database (Section 2.8); so deleting file lout.li will reset it, which might be wise after major changes. It is possible for the optimizer to cycle, never settling on a single final best version; this is usually caused by footnotes or floating figures inserted at points that end up near page boundaries.

The @Unpaginated option, whose value is ignored unless plain text output is in effect, produces unpaginated output when changed to Yes (see Section 3.6).

Within the @Text symbol, it is possible to have a sequence of sections:

```
preceding text
@BeginSections
@Section ... @End @Section
@Section ... @End @Section
...
@Section ... @End @Section
@EndSections
```

as described in Section 2.7. Within any section, a similar arrangement produces subsections:

```
preceding text
@BeginSubSections
@SubSection ... @End @SubSection
@SubSection ... @End @SubSection
...
@SubSection ... @End @SubSection
@EndSubSections
```

Within any subsection, there may be sub-subsections, obtained using @BeginSubSubSections, @SubSubSection, and @EndSubSubSections. There are no sub-sub-subsections.

Also within the @Text symbol only, there may be a sequence of appendices:

```
preceding text
@BeginAppendices
@Appendix ... @End @Appendix
@Appendix ... @End @Appendix
...
@Appendix ... @End @Appendix
@EndAppendices
```

These will be 'numbered' A, B, C etc. as is conventional. Within any appendix there may be a sequence of subappendices, obtained in the usual way using @BeginSubAppendices,

@SubAppendix, and @EndSubAppendices. There are sub-subappendices as well, following the same pattern, but no sub-sub-subappendices.

In addition to the @Title option, each large-scale structure symbol (@Section, @SubSection, @SubSubSection, @Appendix, @SubAppendix, and @SubSubAppendix) has a @Tag option for cross referencing (Section 2.8), an @InitialLanguage option for changing the language of that part of the document, and a @RunningTitle option which will be used in place of @Title in running headers if given. @RunningTitle is useful when the full title is rather long.

The features described in other chapters are all available within ordinary documents. Endnotes and references appear automatically at the end of the document. Figures are labelled Figure 1, Figure 2, etc., and tables are labelled Table 1, Table 2, etc.

To get a table of contents, set the @MakeContents option in the setup file to Yes, and insert the symbol @ContentsGoesHere at the point where you would like the table of contents to appear, anywhere before the first section:

```
@SysInclude { doc }
@Text @Begin
@CentredDisplay @Heading { Safety Procedures }
@Heading { Contents }
@DP
@ContentsGoesHere
@DP
...
@End @Text
```

You must supply your own heading, as well as paragraph symbols before and after. Regrettably, @ContentsGoesHere may not be placed inside a display, nor inside @FullWidth.

To get an index, set the @MakeIndex option in the setup file to Yes, and follow the instructions in Section 2.10. The index will appear automatically at the end of your document.

Within the doc setup file there is an @OrdinarySetup symbol whose options control the appearance of features specific to ordinary documents (in other words, the features described in this section). Here is a representative sample of these options, showing their default values:

```
@Use { @OrdinarySetup
  # @IndexWord { index }
  # @AppendixWord { appendix }
  # @SectionNumbers { Arabic }
  # @SectionHeadingFont { Bold }
  # @SectionGap { 2.00v }
  # @SectionInContents { Yes }
}
```

Section 4.1 explains how to make your own setup file and change its options.

The @IndexWord option determines what the index is called, if there is one. The default value, index, produces the word ‘Index’ in the current language. Any other value produces itself. The @AppendixWord option is similar; its default value is ‘Appendix’ in the current language.

@SectionNumbers determines how sections will be numbered, and may be None, Arabic, Roman, UCRoman, Alpha, or UCAlpha. The default value is Arabic for sections and also all other large-scale structure symbols except appendices, for which it is UCAlpha. This produces the appendices numbered in upper-case letters (A, B, C, etc.) that were mentioned earlier.

@SectionHeadingFont is the font used for section headings. The default value produces the bold face from the family of the initial font. A family name or size is also acceptable:

```
@SectionHeadingFont { Helvetica Base +2p }
```

makes the section heading appear in the Helvetica font, two points larger than the initial size.

@SectionGap determines how much space is left blank before each section title; the default value shown above is twice the current inter-line spacing. The special value 2b may be used to get a page break rather than a space. There are similar options for other large-scale structure symbols, which determine how much space is left before each one.

@SectionInContents determines whether or not an entry is made in the table of contents for each section; it may be Yes or No, but would always be Yes. The default value of the corresponding options for sub-subsections and sub-subappendices, however, is No.

3.2. Technical reports

To make a technical report, start off with the report setup file and the @Report symbol:

```
@SysInclude { report }
@Report
   @Title {}
   @Author {}
   @Institution {}
   @DateLine { No }
   @CoverSheet { Yes }
   @ContentsSeparate { No }
   @InitialFont { Times Base 12p }
   @InitialBreak { hyphen adjust 1.2fx }
   @InitialSpace { lout }
   @InitialLanguage { English }
   @PageOrientation { Portrait }
   @PageHeaders { Simple }
   @ColumnNumber { 1 }
   @FirstPageNumber { 1 }
   @OptimizePages { No }
   @AbstractDisplay { Yes }
   @AbstractTitle { Abstract }
   @Abstract {}
//
```

This shows all the options of @Report[1] with their default values. As usual with options, they may be given in any order, and only the ones whose values need to be changed need be given at

all. The meaning of the // symbol is beyond our scope, but disaster will ensue if it is forgotten.

The @Title option holds the title of the report. It will be printed using the clines paragraph breaking style (Section 1.9), which centres each line, so it makes sense to have multi-line titles:

```
@Report
   @Title {
The solution of real instances of
the timetabling problem
}
   ...
```

With a multi-line title, each line after the first should begin at the left margin, not indented. It doesn't matter where the first line begins, because space following an open brace is ignored.

The @Author and @Institution options hold the author's name and institution or address, and will also be printed using the clines style. If there are several authors but only one institution, list all the authors in the @Author option:

```
@Author { Tim B. Cooper and Jeffrey H. Kingston }
```

With more authors, or with more than one institution, it is best to ignore the @Institution option and place all the information within the @Author option, enclosing institution information in @I symbols. In extreme cases, a table with columns of authors might be necessary (Chapter 6).

@DateLine may be set to No, meaning no dateline, Yes, meaning print the current date, or anything else, which is taken to be a date and printed:

```
@DateLine { 4 July, 1776 }
```

A good plan is to use @DateLine { Yes } until the report is finalized.

The remaining options (except @Abstract) are setup file options (Section 4.1) that frequently need to be changed. If your changes to the overall formatting are confined to these options, you can change them here and avoid having your own setup file. If you already have your own setup file, change them in either place and omit them in the other.

If @CoverSheet is Yes, an unnumbered cover sheet will be produced containing the title, author, institution, abstract, and dateline. Otherwise they will appear on the first page. The 'cover sheet' is in reality a sequence of Intro pages (Section 4.4), numbered by default with Roman numerals on pages after the first.

In order to get a table of contents, it is necessary to use your own setup file (Section 4.1 explains how to do this) and to set the @MakeContents option within it to Yes. The table of contents will ordinarily appear beginning on the first page, but if the @ContentsSeparate option

---

[1]Version 3.13 of Lout is not completely upwardly compatible with previous versions in its handling of technical reports. The change concerns the abstract, and if you see the error message

```
symbol @Abstract unknown or misspelt
```

you probably need to convert your document. To convert an older document to Version 3.13, move any @Abstract from after the // to before it, delete any options to the @Abstract symbol, and delete any initial paragraph symbol within the abstract. You can use the @AbstractTitle option described in this section to change the title of the abstract.

of @Report is set to Yes it will appear on separate pages. This is only effective if @CoverSheet is No, since a separate cover sheet and separate pages for the table of contents would leave nothing on the first page.

@InitialFont is the font of the bulk of the report, and should contain a family, a face, and a size. The default value selects the Times family, the Base face, and the 12 point size.

@InitialBreak controls the behaviour of paragraph breaking in the bulk of the report. It should have three parts: a paragraph breaking style (adjust, ragged, etc.), an inter-line spacing (1.2fx for single spacing, 2.4fx for double spacing, and so on), and either hyphen or nohyphen for turning hyphenation on or off. It may also have nobreakfirst or nobreaklast (or both), meaning to disallow a page break after the first line of a paragraph, or before the last, respectively.

@InitialSpace determines how Lout treats white space between two objects, as described in Section 1.18. @InitialLanguage determines the language of the bulk of the report.

@PageOrientation determines the orientation of the page. Its value may be Portrait (the default), Landscape, ReversePortrait, or ReverseLandscape. See Section 4.2 for further details.

@PageHeaders determines the appearance of page headers and footers. Its value may be None, Simple, Titles, or NoTitles. Section 4.4 has the details, but just briefly, None produces no page headers, Simple produces a centred page number between hyphens on every page except the cover sheet and the first page, Titles produces full running titles as in the present document, and NoTitles is like Titles with the running titles omitted, leaving just the page numbers.

@ColumnNumber is the number of columns per page in the bulk of the report, and may be anything from 1 (the default value) to 10. However, there is nothing analogous to the @FullWidth symbol of ordinary documents. Instead, the cover sheet, title material, and all figures and tables will be printed full width, and the rest will be set in columns. There is a separate @IndexColumnNumber option in the setup file which determines the number of columns in the index (Section 2.10).

@FirstPageNumber is the page number given to the first page.

Lout ordinarily places lines onto a page until space runs out, then moves to the next page and so on. This often produces ugly empty spaces at the bottoms of pages preceding large unbreakable displays. Setting the @OptimizePages option to Yes causes Lout to examine the overall situation and try to minimize the ugliness, using the TEX optimal paragraph breaking algorithm. It takes two runs to do this, with intermediate results stored in Lout's cross reference database (Section 2.8); so deleting file lout.li will reset it, which might be wise after major changes. It is possible for the optimizer to cycle, never settling on a single final best version; this is usually caused by footnotes or floating figures inserted at points which end up near page boundaries.

Finally we have three options that control the abstract. @AbstractDisplay may be Yes or No; it determines whether the abstract is displayed (occupying the full page width except for an indent at each side like a quoted display) or inline (occupying the column width). @AbstractTitle is the title of the abstract; its default value is Abstract or its equivalent in the current language. Finally, @Abstract contains the abstract itself; it may be empty or absent, in which case there will be no abstract.

The abstract may contain footnotes in the usual way. Regrettably, each footnote in the abstract will generate one spurious 'unresolved cross reference' error message that does not go away. This slight problem might be fixed in the future.

After the compulsory // comes the report body in the form of a sequence of sections:

```
@Section
   @Title { Introduction }
@Begin
@PP
...
@End @Section
```

No @BeginSections or @EndSections symbols are needed. The general rule is that you need these bracketing symbols only when you are inside something else. Sections lie inside @Text in ordinary documents, but they don't lie inside anything else in technical reports.

A section may have subsections, between @BeginSubSections and @EndSubSections:

```
preceding text
@BeginSubSections
@SubSection ... @End @SubSection
@SubSection ... @End @SubSection
...
@SubSection ... @End @SubSection
@EndSubSections
```

Within each subsection there may be sub-subsections, each introduced by @SubSubSection, with the whole sequence bracketed by @BeginSubSubSections and @EndSubSubSections:

```
preceding text
@BeginSubSubSections
@SubSubSection ... @End @SubSubSection
@SubSubSection ... @End @SubSubSection
...
@SubSubSection ... @End @SubSubSection
@EndSubSubSections
```

There are no sub-sub-subsections.

After the sections comes an optional sequence of appendices, each introduced by @Appendix in the usual way:

```
@Appendix
   @Title { Derivation of the renewal formula }
@Begin
@PP
...
@End @Appendix
```

No @BeginAppendices or @EndAppendices symbols are needed, because (like the sections above) these appendices do not lie inside any other large-scale structure symbol. The appendices are numbered A, B, C, etc., as is conventional for them. Within each appendix there may be a sequence of subappendices, obtained with the @SubAppendix symbol and bracketed by

@BeginSubAppendices and @EndSubAppendices:

```
preceding text
@BeginSubAppendices
@SubAppendix ... @End @SubAppendix
@SubAppendix ... @End @SubAppendix
...
@SubAppendix ... @End @SubAppendix
@EndSubAppendices
```

There are sub-subappendices following the same pattern, but no sub-sub-subappendices.

The report ends with the last section or appendix; any reference list or index will be appended automatically. Although we have described how to create reports as though everything was in one large file, in practice it is much better to divide the report into multiple files, following the method given in Section 3.8.

In addition to the @Title option, each large-scale structure symbol (@Section, @SubSection, @SubSubSection, @Appendix, @SubAppendix, and @SubSubAppendix) has a @Tag option for cross referencing (Section 2.8), an @InitialLanguage option for changing the language of that part of the document, and a @RunningTitle option which will be used in place of @Title in running headers if given. @RunningTitle is useful when the full title is rather long.

The features described in other chapters are all available within technical reports. To get a table of contents, change the @MakeContents option in the setup file to Yes; the rest is automatic, and you don't need the @ContentsGoesHere symbol from ordinary documents. To get an index, again you need only change the @MakeIndex setup file option to Yes. Endnotes and references appear at the end of the report. Figures and tables are numbered 1, 2, 3, etc.

Within the report setup file there is a @ReportSetup symbol whose options control the appearance of features specific to reports (in other words, the features described in this section). Section 4.1 explains setup files and their options in general; here is a representative sample of these options, showing their default values:

```
@Use { @ReportSetup
   # @CoverSheet { Yes }
   # @DateLine { No }
   # @ReferencesBeforeAppendices { No }
   # @AbstractWord { abstract }
   # @ContentsWord { contents }
   # @SectionNumbers { Arabic }
   # @SectionHeadingFont { Bold }
   # @SectionGap { 2.00v }
   # @SectionInContents { Yes }
}
```

@CoverSheet and @DateLine are as for @Report; you can set them in either place as you prefer. @ReferencesBeforeAppendices determines whether the reference list is printed out before or after any appendices. @AbstractWord determines the value of the title of the abstract if none is given there; its default value, abstract, produces 'Abstract' in the current language.

@ContentsWord is similar; its default value produces 'Contents' in the current language. The other four options control the appearance of sections, and there are similar options for controlling the other large-scale structure symbols.

@SectionNumbers determines how sections will be numbered, and may be None, Arabic, Roman, UCRoman, Alpha, or UCAlpha. The default value is Arabic for sections, and also for all large-scale structure symbols except appendices, for which it is UCAlpha. This produces the appendices numbered in upper-case letters (A, B, C, etc.) that were mentioned earlier.

@SectionHeadingFont is the font used for section headings. The default value shown above produces the bold face from the family of the initial font. A family name and size is acceptable here as well:

```
@SectionHeadingFont { Helvetica Base +2p }
```

produces section headings in the Helvetica font, two points larger than the initial font size.

@SectionGap determines how much space is left blank before each section title; the default value shown above is twice the current inter-line spacing. The special value 2b may be used to get a page break rather than a space. There are similar options for other large-scale structure symbols, which determine how much space is left before each one. @SectionInContents determines whether or not an entry is made in the table of contents for each section; it may be Yes or No.

3.3. Books

To produce a book, start off with the book setup file and the @Book symbol:

```
@SysInclude { book }
@Book
   @Title {}
   @Author {}
   @Edition {}
   @Publisher {}
   @BeforeTitlePage {}
   @OnTitlePage {}
   @AfterTitlePage {}
   @InitialFont { Times Base 12p }
   @InitialBreak { adjust 1.2fx hyphen }
   @InitialSpace { lout }
   @InitialLanguage { English }
   @PageOrientation { Portrait }
   @PageHeaders { Titles }
   @ColumnNumber { 1 }
   @FirstPageNumber { 1 }
   @IntroFirstPageNumber { 1 }
   @OptimizePages { No }
//
```

This shows all the options of @Book with their default values. As usual, these options may be given in any order, and only those to be changed need be given at all. The meaning of the // symbol after the last option is beyond our scope, but total disaster will ensue if it is forgotten.

The @Title, @Author, and @Edition options will appear on the title page, in the clines paragraph breaking style which centres each line (Section 1.9). The @Publisher option will appear at the foot of the title page.

The @BeforeTitlePage option will come out on the page (or pages) preceding the title page. This is where publishers traditionally advertise other books of a similar kind, perhaps from a series.

If @OnTitlePage is given it will replace the title page that usually appears, superseding the @Title, @Author, @Edition, and @Publisher options in the process.

The @AfterTitlePage option will come out on the page (or pages) following the title page. This is where publishers traditionally put copyright notices, information about production, and cataloguing-in-publication data. If this option is empty or omitted, there will be no such pages.

The remaining options are a selection of setup file options (Section 4.1) that frequently need to be changed. If your changes to the overall formatting are confined to these options, you can change them here and avoid having your own setup file. If you already have your own setup file, change them in either place and omit them in the other.

@InitialFont is the font of the bulk of the book, and should contain a family, a face, and a size. The default value selects the Times family, the Base face, and the 12 point size.

@InitialBreak controls the behaviour of paragraph breaking in the bulk of the book. It should have three parts: a paragraph breaking style (adjust, ragged, etc.), an inter-line spacing (1.2fx for single spacing, 2.4fx for double spacing, and so on), and either hyphen or nohyphen for turning hyphenation on or off. It may also have nobreakfirst or nobreaklast (or both), meaning to disallow a page break after the first line of a paragraph, or before the last, respectively.

@InitialSpace determines how Lout treats white space between two objects, as described in Section 1.18. @InitialLanguage determines the language of the bulk of the book.

@PageOrientation determines the orientation of the page. Its value may be Portrait (the default), Landscape, ReversePortrait, or ReverseLandscape. See Section 4.2 for further details.

@PageHeaders determines the appearance of page headers and footers throughout the book. Its value may be None, Simple, Titles, or NoTitles. Section 4.4 has the details, but just briefly, None and Simple are not really suitable for books, Titles produces full running titles as in the present document, and NoTitles is like Titles with the running titles omitted, leaving just the page numbers.

@ColumnNumber is the number of columns per page in the bulk of the book, and may be anything from 1 (the default value) to 10. Irrespective of its value, all prefatory material, all chapter and appendix headings, and all figures and tables will be printed full width. There is a separate @IndexColumnNumber option in the setup file which determines the number of columns in the index (Section 2.10).

@FirstPageNumber is the page number to be given to the first non-introductory page. @IntroFirstPageNumber is the page number of the first introductory page; it will usually appear in Roman but must be given in Arabic.

Lout ordinarily places lines onto a page until space runs out, then moves to the next page and so on. This often produces ugly empty spaces at the bottoms of pages preceding large unbreakable displays. Setting the @OptimizePages option to Yes causes Lout to examine the overall situation and try to minimize the ugliness, using the TEX optimal paragraph breaking algorithm. It takes two runs to do this, with intermediate results stored in Lout's cross reference database (Section 2.8); so deleting file lout.li will reset it, which might be wise after major changes. It is possible for the optimizer to cycle, never settling on a single final best version; this is usually caused by footnotes or floating figures inserted at points which end up near page boundaries.

After the compulsory // comes an optional preface:

```
@Preface
   @Title { About this book }
@Begin
@PP
...
@End @Preface
```

Since the title of most prefaces is simply Preface, that is the default value in English of the @Title option. After the preface there will automatically appear a table of contents listing the introduction, chapters, sections, subsections, appendices, sub-appendices, bibliography, and index as appropriate.

The pages up to this point will be numbered in lower case Roman numerals; subsequent pages will be numbered in Arabic starting from the @FirstPageNumber option of @Book. There is a setup file option for changing this to a single numbering sequence (see below).

Next comes an optional introduction, exactly like the preface except that its name is @Introduction and the default title in English is Introduction:

```
@Introduction
@Begin
@PP
...
@End @Introduction
```

After that comes a sequence of chapters in the usual style:

```
@Chapter
   @Title { Australian Native Plants }
@Begin
@PP
...
@End @Chapter
```

No @BeginChapters or @EndChapters symbols are needed, because these chapters are not inside any other large-scale structure symbol. Within a chapter, there may be a sequence of sections, each introduced by @Section in the usual way, all bracketed by @BeginSections and @EndSections:

```
preceding text
@BeginSections
@Section ... @End @Section
@Section ... @End @Section
...
@Section ... @End @Section
@EndSections
```

Within each section there may be subsections, each introduced by @SubSection, and the sequence as a whole bracketed by @BeginSubSections and @EndSubSections:

```
preceding text
@BeginSubSections
@SubSection ... @End @SubSection
@SubSection ... @End @SubSection
...
@SubSection ... @End @SubSection
@EndSubSections
```

The subsections may contain sub-subsections in the same way. There are no sub-sub-sub-sections.

After the chapters comes an optional sequence of appendices. Each is introduced by @Appendix in the usual way:

```
@Appendix
   @Title { Climatic Regions of Australia }
@Begin
@PP
...
@End @Appendix
```

No @BeginAppendices or @EndAppendices symbols are needed, because (like chapters) these appendices do not lie inside any other large-scale structure symbol. The appendices are numbered A, B, C, etc., as is conventional for them. Within each appendix there may be a sequence of subappendices, obtained with the @SubAppendix symbol and bracketed by @BeginSubAppendices and @EndSubAppendices:

```
preceding text
@BeginSubAppendices
@SubAppendix ... @End @SubAppendix
@SubAppendix ... @End @SubAppendix
...
@SubAppendix ... @End @SubAppendix
@EndSubAppendices
```

There are sub-subappendices following the same pattern, but no sub-sub-subappendices.

The book ends with the last chapter or appendix; any reference list or index will be appended automatically. Although we have described how to create books as though everything

was in one large file, in practice it is much better to divide the book into multiple files, following the method given in Section 3.8.

In addition to the @Title option, each large-scale structure symbol (i.e. @Preface, @Introduction, @Chapter, @Section, @SubSection, @SubSubSection, @Appendix, @SubAppendix, and @SubSubAppendix) has a @Tag option for cross referencing (Section 2.8), an @InitialLanguage option for changing the language of that part of the document, and a @RunningTitle option which will be used in place of @Title in running headers if given. This last is useful when the full title is rather long.

The @Chapter symbol has three additional options for dividing the book into parts:

```
@Chapter
   @PartNumber { Part A }
   @PartTitle { The Ancient World }
   @PartText { ... }
```

Any chapter with a non-empty @PartTitle option will become the first chapter of a part. It will be preceded by two pages containing the part number, part title, and part text, and there will also be an entry made in the table of contents. @PartNumber and @PartText may be omitted if desired. Parts are *not* numbered automatically: you have to supply your own numbers or letters as in the example above.

The features described in other chapters are all available within books. A table of contents and index will appear automatically, and you will need to change the setup file to avoid them. Endnotes will appear at the end of the enclosing preface, introduction, chapter, or appendix. The numbering of figures and tables includes a chapter or appendix number: the first figure of Appendix C will be Figure C.1, and so on. Figures and tables within the preface or introduction are numbered 1, 2, 3, etc. A figure or table will never appear on the same page as the beginning of a chapter or appendix. References work as described in Chapter 5. As explained there, it is possible to have a list of references at the end of each chapter as well as at the end of the book.

Within the book setup file there is a @BookSetup symbol whose options control the appearance of features specific to books (in other words, the features described in this section). Here is a representative sample of these options, showing their default values:

```
@Use { @BookSetup
   # @TitlePageFont { Helvetica Base }
   # @SeparateIntroNumbering { Yes }
   # @PrefaceAfterContents { No }
   # @ReferencesBeforeAppendices { No }
   # @ChapterStartPages { Any }
   # @ChapterWord { chapter }
   # @ChapterNumbers { Arabic }
   # @ChapterHeadingFont { Bold 2.00f }
   # @ChapterHeadingBreak { ragged 1.2fx nohyphen }
   # @ChapterHeadingFormat { number @DotSep title }
   # @AboveChapterGap { 3.00f }
   # @ChapterInContents { Yes }
}
```

Section 4.1 explains how to make your own setup file and change its options. @TitlePageFont is the font used on the title page of the book, not including a size. @ChapterStartPages determines what kinds of pages chapters and other major components of the book may begin on, and may be Any, Odd, or Even, meaning any page, odd-numbered pages only, or even-numbered pages only. @SeparateIntroNumbering determines whether the introductory part of the book is to have a separate numbering sequence or not. @ReferencesBeforeAppendices determines whether any final list of references appears before or after any appendices. @ChapterWord determines the word used in chapter titles; its default value, chapter, produces 'Chapter' in the current language. The other six options control the appearance of chapters, and there are similar options for controlling the other large-scale structure symbols.

@ChapterNumbers determines how chapters will be numbered, and may be None, Arabic, Roman, UCRoman, Alpha, or UCAlpha. The default value is Arabic for chapters and also for all large-scale structure symbols except appendices, for which it is UCAlpha. This produces the appendices numbered in upper-case letters (A, B, C, etc.) that were mentioned earlier.

@ChapterHeadingFont is the font used for chapter headings. The default value shown above produces the bold face from the family of the initial font, at twice the initial size. A family name is acceptable here as well. @ChapterHeadingBreak is the break style for chapter headings.

@ChapterHeadingFormat allows you to change the format of the heading. The symbol number within it will be replaced by the number of the chapter (actually including the word Chapter as well in the current language, e.g. Chapter 12); the symbol title within it will be replaced by the title. So you could write, say,

```
@ChapterHeadingFormat { @Box paint { lightgrey } { number @DP title } }
```

to get the title below the number, both enclosed in a box. The default value uses the @DotSep symbol from Section 4.4 to produce the number and title separated by a dot and two spaces, roughly the same as

```
@ChapterHeadingFormat { number. title }
```

except when there is no number. For consistency this option is applied to other major headings as well: in the preface, introduction, table of contents, appendices, reference list, and index. In all these other cases, number is an empty object, except for appendices, when it contains Appendix A or whatever.

There is a @PartHeadingFormat option for determining the format of part headings. It works in the same way as @ChapterHeadingFormat, with number and title symbols standing for the @PartNumber and @PartTitle options of the relevant @Chapter symbol. The default value is

```
@PartHeadingFormat { @CD number @DP @CD title }
```

which centres the number and title. The default paragraph breaking style is clines, but you may place a @Break symbol within @PartHeadingFormat to change this.

The example of boxed titles for chapters given above suffers from two practical deficiencies. First, the box won't extend right across the page, and second, when there is no number we don't want the @DP either. Here is a value for @ChapterHeadingFormat that solves both of these

problems and looks good in practice:

```
@ChapterHeadingFormat {
   number @Case {
      {} @Yield @Box paint { lightgrey } @HExpand { title }
      else @Yield @Box paint { lightgrey } @HExpand { number @DP title }
   }
}
```

This uses the @Case symbol (described in the Expert's Guide [5]) to distinguish between the cases where number is empty and non-empty; and it uses the @HExpand symbol to expand the horizontal space occupied by the heading to the maximum possible, so that when the box is drawn around it it will occupy the full page width. The format object can be as complicated as you like, and there is no need to squeeze it all onto one line; as always in Lout, the end of a line is the same as one space.

Every chapter and appendix begins on a new page. @AboveChapterGap determines how much space is left blank above the chapter title; the default value is three times the initial font size. There are similar options for other large-scale structure symbols, which determine how much space is left before each one.

@ChapterInContents determines whether or not an entry is made in the table of contents for each chapter; it may be Yes or No, but would always be Yes. The default value of the corresponding options for sub-subsections and sub-subappendices, however, is No.

3.4. Overhead transparencies

To produce overhead transparencies (hereafter called overheads), start off with the slides setup file and the @OverheadTransparencies symbol:

```
@SysInclude { slides }
@OverheadTransparencies
   @Title {}
   @RunningTitle {}
   @Author {}
   @Institution {}
   @DateLine { No }
   @InitialFont { Times Base 20p }
   @InitialBreak { ragged 1.2fx nohyphen }
   @InitialSpace { lout }
   @InitialLanguage { English }
   @PageOrientation { Portrait }
   @PageHeaders { Titles }
   @FirstPageNumber { 1 }
   @FirstOverheadNumber { 1 }
   @FirstLectureNumber { 1 }
   @OptimizePages { No }
//
```

This shows all the options of @OverheadTransparencies with their default values. As usual with options, they may be given in any order, and only the ones whose values need to be changed need be given at all. The meaning of the // symbol after the last option is beyond our scope, but disaster will ensue if it is forgotten.

If @Title is not empty, an initial overhead will be produced containing the @Title, @Author, @Institution, and @DateLine options. @DateLine may be set to No, meaning no dateline, Yes, meaning print the current date, or anything else, which is taken to be a date and printed.

Each overhead has a running header printed in small type at the top left. The @RunningTitle option goes into this header, or, if there is no @RunningTitle option, @Title is used instead.

The remaining options are a selection of setup file options (Section 4.1) that frequently need to be changed. If your changes to the overall formatting are confined to these options, you can change them here and avoid having your own setup file. If you already have your own setup file, change them in either place and omit them in the other.

@InitialFont is the font in which the overheads will be set, and should contain a family, a face, and a size. Experience shows that 20 points is a good font size for overheads, so that is the default size.

@InitialBreak controls the behaviour of paragraph breaking in the overheads. It should have three parts: a paragraph breaking style (adjust, ragged, etc.), an inter-line spacing (1.2fx for single spacing, 2.4fx for double spacing, and so on), and either hyphen or nohyphen for turning hyphenation on or off. Adjusted lines and hyphenated words are difficult to read from overheads, so the default is not to have them.

@InitialSpace determines how Lout treats white space between two objects, as described in Section 1.18. @InitialLanguage determines the language of the overheads.

@PageOrientation determines the orientation of the page. Its value may be Portrait (the default), Landscape, ReversePortrait, or ReverseLandscape. See Section 4.2 for further details.

@PageHeaders determines the appearance of page headers and footers. Its value may be None, Simple, Titles, or NoTitles. Section 4.4 has the details, but just briefly, None produces no page headers, Simple produces page numbers only, Titles produces full running titles, and NoTitles is similar to Simple in this context.

@FirstPageNumber is the number given to the first page, @FirstOverheadNumber is the number given to the first overhead, and @FirstLectureNumber is the number given to the first lecture, of which more below.

Lout ordinarily places lines onto a page until space runs out, then moves to the next page and so on. This often produces ugly empty spaces at the bottoms of pages preceding large unbreakable displays. Setting the @OptimizePages option to Yes causes Lout to examine the overall situation and try to minimize the ugliness, using the TEX optimal paragraph breaking algorithm. It takes two runs to do this, with intermediate results stored in Lout's cross reference database (Section 2.8); so deleting file lout.li will reset it, which might be wise after major changes. It is possible for the optimizer to cycle, never settling on a single final best version; this is usually caused by footnotes or floating figures inserted at points which end up near page boundaries.

After the compulsory // come the overheads themselves. There are two alternatives here: you may either choose to make a simple series of overheads, corresponding to a single lecture, or you may choose to make a series of series of overheads, corresponding to a series of lectures.

To make a simple series of overheads, use this arrangement:

```
@SysInclude { slides }
@OverheadTransparencies
   ...
//
@Overhead ... @End @Overhead
@Overhead ... @End @Overhead
...
@Overhead ... @End @Overhead
```

@Overhead is a large-scale structure symbol, similar to @Section, with the usual options:

```
@Overhead
   @Title { Trends in investment since 1980 }
   @RunningTitle { Investment }
   @Tag { investment }
   @InitialLanguage { English }
@Begin
...
@End @Overhead
```

If @Title is given it will appear as a centred, bold display at the beginning of the overhead. As usual, these options may be given in any order or omitted altogether.

The body of the overhead is quite arbitrary. Typically one tends to use lists and displays more than paragraphs, but all the usual features are available. Each overhead begins on a fresh page, but it may occupy more than one page.

Lout does not provide any special support for overlays. A good way to make them is to first produce one overhead containing all the layers simultaneously. Once this is correct, enclose the entire body of the overhead in white @Colour, make one copy of the text of the overhead for each layer, separating the copies with @NP (new page) symbols, and, in each copy, enclose the parts that are to appear in that layer in black @Colour (or any other colour). This works because white @Colour makes an object invisible without altering its size.

We turn now to the second major alternative, which is to make a series of lectures, each of which is a series of overheads. Use this arrangement:

```
@SysInclude { slides }
@OverheadTransparencies
   ...
//
@Lecture ... @End @Lecture
@Lecture ... @End @Lecture
...
@Lecture ... @End @Lecture
```

@Lecture is a large-scale structure symbol, again with the usual options:

```
@Lecture
   @Title { Macro-Economic Policies for the Nineties }
   @RunningTitle { Macro-economic policies }
   @Tag { macro-economics }
   @InitialLanguage { English }
@Begin
...
@End @Lecture
```

If @Title is non-empty the series of overheads will begin with an overhead containing the title alone, centred on the page using the clines paragraph breaking style. This means that it makes sense to have a multi-line title.

Within the body of @Lecture, place a series of overheads bracketed by @BeginOverheads and @EndOverheads:

```
@BeginOverheads
@Overhead ... @End @Overhead
@Overhead ... @End @Overhead
...
@Overhead ... @End @Overhead
@EndOverheads
```

The @Overhead symbol is exactly as described earlier.

The features described in other chapters are available with overheads. Endnotes and references appear automatically at the end of the overheads. You can have a table of contents, by setting the @MakeContents option of the setup file to Yes. It will appear automatically after any title overhead. However, it is not possible to have an index, and it is not possible to have multiple columns.

Within the slides setup file there is an @OverheadSetup symbol whose options control the appearance of features specific to overheads (in other words, the features described in this section). Here are all these options and their default values:

```
@Use { @OverheadSetup
  # @DateLine { No }
  # @FirstOverheadNumber { 1 }
  # @FirstLectureNumber { 1 }
  # @ContentsWord { contents }
  # @LectureNumbers { Arabic }
  # @OverheadNumbers { Arabic }
  # @TitlePageFont { Helvetica Base }
  # @LectureHeadingFont { Bold 1.20f }
  # @OverheadHeadingFont { Bold }
  # @LectureInContents { Yes }
  # @OverheadInContents { No }
  # @ReferencesInContents { Yes }
}
```

For general information about setup files and their options, consult Section 4.1. The first four options are as for @OverheadTransparencies as described above. ContentsWord determines table of contents heading; its default value, contents, produces 'Contents' in the current language. @LectureNumbers and @OverheadNumbers determine the style of numbering of lectures and overheads, and may be None, Arabic, Roman, UCRoman, Alpha, or UCAlpha as usual. Next come options for controlling the font used for the overall title page, the title page of each lecture, and the heading of one overhead, and finally three options which determine which entries are made in the table of contents, if there is one.

Other setup file options exist which permit you to have a box drawn around each overhead, and to change the page size, margins, and orientation. These are described in Chapter 4.

Section 4.4 describes the setup file options that control the appearance of page headers and footers. With overheads, the values given to the @MajorTitle, @MinorTitle, @MajorNum, and @MinorNum symbols within those options are as follows. If @Lecture is being used:

@MajorTitle	The @RunningTitle option of @OverheadTransparencies, or its @Title option if @RunningTitle is absent;
@MinorTitle	The @RunningTitle option of the current @Lecture, or else its @Title option if @RunningTitle is absent;
@MajorNum	The number of the current @Lecture;
@MinorNum	A two-part number, for example 5.2, containing the number of the current @Lecture and the number within that lecture of the current overhead.

If @Lecture is not being used:

@MajorTitle	The @RunningTitle option of @OverheadTransparencies, or its @Title option if @RunningTitle is absent;
@MinorTitle	Empty;
@MajorNum	Empty;
@MinorNum	The number of the current overhead.

The first page occupied by any overhead is a Start page; subsequent pages are NonStart pages. There are no Intro pages.

3.5. Stand-alone illustrations

This section describes how to use Lout to produce an illustration for inclusion in some other document, which may itself be a Lout document but need not be. The opposite process, the inclusion of an illustration in a Lout document, is the subject of Section 8.5.

Suppose you want to produce the following logo for inclusion in some other document:

This is just an object, and it is not hard to make it using Lout's graphics features:

```
45d @Rotate @CurveBox { ARMY @LP 180d @Rotate ARMY }
```

The problem is that objects ordinarily come out on pages with margins, page numbers, and so forth, which we don't want here. The solution is to use the illustration document type, whose setup file, curiously enough, is called picture:

```
@SysInclude { picture }
@Illustration {
   45d @Rotate @CurveBox { ARMY @LP 180d @Rotate ARMY }
}
```

After the usual @SysInclude line comes one @Illustration symbol. Following it is an arbitrary object which becomes the entire result, with no pages and no margins, ready for inclusion in some other document as an illustration.

The @Illustration symbol has options for setting the initial font, paragraph breaking style, colour, and language. Here they are with their default values:

```
@Illustration
   @InitialFont { Times Base 12p }
   @InitialBreak { adjust 1.2fx hyphen }
   @InitialSpace { lout }
   @InitialLanguage { English }
   @InitialColour { black }
{
   ...
}
```

You can specify any colour from the list in Section 8.1, for example blue, and then your illustration will have that colour wherever it is included.

Because there are no pages, the width and height of the result are indeterminate, depending on how large the object turns out to be. This makes things very awkward for filled paragraphs and centring, which depend on knowing how much space is available to be occupied. So you should either avoid filled paragraphs and all displays and lists altogether in illustrations, or else enclose your object in a @Wide symbol:

```
@Illustration 5c @Wide {
   ...
}
```

to make clear how wide you want your illustration to be.

The technical name for a file containing a stand-alone illustration is 'encapsulated PostScript file' or 'EPS file' for short. To get Lout to produce an encapsulated PostScript file instead of an ordinary PostScript file, you have to use the -EPS Unix command line flag. For example, suppose the Lout file containing our example illustration is called army; then the appropriate Unix command for formatting it is

```
lout -EPS army > army.eps
```

An EPS file is supposed to contain only one ‘page’, so Lout will refuse to generate any second or subsequent pages when the -EPS flag is given. There is also a minor difference in format between ordinary and encapsulated PostScript files, which is why the -EPS flag is needed at all.

3.6. Plain text documents

Occasionally you may need to produce an output file containing plain text rather than PostScript, for example for an online manual entry or to send as electronic mail. Any document that can be produced by Lout in PostScript can be produced in plain text as well, by adding a -p flag to the Unix command line:

```
lout -p simple
```

No other changes are required. Here we are sending the output directly to the screen, but it can be redirected to a file, or piped through the more command for viewing one page at a time, etc.

Of course, plain text is an extremely limited medium of communication compared with PostScript, and this forces Lout to make some rather drastic compromises:

- Symbols like @Bullet, which stand for unusual characters, produce printable characters which approximate the PostScript ones. For example, @Bullet produces o. However, the @Char and @Sym symbols often produce unprintable characters, and are best avoided;
- All font and size changes are ignored, since plain text has only one font and size. Every character is taken to be $1/10$ inch wide and $1/6$ inch high;
- No underlines are printed;
- No margin notes are printed;
- Scaled objects are not printed unless the scale factor happens to be 1;
- Rotated objects are not printed unless the angle happens to be zero degrees. This means that page orientations (Section 4.2) other than Portrait do not work;
- Ruled lines are not printed, and paint and colour options are ignored. This spoils the graphics and graphs of Chapters 8, 9, and 10.

Despite the problems, many things work surprisingly well. Tables, for example, look very good. It does no harm to try things and see if they work out.

The worst problem with plain text is that characters cannot be placed at arbitrary points on the page. A superscript, for example, is impossible to place correctly, so Lout uses a different layout for footnote labels (and makes a mess of equations, which are best avoided). Because of this problem it’s best to make all horizontal lengths multiples of $1/10$ inch (conveniently expressed as 1s), and all vertical lengths multiples of $1/6$ inch (conveniently expressed as 1f). To help you do this, the setup files contain many entries that look like this example:

```
# @InitialBreak { {adjust 1.2fx hyphen} @OrIfPlain {ragged 1fx nohyphen} }
```

The meaning is that the value of @InitialBreak will be adjust 1.2fx hyphen usually, but will switch to ragged 1fx nohyphen, which is better suited to plain text, if the -p command line flag is used. These setup file values allow you to switch from PostScript to plain text and back again without changing anything at all except the -p command line flag.

If you use lout -P instead of lout -p, the plain text output will contain a form-feed character (control-L) after each page except the last. This character causes most printing devices to start a new page, which is very useful when your page height is not exactly right.

The @Document symbol (Section 3.1) has an @Unpaginated option which, when set to Yes, causes the plain text output to appear unpaginated, that is, in one long continous stream with no page breaks. Its value is ignored if plain text output is not in effect, so it can be safely set to Yes in documents intended for formatting both ways. The usual margins apply; footnotes appear at the end; figures and tables do not work. Lout stupidly reads the entire document before producing any output when this option is used, so if the document is long you might run out of memory.

3.7. PDF (Adobe Portable Document Format) documents

Lout offers PDF (Adobe Portable Document Format) output as an alternative to PostScript. Any document that can be produced by Lout in PostScript can be produced in PDF as well, by adding a -Z flag to the Unix command line:

```
lout -Z simple > simple.pdf
```

No other changes are required.

The PDF output is superior to PostScript in providing links: when viewed with a PDF viewer, entries in tables of contents and indexes can be clicked on and this transports the viewer to the part of the document referenced by the link. (Recent versions of PostScript support this feature too, but Lout's PostScript doesn't.) However, the PDF output produced by Lout is inferior at graphics: the advanced features of the @Diag and @Graph packages do not produce any output. One can still format documents that contain them, but the results are disappointing.

3.8. Organizing large documents

It is not a good plan to store a large document in a single large file. It takes too long to find things in it, and if some catastrophe occurs, you lose the lot. Lout encourages you to break documents into pieces by its willingness to read a sequence of files (lout file1 file2 ...). For large documents, the following plan is recommended.

Suppose you are making a book whose third chapter contains sections on banksias, grevilleas, acacias, and eucalypts. Place each section, from @Section to @End @Section, in a separate file, making four files called, say, banksias, grevilleas, acacias, and eucalypts. Then make a single file for the chapter as a whole whose contents are as follows:

```
@Chapter
   @Title { Australian Native Plants }
@Begin
Australian native plants provide a distinctive identity to the
garden.  Although less colourful than their European alternatives,
some banksias and grevilleas do flower strongly, and of course the
acacias (wattles) are unsurpassable in late winter.
@BeginSections
@Include { banksias }
@Include { grevilleas }
@Include { acacias }
@Include { eucalypts }
@EndSections
@End @Chapter
```

The @Include symbol causes Lout to read the file whose name follows it between braces, just as though the contents of that file had been included at that point.

With this arrangement you can easily rearrange the order of the sections: just swap their @Include lines. You should be using Lout's automatic cross referencing features (Section 2.8), so you don't have to worry about keeping cross references up to date. You can also temporarily delete a section by placing a # character at the start of its line:

```
# @Include { acacias }
```

This works because # is the *comment character*: Lout will ignore this character (unless enclosed in double quotes) and everything following it up to the end of the line. You can even temporarily delete every section except the one you are working on at the moment, using these comments.

Suppose now that this chapter file is called natives, and you have others called preface, flowers, etc. Then you can make one file (call it garden) for the whole book like this:

```
@SysInclude { book }
@Book
   @Title { The Australian Garden }
   @Author { Martha S. Vineyard }
//
@Include { preface }
@Include { flowers }
@Include { shrubs }
@Include { natives }
@Include { trees }
```

You can play the same tricks here: swap chapters around, or temporarily delete one or more with a #. When a chapter is finished you can temporarily delete it to save formatting time and paper, and bring it back at the end. To format the book, use lout garden > out.ps in Unix. Lout will read each @Include file as it comes to it, and if it finds an @Include of a section while reading a chapter file, it will read the section too.

If the order of your chapters is fairly stable, it might be advantageous to use the @Bypass-

Number option of @Chapter (described in Appendix B) to fix the numbers of all your chapters, so that you get correct chapter numbers even when formatting one chapter at a time.

If you decide to store chapters in separate Unix directories, make sure that any / characters in the file names are enclosed in double quotes:

```
@Include { "natives.dir/acacias" }
```

Be careful not to give the directory the same name as your chapter file. You might also find it useful to construct your book *top-down*, as computer scientists call it, laying out all the chapters and sections as empty skeletons and filling their contents in later.

Chapter 4. Changing the Overall Format

The symbols of Lout make many decisions behind the scenes. Even the humble @PP symbol has to decide how much vertical space to leave, and how far to indent the first line of the paragraph. How to change these decisions is the subject of this chapter.

4.1. Setup files

As mentioned briefly in Section 1.1, each Lout document begins with an instruction to include (i.e. to read) a *setup file*:

```
@SysInclude { doc }
```

The setup file's name in this example is doc, and the Sys in @SysInclude means that doc is stored in the *Lout system include directory*, which is where all the standard setup files are kept. Each document type (Chapter 3) has its own setup file, and each specialized package (for equations, tables, and so on) has a setup file too.

To change the overall format of a document, you need to create your own setup file by copying and modifying one of the standard ones. We will assume that you are making an ordinary document, with the doc setup file, but a similar procedure works for any setup file.

You first need to find out the name of the Lout system include directory, by typing

```
lout -V
```

in Unix. This causes Lout to print out various facts about itself. Then, supposing that this tells you that the Lout system include directory is /usr/lout/include, type the Unix command

```
cp /usr/lout/include/doc mydoc
```

to place a copy of the doc setup file in your directory, renaming it mydoc. Since doc is read-only, you may also need to change the mode of mydoc to be writable (by chmod +w mydoc in Unix). Now replace

```
@SysInclude { doc }
```

at the beginning of your document by

```
@Include { mydoc }
```

and Lout will read mydoc as the setup file instead of doc. Since the two files are at present identical, this has changed nothing so far; but now any changes you make to mydoc will affect your document. Notice the use of @Include rather than @SysInclude; @Include will search your current directory for mydoc, whereas @SysInclude searches only the system directory.

The remainder of this section is a tour through doc, explaining the various parts and how to

modify them. The first lines that actually do anything are these:

```
@SysInclude { fontdefs }
@SysInclude { langdefs }
@SysInclude { bsf }
@SysInclude { dsf }
@SysInclude { docf }
```

We already know that @SysInclude causes Lout to read a file from the Lout system include directory. Files fontdefs and langdefs tell Lout what fonts and languages there are. Files bsf and dsf contain the definitions of the BasicSetup and DocumentSetup packages, in which all the symbols of the first two chapters of this guide are defined. File docf contains extra definitions specific to ordinary documents (as distinct from technical reports, books, or the other document types of Chapter 3). So this line will be different in the setup files for those other types.

The next line is

```
@Include { mydefs }
```

This searches your current directory for a file called mydefs, which (as Section 2.12 explains) is intended to hold your own personal set of definitions of new symbols. It does no harm if there is no mydefs file in your current directory, because @Include then searches the Lout system include directory for it, and there is an empty mydefs file there. When using your own setup file, you might prefer to delete @Include { mydefs } and put your definitions in its place, so that you have one file of setup material rather than two.

Next we come to the BasicSetup @Use clause. It looks like this:

```
@Use { @BasicSetup
  # @InitialFont { Times Base 12p }
  # @InitialBreak { {adjust 1.20fx hyphen} @OrIfPlain {ragged 1fx nohyphen} }
  # @InitialSpace { lout }
  # @InitialLanguage { English }
  # @InitialColour { black }
  # @OptimizePages { No }
  # @HeadingFont { Bold }
  # @ParaGap { 1.3vx @OrIfPlain 1f }
  # @ParaIndent { 2.00f @OrIfPlain 5s }
}
```

@BasicSetup is a symbol, and @InitialFont, @InitialBreak, etc. are its options. There are more options than we've shown; the display above just shows the first few. You change the overall format of your document by changing these options.

As it stands, the options are all hidden within comments, so the default values (shown within braces) are in force. To change an option, delete the # and change the value between braces. For example, to set the document in Helvetica 10 point font, change the @InitialFont line to

```
@InitialFont { Helvetica Base 10p }
```

We won't go through all the options now, since they are the subject of following sections.

The @OrIfPlain symbol that appears within some setup file options is used to set the value of the option differently when plain text output (Section 3.6) is being produced. For example, the default value of @InitialBreak is usually adjust 1.20fx hyphen, but when plain text is being produced it switches to ragged 1fx nohyphen. When changing such options you can leave the @OrIfPlain symbol there and change one or both of the alternative values as you wish.

Next comes a similar @Use clause, for the DocumentSetup package:

```
@Use { @DocumentSetup
  # @PageType { A4 @OrIfPlain Other }
  # @PageWidth { 80s }
  # @PageHeight { 66f }
  # @PageOrientation { Portrait }
  # @PageBackground {}
  # @TopMargin { 2.5c @OrIfPlain 6f }
}
```

This one has many options, starting with options for page layout as shown, then going on to figures and tables, tables of contents, etc.

The standard setup files are all much the same up to this point; the main variation is that in some files, some options are already set. The slides setup file, for example, contains

```
@InitialFont { Times Base 20p }
```

so that overhead transparencies will have a large font size. However, now comes a third @Use clause whose symbol and options depend on the document type. For ordinary documents (i.e. in the doc setup file) this clause is

```
@Use { @OrdinarySetup
  # @IndexWord { index }
  # @AppendixWord { appendix }
  # @SectionNumbers { Arabic }
  # @AppendixNumbers { UCAlpha }
  # @SectionHeadingFont { Bold }
}
```

Once again this is just some of the options. In the slides setup file for overhead transparencies, we find this:

```
@Use { @OverheadSetup
  # @DateLine { No }
  # @ContentsWord { contents }
  # @FirstOverheadNumber { 1 }
  # @OverheadNumbers { Arabic }
  # @TitlePageFont { Helvetica Base 1.5f }
  # @OverheadHeadingFont { Bold }
  # @OverheadInContents { No }
}
```

In general this third @Use clause assigns values to options specific to the document type we are using, whereas the first and second @Use clauses assign values to options that are relevant to many or all document types.

The setup file ends with a comment identifying a spot where database declarations may be put, and one such declaration, for reference printing styles.

The setup files used with other packages, such as C and C++ program printing, diagrams, and graphs, are similar to the doc setup file we have just gone through. They contain a @SysInclude line analogous to @SysInclude { dsf } for reading the package's definition, followed by a @Use clause for setting the package's options. The same procedure is followed for changing these options. For example, to change the options of the diag package, copy file diag from the Lout system include directory to your directory, replace the

```
@SysInclude { diag }
```

line at the top of your document by @Include { mydiag }, then edit mydiag and change the options as you wish.

If you are using several packages and you would like a single setup file, that is quite easy to arrange. For example, suppose you have

```
@Include { mydoc }
@Include { mydiag }
@Include { mycprint }
```

To create a single setup file, just concatenate these three files into one file (call it mysetup, say), and replace the three lines by

```
@Include { mysetup }
```

As explained earlier, you can even replace the @Include { mydefs } line within the setup file by the actual definitions, giving just one file of setup material for the entire document.

4.2. Page size and page orientation

This section explains how to use the setup file options that determine page size and page orientation. Here they are with their default values:

```
@PageType { A4 }
@PageWidth {}
@PageHeight {}
@PageOrientation { Portrait }
```

The usual way to determine the page size is to set the @PageType option to the name of the paper you use:

	width in points	*height in points*
@PageType { Letter }	612p	792p
@PageType { Tabloid }	792p	1224p
@PageType { Ledger }	1224p	792p
@PageType { Legal }	612p	1008p
@PageType { Statement }	396p	612p
@PageType { Executive }	540p	720p
@PageType { A3 }	842p	1190p
@PageType { A4 }	595p	842p
@PageType { A5 }	420p	595p
@PageType { B4 }	729p	1032p
@PageType { B5 }	516p	729p
@PageType { Folio }	612p	936p
@PageType { Quarto }	610p	780p
@PageType { 10x14 }	720p	1008p

This will automatically assign the widths and heights shown above to the @PageWidth and @PageHeight options, so you don't have to worry about those options. If your paper size is not on this list, set @PageType to Other and supply your own width and height:

```
@PageType { Other }
@PageWidth { 12.0c }
@PageHeight { 18.0c }
```

The width and height may each be any length (Section 1.2), and do not have to be in points.

The basic page orientations are *portrait* and *landscape:*

```
@PageOrientation { Portrait }
```

```
@PageOrientation { Landscape }
```

When changing to Landscape, do not change the page type, page width, or page height, and do not change the way you feed your paper into the printer. Lout knows what to do.

Two other orientations are provided which are 180° rotations of the basic ones:

```
@PageOrientation { ReversePortrait }
```

```
@PageOrientation { ReverseLandscape }
```



ReverseLandscape might be useful when post-processing the PostScript output to print two landscape pages per sheet. The @PageOrientation symbol is available at the start of a document, as well as in the setup file, like @InitialFont and @PageHeaders.

4.3. Page margins, page boxes, and page backgrounds

There are six options for setting the top and bottom margins on each page, and the left and right margins on odd and even pages. Here they are with their default values:

```
@TopMargin { 2.50c }
@FootMargin { 2.50c }
@OddLeftMargin { 2.50c }
@OddRightMargin { 2.50c }
@EvenLeftMargin { 2.50c }
@EvenRightMargin { 2.50c }
```

When setting these options you must ensure that

```
@OddLeftMargin + @OddRightMargin = @EvenLeftMargin + @EvenRightMargin
```

In other words, the total margin on odd pages must be the same as on even pages.

You can have a box drawn around each page if you wish. Here are the relevant options and their default values:

```
@PageBoxType { None }
@PageBoxMargin { 1.00c }
@PageBoxLineWidth {}
@PageBoxPaint { None }
@PageBoxShadow { 0.06c }
```

You get boxes by changing the @PageBoxType option:

```
@PageBoxType { None }
```
(no box)

```
@PageBoxType { Box }
```



```
@PageBoxType { CurveBox }
```



```
@PageBoxType { ShadowBox }
```



Page boxes reduce the amount of space available to the page contents, so your columns will

become somewhat narrower and shorter when you introduce them.

The @PageBoxMargin, @PageBoxLineWidth, @PageBoxPaint, and @PageBoxShadow options affect the page box exactly as the margin, linewidth, paint, and shadow options described for other boxes in Section 8.2 do. For example,

```
@PageBoxType { CurveBox }
@PageBoxMargin { 1.0c }
@PageBoxPaint { grey }
```

draws a curved box, painted grey, around each page, with a one centimetre margin between its boundary and the page contents. If the left margin is 2.5 centimetres, say, this gives a total left margin from the page edge to the page contents of 3.5 centimetres.

Finally, it is possible to have something other than the usual white background on the page, using the @PageBackground option:

```
@PageBackground { @Scale 60d @Rotate lightgrey @Colour DRAFT }
```

The value of the option is an object which is drawn on each page, within the margins, before the page contents are drawn. This example draws a large word DRAFT in light grey diagonally across each page:

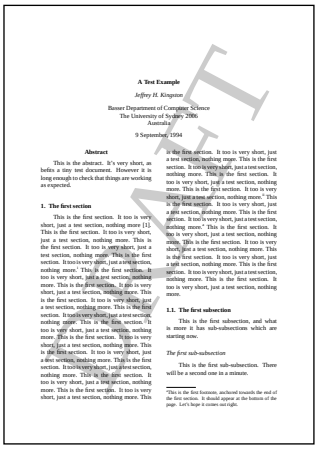
A Test Example
Jeffrey H. Kingston
Basser Department of Computer Science
The University of Sydney 2006
Australia
9 September, 1994
Abstract
This is the abstract. It's very short, as befits a tiny test document. However it is long enough to check that things are working as expected.
1. The first section
This is the first section. It too is very short, just a test section, nothing more [1]. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. 'This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more.
at the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more.' This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more. This is the first section. It too is very short, just a test section, nothing more.
1.1. The first subsection
This is the first subsection, and what is more it has sub-subsections which are starting now.
The first sub-subsection
This is the first sub-subsection. There will be a second one in a minute.
*This is the first footnote, anchored towards the end of the first section. It should appear at the bottom of the page. Let's hope it comes out right.
DRAFT

You have to find a suitable angle by experiment. As Section 8.4 explains, @Scale with no scale factor only takes account of the available horizontal space, not the available vertical space, so if your angle is too steep the result will be too tall for the page and you will get a regrettably obscure warning message about a 'broken size constraint.' The solution is to try a smaller angle.

Another useful page background draws marks to show where the margins lie:

```
@PageBackground { @BoundaryMarks }
```

produces something like this around each page:



The @BoundaryMarks symbol has options for controlling the line width (thickness), the line length, and the gap between the ends of the lines and the corner of the text area:

```
@PageBackground {
  @BoundaryMarks
    linewidth { 0.2p }
    length { 0.5c }
    gap { 0.5c }
}
```

This shows the default values: 0.2 points for line width, 0.5 centimetres for the others.

4.4. Page numbers and running headers

A *page header* is a line at the top of a page containing a page number or running title. A *page footer* is a similar line at the bottom of a page. This section describes the setup file options that control the appearance of page headers and footers.

There are four basic styles, selected by the @PageHeaders option:

@PageHeaders { None }	No page headers, no page footers.
@PageHeaders { Simple }	No footers, and a centred page number between hyphens for header on every page whose number is not 0 or 1.
@PageHeaders { Titles }	Full running titles as in the present document.
@PageHeaders { NoTitles }	Page numbers placed as for Titles, but with the titles themselves blanked out.

Titles and NoTitles use Lout's cross-referencing machinery, so will require a few runs to settle down. None and Simple do not, so they work first time and may be used with the -s command line flag. Section 2.8 has a fuller discussion of these ramifications of cross referencing.

The next step is to set the page numbers, using the @PageNumbers and @FirstPageNumber options. There are two useful values for @PageNumbers:

@PageNumbers { Arabic }	Arabic page numbers
@PageNumbers { Roman }	Lower-case Roman page numbers

although the full range of choices is None, Arabic, Roman, UCRoman, Alpha, and UCAlpha. @FirstPageNumber is the number of the first page. Its default value is of course 1, although

```
@FirstPageNumber { 0 }
```

might be useful if the first page is really an unnumbered cover sheet. @FirstPageNumber must be an Arabic number even if @PageNumbers is set to something other than Arabic.

Some document types, such as books and technical reports with cover sheets, have a separate introductory sequence of pages preceding the main sequence. For the page numbers on introductory pages there are two options, @IntroPageNumbers and @IntroFirstPageNumber, which are exactly analogous to @PageNumbers and @FirstPageNumber. It is traditional to number introductory pages using Roman numerals, so Roman is the default value of @IntroPageNumbers.

Let's summarize the five options so far by looking at their values in the book setup file, which was used to produce the present document:

```
@PageHeaders { Titles }
@PageNumbers { Arabic }
@FirstPageNumber { 1 }
@IntroPageNumbers { Roman }
@IntroFirstPageNumber { 1 }
```

The remainder of this section goes beyond these basic choices to explain how to change the detailed appearance of page headers and footers. Inevitably it gets quite a lot harder.

Pages are classified by the page header options in three ways:

1. *Odd vs. even.* The first page is odd, the second is even, the third is odd, and so on. If @FirstPageNumber is set to an even number, the first page will have that number, but it will still be classified as odd.

2. *Start vs. non-start*. A start page is the first page of some major part of the document (a chapter, say); other pages are non-start. The Simple header type uses a simpler definition: a page whose number is 0 or 1 is a start page, all others are non-start.

3. *Intro vs. non-intro.* Intro pages form a separate sequence of pages that precede the main (non-intro) sequence. They typically contain prefatory material such as a title page, preface, and table of contents. In a book there will always be an even number of Intro pages, even if it means that the last one is empty.

These classifications are quite independent of each other: a page could be a non-intro start odd page, or an intro non-start even page, and so on. This makes eight ($2 \times 2 \times 2$) possibilities altogether. Depending on the type of document there may also be pages that Lout will never place a page header or footer on. For example, no page headers or footers will appear on pages containing part titles in books.

If you choose @PageHeaders { None }, there are no page headers or footers, so there is nothing more to say. If you choose @PageHeaders { Simple }, then eight options become relevant for controlling the page headers on each of the eight kinds of pages. Here they are with their default values:

```
@OddTop { @Centre { - @PageNum - } }
@EvenTop { @Centre { - @PageNum - } }
@StartOddTop { @Null }
@StartEvenTop { @Null }
@IntroOddTop { @Null }
@IntroEvenTop { @Null }
@IntroStartOddTop { @Null }
@IntroStartEvenTop { @Null }
```

If the word Start is missing from an option name, the option applies to non-start pages; if Intro is missing, it applies to non-intro pages. Another eight options control footers in the same way:

```
@OddFoot { @Null }
@EvenFoot { @Null }
@StartOddFoot { @Null }
@StartEvenFoot { @Null }
@IntroOddFoot { @Centre @PageNum }
@IntroEvenFoot { @Null }
@IntroStartOddFoot { @Centre @PageNum }
@IntroStartEvenFoot { @Null }
```

The value of the option is an object which becomes the header or footer. It may be any object, but there are some peculiarities that will be explained now.

The full set of symbols of the BasicSetup package can be used when setting page header options (and indeed any of the options of the @BasicSetup @Use clause package), as well as symbols from special-purpose packages that have been included before this setup file. This means you can use any symbol you might reasonably expect to. But footnotes and floating figures and tables, for example, are not from BasicSetup so cannot be used.

There are five symbols of special relevance to page headers and footers: @Null, @Centre, @Center, @Right, and @PageNum.

The @Null symbol is similar to the empty object in printing as nothing, but in addition it removes the vertical space that ordinarily separates the header line from the page body. If there is no header there should be no vertical space either, so always use @Null rather than the empty object in header and footer options.

@Centre and @Center centre the following object, and @Right right-justifies it:

```
at left  @Centre { - 27 - }  @Right { at right }
```

produces

at left - 27 - at right

The objects should be enclosed in braces if they contain spaces.

The @PageNum symbol produces the number of the current page, in Arabic, Roman, etc. as specified by the @PageNumbers or @IntroPageNumbers option. @PageNum is available only within page header and footer options.

At this point you might like to pause and verify that the default values of the sixteen options given above produce what we said they would: no footers, and a centred page number between hyphens on every page whose number is not 0 or 1. It should be clear now what to do if you want to remove the hyphens, move the numbers to the page footer, make them bold, have them at the left on even pages and at the right on odd pages, and so on.

A different set of sixteen options applies when @PageHeaders is set to Titles or NoTitles. Here are the eight options for headers, with their default values:

```
@RunningOddTop { @I { @MinorNum @DotSep @MinorTitle }
    @Right @B @PageNum }
@RunningEvenTop { @B @PageNum
    @Right @I { @MajorNum @DotSep @MajorTitle } }
@RunningStartOddTop { @Null }
@RunningStartEvenTop { @Null }
@RunningIntroOddTop { @Null }
@RunningIntroEvenTop { @Null }
@RunningIntroStartOddTop { @Null }
@RunningIntroStartEvenTop { @Null }
```

Some options occupy two lines, but only because they are long: as usual, the end of a line is the same as one space. Here are the options for footers:

```
@RunningOddFoot { @Null }
@RunningEvenFoot { @Null }
@RunningStartOddFoot { @Centre { Bold 0.8f } @Font @PageNum }
@RunningStartEvenFoot { @Centre { Bold 0.8f } @Font @PageNum }
@RunningIntroOddFoot { @Right @PageNum  }
@RunningIntroEvenFoot { @PageNum }
@RunningIntroStartOddFoot { @Null }
@RunningIntroStartEvenFoot { @Null }
```

All these options are similar to the earlier ones, in providing one option for each of the eight kinds of pages. The names are the same except that Running is added to each. Remember that a start page is now one that begins a major part of the document.

In addition to the symbols described earlier for simple page headers and footers, these running header options may contain the symbols @MajorNum, @MajorTitle, @MinorNum, @MinorTitle, @DotSep, @NoDotSep, @DotJoin, @NoDotJoin, @DashJoin, and @NumSep described below.

The exact values of @MajorNum, @MajorTitle, @MinorNum, and @MinorTitle depend on the document type, but they are intended to describe what is on the current page. Here are some values typical of books:

```
@MajorNum     Chapter 2
@MajorTitle   Adding Structure to Documents
@MinorNum     2.7
@MinorTitle   Tables of contents
```

It is not possible to change the values assigned to these symbols, but the sixteen options allow you to choose whether to use them and how to arrange them, in the usual way.

The @DotSep symbol consumes the objects to its left and right and produces them separated by a dot and two spaces:

```
@MinorNum @DotSep @MinorTitle
```

is the same as

```
@MinorNum. @MinorTitle
```

However, if either object is empty, the dot and two spaces are omitted. It's a fine point, needed mainly for unnumbered chapters and sections. @DotJoin is the same as @DotSep but without the two spaces. NoDotSep is the same as @DotSep but leaving out the dot, @NoDotJoin is the same as @DotJoin but again leaving out the dot, and @DashJoin is the same as @DotJoin except that '–' replaces the dot.

Lout uses @DotSep between numbers and titles by default. To get rid of all dots between numbers and titles it is necessary to change all occurrences of @DotSep in the setup file to @NoDotSep. There are about ten occurrences, depending on the setup file.

@NumSep is similar to @NoDotSep except that one space is used, not two, and also the order of the two parts is reversed and a dot is added if the current language is Hungarian (apparently Hungarians write '3. Table' where other people write 'Table 3'). @NumSep is used behind the scenes in a variety of places.

The present document was produced using @PageHeaders { Titles } with the default values of the sixteen options unchanged, as you might like to verify. @PageHeaders { NoTitles } is identical to @PageHeaders { Titles } except that @MajorNum, @MajorTitle, @MinorNum, and @MinorTitle are always replaced by empty objects. The description given at the beginning of this section, 'like Titles but with the titles blanked out,' is therefore accurate.

There is a @StructPageNums setup file option that produces structured page numbers when it is changed to Yes; that is, page numbers that include a section number, subsection number, and so on. Precisely which structure numbers are included is determined by the @SectionNumInRunners option and its relatives. @PageHeaders must be Titles when structured page numbers are used, and it is probably best to set @SectionGap and some similar options to 2b (meaning new page) as well. The @NumberSeparator setup file option (Section 2.7) affects the format of the structured page numbers.

Chapter 5. References

The simple way to make a list of references is to put them in a numbered or tagged list at the end of your document. If you use references only rarely, that is probably the best way, but if you use them frequently this chapter will save you hours of work in the long run.

Some good general principles and many examples have been given by van Leunen [11]. Broadly speaking Lout follows her recommendations, with some unification and scaling back as is inevitable with software. Scribe [9] and LaTeX [7] followed the first edition of the same source, so translation from Scribe and LaTeX references is fairly straightforward.

5.1. Setting up a bibliographic database

The basic idea is to store your references in a separate *database file*, in a form which does not include formatting details such as font changes. This makes it easy to use the same references in many documents, and it leaves the formatting to Lout. Here is an example of a reference as it would appear in a database file:

```
{ @Reference
   @Tag { vanleunen1992 }
   @Type { Book }
   @Author { Mary-Claire van Leunen }
   @Title { A Handbook for Scholars }
   @Publisher { Oxford }
   @Edition { Revised Edition }
   @Year { 1992 }
}
```

@Reference is a symbol, and @Tag, @Type, @Author, and so on are its options. The database file as a whole consists of a sequence of references, each enclosed in braces as shown.

The @Tag option is compulsory: since you cite a reference by giving its tag, there must be one. The @Type option is also compulsory, since it says whether the reference is to a book, a journal article, or whatever, and this determines what other options are required. Section 5.4 describes all the types provided by Lout, and Section 5.6 explains how to add your own.

Lout database file names must end in .ld, so now suppose that you have made one called refs.ld and put it in the same directory as your document. Next, place

```
@Database @Reference { refs }
```

at the start of your document, just before @Doc, @Document, @Report, or whatever. Alternatively, you may place it at the end of your setup file. It informs Lout that you might be referring to @Reference symbols in database refs (that is, in file refs.ld).

If you want to maintain a central database, used by many documents, you won't want it in the same directory as any one of them. A Unix pathname will be more appropriate:

```
@Database @Reference { "/usr/jeff/lib/refs" }
```

or whatever. Quotes are needed because of the / characters.

With the database file created and the @Database line in place, you are ready to start citing references. The first time that the database is used, Lout will create an *index file* whose purpose is to speed up the retrieval of your references. Thanks to this file you can have hundreds or even thousands of references in your database, without slowing Lout down very much. However, whenever you change your database file *you must remove its corresponding index file*, so that Lout knows to create it afresh.[1] The index file is stored in the same directory as the database file, and it has the same name except that it ends in .li rather than .ld (e.g. refs.li).

If a separate database file is not convenient for some reason, perhaps because you need a self-contained document in a single file, the @Reference symbols may be incorporated into the document itself, anywhere that ordinary text may appear. Nothing will appear where they are typed in, but Lout will notice them and treat them as if they had come from a database file. In this case no @Database symbol is needed unless you are referring to a database as well.

You may have multiple databases, like this:

```
@Database @Reference { myrefs }
@Database @Reference { "/usr/pub/refs/theoryrefs" }
```

Lout will search the databases in the order you list them.

5.2. Citation

To cite one or more references, use the @Cite symbol like this:

```
This feature is beyond our scope @Cite { $kingston1995lout.expert, page 97 }.
```

The following object must be enclosed in braces. It may be an arbitrary object as usual. Within it the $ character is a symbol with a special meaning: it causes a citation to be made of the reference whose @Tag option is the word following the $ symbol:

This feature is beyond our scope [5, page 97].

The reference itself will appear automatically in a reference list at the end of the document, and the citation(s) will be enclosed in brackets as shown. There is no need to write ${kingston1995lout.expert}, as would normally be the case, because within @Cite special arrangements are made to prevent commas and semicolons from being a nuisance.

A reference may be cited many times, but it will appear in the reference list only once. The references will ordinarily be sorted by tag and labelled with Arabic numbers, although this can

[1] Depending on how it was installed on your system, Lout may be able to use the time of last modification of the database file and its index file to determine automatically whether the index file needs to be created afresh, thus saving you the trouble of removing it. You can find out whether this is true of your system by typing the command lout -V.

be changed by setting options in the setup file (Section 5.5).

If you are making a book, there is a @ChapCite symbol which is the same as @Cite except that its references come out at the end of the current preface, introduction, chapter, or appendix, rather than at the end of the document.

It is quite all right to cite a reference from within a footnote, figure, table, or index entry. The reference will appear in the closest reference list following the citation point in the final printed document, or if there is no such list, the closest preceding reference list. This is fine in documents with just one reference list; but when using @ChapCite in books, if the citation point appears after the intended reference list (because the footnote or figure has floated past the reference list at the end of the chapter), the reference will come out in the wrong list.

Although it is frowned upon by the authorities, some people include references which are not cited anywhere in the body of their document. For this there is @NoCite:

```
... our scope @NoCite { $kingston1995lout.expert, $kingston1993lout.design }.
```

produces

> … our scope.

with the @NoCite symbol and any preceding space removed. The references will nevertheless appear in the reference list as usual. There is a @NoChapCite symbol that combines @NoCite and @ChapCite. For compatibility with previous versions of Lout, there is a @Ref symbol:

```
@Ref kingston1995lout.expert
```

is the same as @Cite { $kingston1995lout.expert } without the brackets. There are analogous @ChapRef, @NoRef, and @NoChapRef symbols, which are not recommended.

The @RefPrint symbol will print a reference on the spot:

```
@RefPrint kingston1995lout.expert
```

has result

> Jeffrey H. Kingston. *An Expert's Guide to the Lout Document Formatting System (Version 3)*. Basser Department of Computer Science, University of Sydney, 1995.

unrelated to any reference list. For example,

```
@Heading { Journal Articles }
@NumberedList
@LI @RefPrint kingston1985tree
...
@LI @RefPrint kingston1993lout.design
@EndList
```

might appear in someone's resume.

5.3. Labelled (as opposed to numbered) references

Lout ordinarily assigns a number to each reference, and prints this number beside the reference in the reference list and at the point(s) of citation. There is a way to make Lout use a label of your choice instead of a number for each reference. First change the following setup file options to the values shown (these options are explained in Section 5.5):

```
@RefCiteLabels { @Label }
@RefListLabels { @Label. }
@RefListLabelWidth { 4.00f }
@RefListSortKey { @Label }
```

Then make sure that every reference you cite has a @Label option:

```
{ @Reference
   @Tag { kingston1995lout.expert }
   @Type { TechReport }
   @Label { Kin94 }
   ...
}
```

@Label may contain several words, and even font changes, but not an arbitrary object.

The effect of these changes is that your references will now be labelled with their @Label options instead of with numbers, and they will be sorted by label instead of by tag. However, tags are still used when citing.

The big problem with labels is that they vary from document to document, either because of a change of style or because the usual first few letters of the authors' names plus year has to be augmented with a, b, c etc. to distinguish publications by the same authors in the same year. To help you overcome these problems, the $ symbol has a label option:

```
@Cite { $ label { Kin94a } kingston1995lout.expert, ... }
```

The @Ref and @ChapRef symbols also have a label option. If you use this option, it will be used to label the reference instead of the @Label option from the @Reference symbol (indeed, the @Reference symbol need have no @Label option in this case). But note that using label does not itself give you labelled references; you get them with the setup file options as explained above.

If your labels turn out to be too wide for the space allowed for them in the reference list, you have two alternatives. One is to increase the @RefListLabelWidth setup file option shown above, since it determines this space. The other is to change the @RefListFormat setup file option to DropLabels, which produces drop items:

Kin94a.
: Jeffrey H. Kingston. *An Expert's Guide to the Lout Document Formatting System (Version 3).* Basser Department of Computer Science, University of Sydney, 1995.

Then it won't matter how wide your labels are.

5.4. Constructing database entries

Here is the complete, fixed list of options that you may give to the @Reference symbol:

```
{ @Reference
   @Tag {}              Used to cite this reference
   @Type {}             The type of reference, for example Book, Article
   @Abstract {}         Not used, intended to hold an abstract
   @Address {}          The address of a publisher, organization, or institution
   @Annote {}           Not used, intended for annotations
   @Author {}           The author(s) or editor(s)
   @Day {}              The day of the month, for newspaper articles
   @Edition {}          The edition, for example Second Edition
   @HowPublished {}     How something strange has been published
   @InAuthor {}         The author of the work that the cited work appears within
   @InTitle {}          The title of the work that the cited work appears within
   @Institution {}      The institution or school
   @Journal {}          The journal name
   @Keywords {}         Not used, intended to hold keywords
   @Label {}            The label of a labelled reference
   @Month {}            The month of publication or writing
   @Note {}             Any additional helpful information
   @Number {}           The number of a technical report
   @Organization {}     The organization sponsoring the work
   @Page {}             Page number if only one, for example 23
   @Pages {}            Page numbers if more than one, for example 23--47
   @Pinpoint {}         A point or part of the work, for example Chapter VI
   @Publisher {}        The publisher of the work
   @Title {}            The title of the work
   @TitleNote {}        Additional title information (series, editor, etc.)
   @TRType {}           The type of a technical report, for example Research Note
   @URL {}              The URL of the reference
   @Volume {}           The volume of a journal
   @Year {}             The year of publication or writing
}
```

Every reference may contain any of these options, although, depending on the @Type option, only some will be printed. You can't give an option twice; in particular, multiple authors must be placed within one @Author option, arranged as you want them to appear. Here is the complete set of values that you may give to the @Type option:

Book	TechReport	Article	InBook
Proceedings	MastersThesis		InProceedings
PhDThesis	Misc		

Each column represents one broad category of reference type: the first contains large works; the second contains small works not appearing within anything else (although possibly part of

a series); the third contains small works appearing within an ongoing forum for such works; and the fourth contains small works appearing within large works. In each case, the reference may be to the work as a whole, or to one point or part of it (known as pinpointing).

Some care is needed when choosing the @Tag option, since references are both cited and sorted by tag. It is best to choose a three-part tag consisting of the first author's surname and possibly initial, the year of publication, and a brief reminder of the contents:

```
@Tag { kingston1995lout.expert }
```

Keep to lower-case letters, since mixed cases confuse the sorting, and give the full four digits of the year to avoid trouble in the year 2000. Multi-word tags are possible but not recommended.

Unusually for Lout, you can have unquoted / and ~ characters inside the @URL option:

```
@URL { ftp://ftp.cs.su.oz.au/jeff/lout }
```

In fact it is better not to use quotes because then Lout will be able to break lines at / characters, which is very useful since URLs tend to be long and prone to causing bad line breaks.

Since the types within each broad category are similar, our plan is to give one example of each and briefly note how the others differ. Here is a Book entry showing all its options:

```
{ @Reference
    @Tag { homer.odyssey }
    @Type { Book }
    @Author { Homer }
    @Title { The Odyssey }
    @TitleNote { Translated by E. V. Rieu }
    @Pinpoint { Chapter VI }
    @Pages { 102--111 }
    @Page { 102 }
    @Publisher { Penguin Books }
    @Address { Harmondsworth, Middlesex }
    @Edition { Penguin Classics Edition }
    @Month { August }
    @Year { 1942 }
    @Note { The date of composition is unknown,
but is thought to be about the tenth century BC. }
}
```

And here is what it produces:

> Homer. *The Odyssey*, Chapter VI, pages 102–111, page 102. Translated by E. V. Rieu. Penguin Books, Harmondsworth, Middlesex. Penguin Classics Edition, August 1942. The date of composition is unknown, but is thought to be about the tenth century BC.

The only compulsory options are @Tag, @Type, and @Title, and Lout will carefully adjust the formatting to the right thing when you omit others. A basic book would have just @Tag, @Type, @Author, @Title, @Publisher, and @Year options.

Proceedings is similar, except you may have an @Organization or @Institution option for the sponsoring organization if you wish, and the author will either be absent or an editor:

```
@Author { P. W. Lamb, editor }
```

There is no option specifically for editors, translators, and so forth.

PhDThesis is very similar again, with @Institution instead of @Publisher, and the phrase 'Ph.D. thesis' appearing by magic in the right spot. Like all words and phrases introduced automatically by Lout, it will be translated into the current language if this is not English.

Moving now to the second broad category, here is a typical TechReport:

```
{ @Reference
    @Tag { christofides1976tsp }
    @Type { TechReport }
    @Author { Christofides, N. }
    @Title { Worst-case analysis of a new heuristic
for the travelling salesman problem }
    @Number { 388 }
    @Institution { Graduate School of Industrial
Administration, Carnegie-Mellon University }
    @Address { Pittsburgh, PA }
    @Year { 1976 }
}
```

Here is the result:

> N. Christofides. Worst-case analysis of a new heuristic for the travelling salesman problem. Tech. Rep. 388 (1976), Graduate School of Industrial Administration, Carnegie-Mellon University, Pittsburgh, PA.

The two novelties here are the @Number option, which is the number of the report, and the 'Tech. Rep.' phrase. If you need some other phrase instead, use the @TRType option:

```
@TRType { Programmer's Manual }
```

or whatever. The phrase will be 'Master's Thesis' in the current language for type MastersThesis, and absent in type Misc. You may use the pinpointing options (@Pinpoint, @Page, and @Pages) and @TitleNote, @Month, and @Note in the same way as for books.

Journal articles are referenced by journal name, volume, number, and page(s):

```
{ @Reference
    @Tag { kingston1993lout.design }
    @Type { Article }
    @Author { Jeffrey H. Kingston }
    @Title { The design and implementation of the
Lout document formatting language }
    @Journal { Software---Practice and Experience }
    @Volume { 23 }
    @Pages { 1001--1041 }
    @Year { 1993 }
}
```

The result of this is

> Jeffrey H. Kingston. The design and implementation of the Lout document formatting language. *Software—Practice and Experience* **23**, 1001–1041 (1993).

All are optional, as usual. Notice that @Pages and @Page refer to the whole article so are not available for pinpointing here, but you may still use @Pinpoint.

Finally, small works that appear within large works have @Author and @Title options for the work itself, and @InAuthor and @InTitle for the work that it appears within:

```
{ @Reference
    @Tag { rieu1942intro }
    @Type { InBook }
    @Author { E. V. Rieu }
    @Title { Introduction to @I { The Odyssey } }
    @InAuthor { Homer }
    @InTitle { The Odyssey }
    @Publisher { Penguin }
    @Year { 1942 }
}
```

@InAuthor would often be absent or an editor. The result is

> E. V. Rieu. Introduction to *The Odyssey*. In Homer, *The Odyssey*. Penguin, 1942.

The other options are as for large works. Type InProceedings is similar to InBook.

A database usually has a long life, and some day it might find itself used in a document whose language is not the one its original compiler had in mind. For this reason, a truly meticulous compiler of database entries would enclose *all* language-specific options in @Language symbols:

```
{ @Reference
   @Tag { zimand1986size.sets.strings }
   @Type { Article }
   @Author { French @Language { M. Zimand } }
   @Title { English @Language { On the topological size of sets of random strings } }
   @Journal { German @Language { Zeitschr. f. math. Logik und Grundlagen d. Math. } }
   @Volume { 32 }
   @Pages { 81--88 }
   @Year { 1986 }
}
```

(My apologies to M. Zimand if he or she is not French.) This ensures correct hyphenation whatever the language of the document in which the reference appears.

5.5. Changing the appearance of citations and the reference list

By default, citations appear like this [5], and the reference list appears like the one at the end of this document, with the entries numbered, and sorted by their @Tag options. This section explains how to change all this, by setting options in the setup file.

For a general introduction to setup files and their options, see Section 4.1. Here we just describe the setup file options that relate to references. Here they are, with their default values:

```
@MakeReferences { Yes }
@RefCiteStyle { [cite] }
@RefCiteLabels { @RefNum }
@RefNumbers { Arabic }
@RefListFormat { Labels }
@RefListLabels { [@RefNum] }
@RefListTitle { references }
@ChapRefListTitle { references }
@RefListIndent { 0c }
@RefListRightIndent { 0c }
@RefListGap { 1.00v }
@RefListFont { }
@RefListBreak { }
@RefListLabelWidth { 2.00f }
@RefListSortKey { @Tag }
```

Setting @MakeReferences to No will cause Lout to ignore all citation symbols and omit all reference lists.

@RefCiteStyle and @RefCiteLabels combine to determine the appearance of citations. The result of each @Cite symbol is the value of @RefCiteStyle with the cite symbol replaced by the object following the @Cite symbol. For example, the default value shown above encloses each citation in brackets. The cite symbol must appear exactly once within @RefCiteStyle.

@RefCiteLabels determines the appearance of each label within the citation. Within it, the @RefNum symbol will produce the number of the reference, and you may also use any of the

options of the @Reference symbol listed at the beginning of Section 5.4:

@RefCiteLabels { @RefNum }	[3]
@RefCiteLabels { @Label }	[Kin93]
@RefCiteLabels { @Author, @Year }	[Jeffrey H. Kingston, 1993]

The value of @RefCiteLabels may be any object. The @Label symbol will produce the label option of $ or @Ref if there is one, rather than the @Label option of the reference; this label option is explained in Section 5.3.

@RefNumbers determines the kind of numbering produced by the @RefNum symbol used within @RefCiteLabels above and @RefListLabels below. Its value may be Arabic, Roman, UCRoman, Alpha, or UCAlpha, as usual for numbering in Lout. If you don't use @RefNum, @RefNumbers has no effect.

The remaining eleven setup file options are all concerned with the appearance of the reference list. The first, @RefListFormat, determines the overall format of the list. Here is what its four possible values do:

@RefListFormat { NoLabels }	William Strunk and E. B. White. *The Elements of Style.* Macmillan. Third Edition, 1979.
@RefListFormat { Labels }	10. William Strunk and E. B. White. *The Elements of Style.* Macmillan. Third Edition, 1979.
@RefListFormat { DropLabels }	10. William Strunk and E. B. White. *The Elements of Style.* Macmillan. Third Edition, 1979.
@RefListFormat { InLabels }	10. William Strunk and E. B. White. *The Elements of Style.* Macmillan. Third Edition, 1979.

@RefListFormat is not concerned with the appearance of the labels and references, only with where they appear.

@RefListLabels determines the appearance of the labels in the reference list (and so has no effect if @RefListFormat is NoLabels). It is a combination of @RefCiteStyle and @RefCiteLabels; you can use @RefNum and all the options of @Reference within it. The default value,

```
@RefListLabels { @RefNum. }
```

produces a numbered reference list in the style of @NumberedList. Another useful value is

```
@RefListLabels { [@Label] }
```

which produces the @Label option of the reference, or the label option of the citation if there is one, enclosed in brackets. If you do switch to non-numeric labels you will need to either use DropLabels or else increase the @RefListLabelWidth option described below.

@RefListTitle determines the heading placed just before the reference list at the end of

the document:

```
@RefListTitle { Further Reading }
```

Two special values, references and bibliography, produce References and Bibliography in English and their equivalents in other languages. @ChapRefListTitle is the same as @RefListTitle, but applied to the reference list at the end of each chapter of a book when @ChapCite is used.

@RefListIndent, @RefListRightIndent, and @RefListGap determine the left indent, right indent, and gap between reference list items, analogously to the indent, rightindent, and gap options of the @List symbol (Section 2.2). @RefListFont and @RefListBreak determine the font and paragraph breaking style of the reference list. For example,

```
@RefListFont { -2p }
@RefListBreak { 1.2fx outdent }
```

switches to a smaller size with outdented paragraphs (these work well with NoLabels). The empty default values produce the same font and break style as in the document as a whole.

@RefListLabelWidth determines the distance from the left edge of the labels to the left edge of the references, when @RefListFormat is Labels or DropLabels (it has no effect when @RefListFormat is NoLabels or InLabels). This is different to @RefListIndent, which determines the distance from the edge of the column to the left edge of the item.

Particular care is needed when @RefListFormat is Labels and the labels are non-numeric, for then if the labels are too wide they will overstrike the references. The default value, 2.00f, is twice the current font size. It may be changed to any length (Section 1.2). Regrettably, Lout is not clever enough to choose a good value by itself.

Finally, @RefListSortKey determines the sorting key used when ordering the reference list. The default value,

```
@RefListSortKey { @Tag }
```

sorts by tag; the other popular possibility is to sort by the @Label option:

```
@RefListSortKey { @Label }
```

As usual @Label will use the value of a label option to the citation if there is one. There is no way to sort by order of first appearance in the document.

@RefListSortKey may be any sequence of words and options from the @Reference symbol, but not @RefNum for obvious reasons. A possible more elaborate sorting key is

```
@RefListSortKey { @Author:@Year:@Tag }
```

sorting first by author, then by year within each author, and finally by tag. However you are supposed to choose tags which have this effect, and that is more reliable since the modern practice is to put the authors' surnames after their given names. There seems to be little practical use for sorting keys other than @Tag and @Label.

A colon within the @RefListSortKey option is converted by Lout into a character smaller than any printable character, which ensures that the sorting is carried out separately on the three

fields. It is essential that the sort key uniquely identify the reference, because if two sort keys are equal only one of the references will be printed. The easiest way to ensure this is to always include @Tag in the sort key.

5.6. Creating your own entry types and formats

Although the set of options to the @Reference symbol (@Tag, @Type, @Author, etc.) is fixed, you can add your own reference types and change the formatting of existing types.

To do this you must be using your own setup file, as explained in Section 4.1. At the end of the setup file you will find this line:

```
@SysDatabase @RefStyle { refstyle }
```

This tells Lout to consult a database file of reference styles called refstyle.ld. These are not references, they are formatting styles, one for each reference type. The Sys in @SysDatabase means that this file is stored in the *Lout system database directory*, which is where all the standard databases are kept. To change the formatting of a reference type, or to add your own types, you need to create your own reference styles database file by copying and modifying refstyle.ld.

To find out the name of the Lout system database directory, type the Unix command

```
lout -V
```

Then, supposing that the Lout system database directory is /usr/lout/data, type

```
cp /usr/lout/data/refstyle.ld mystyle.ld
```

to place a copy of the refstyle.ld database file in your directory, renaming it mystyle.ld. Since refstyle.ld is read-only, you may also need to change the mode of mystyle.ld to be writable (by chmod +w mystyle.ld in Unix). Now replace

```
@SysDatabase @RefStyle { refstyle }
```

at the end of your setup file by

```
@Database @RefStyle { mystyle }
```

and Lout will read its reference styles from mystyle.ld instead of refstyle.ld. Since the two are at present identical, this has changed nothing so far; but now any changes you make to mystyle.ld will affect your document. Changing @SysDatabase to @Database makes Lout search your current directory for mystyle.ld, whereas @SysDatabase searches only the system directory.

In practice you will probably want to store your database of reference styles in some library directory, so that it can be used by many documents. A Unix pathname is appropriate for this:

```
@Database @RefStyle { "/usr/jeff/lib/mystyle" }
```

Quotes are needed because of the / characters.

The database entries within refstyle.ld and mystyle.ld might look something like this:

```
{ Book @RefStyle @Style
  {  @Reference&&reftag @Open
     {
       @Author.  @I @Title.  @Publisher, @Year.
     }
  }
}
```

The meaning of the first two lines is beyond our scope, except that Book on the first line means that this is the entry which defines how references of type Book will be printed. Fortunately, apart from this one word these two lines are the same in every reference style entry so you don't need to understand them. The important part is in the middle:

```
@Author.  @I @Title.  @Publisher, @Year.
```

The meaning should be clear: first print the author option and a full stop, then the title option and another full stop in italics, and so on. To change the formatting of books, change this object. To create a new reference type, copy the entire database entry, change Book to a new name of your choice, and change the middle part. Don't forget to delete the index file mystyle.li afterwards, if there is one, so that Lout knows to generate it afresh.

Although the entry shown above is perfectly viable, the real entry for Book is much more complicated, in part because there are more options than those basic four, but mainly because the real entry goes to great lengths to do the right thing when options are omitted:

```
{ Book @RefStyle @Style
  {  @Reference&&reftag @Open
     {
       {  @Author. {}                          }  @If  @Author
       {  @I @Title                            }  @If  @Title
       {  @Word&&notitle                       }  @If  @Not @Title
       {  , @Pinpoint                          }  @If  @Pinpoint
       {  , @Word&&pages @NumSep @Pages        }  @If  @Pages
       {  , @Word&&page @NumSep @Page          }  @If  @Page
       {  .  @TitleNote                        }  @If  @TitleNote
       {  .  @HowPublished                     }  @If  @HowPublished
       {  .  @Publisher                        }  @If  @Publisher
       {  .  @Organization                     }  @If  @Organization
       {  .  @Institution                      }  @If  @Institution
       {  , @Address                           }  @If  @Address
       {  .  @Edition                          }  @If  @Edition
       {  , @Month @Year                       }  @If  @Year @And @Month
       {  , @Year                              }  @If  @Year @And @Not @Month
       {  .                                    }  @If  @True
       {  {}  URL @URL.                        }  @If  @URL
       {  {}  @Note                            }  @If  @Note
     }
  }
}
```

The meaning is that each object to the left of an @If will be printed only if the condition to the

right of the @If is true. The condition may contain options, which are considered to be true if they are not omitted (non-empty), and it may contain @And, @Or, @Not, and @True with the usual precedence and meaning. Sub-conditions may be enclosed in braces if desired, although it is best to keep the conditions as simple as possible given the complexity of the whole setup.

The objects subject to @If are printed with no space preceding them; any space in the final print will be the result of space within them, not between them. This is why @If @True is not redundant.

The object @Word&&notitle produces No title in the current language; @Word&&pages produces pages in the current language, and so on. Consult database standard.ld for other standard words and phrases, and page 91 for @NumSep.

Chapter 6. Tables

This chapter explains how to produce tables like this one:

Value of mathematical formulae (millions of dollars)		
Quadratic formula	$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$	3.5
Binomial theorem	$(a+b)^n = \sum_{k=0}^{\infty} \binom{n}{k} a^k b^{n-k}$	12

As the example shows, the tables may contain spanning columns, aligned columns, and rules, and the cells may contain arbitrary objects.

6.1. Getting started

The Lout definitions for table formatting[1] are kept in a file called tbl, which you must include at the start of your document if you want tables, like this:

```
@SysInclude { tbl }
@SysInclude { doc }
@Doc @Text @Begin
...
@End @Text
```

Specialized setup files, like tbl, are included before the main setup file (doc in this case). Alternatively, if you are using your own setup file, you may place the include commands within it, near the start.

To begin with a very simple example, the table

Austen	Chaucer	Donne
Balzac	Darwin	Goethe
Byron	Dickens	Homer

is produced by the following input:

[1]The tbl package described here replaces the tab package of Version 3.12 and earlier. For backward compatibility the tab package is still available and still works as described in older versions of this documentation. Users of tab will find simple uses of tbl to be very similar, replacing @Tab by @Tbl, @Fmta by aformat, @Col by @Cell, and ! by |.

```
@Tbl
   aformat { @Cell A  |  @Cell B  |  @Cell C }
{
@Rowa
   A { Austen }
   B { Chaucer }
   C { Donne }
@Rowa
   A { Balzac }
   B { Darwin }
   C { Goethe }
@Rowa
   A { Byron }
   B { Dickens }
   C { Homer }
}
```

Immediately after the @Tbl symbol, which introduces the table, comes a *format option*, aformat, describing the format of each row. It says that each row contains three cells: @Cell A, @Cell B, and @Cell C. The format option may have up to 26 cells, with names chosen freely from the upper-case letters from A to Z. The symbol | separates each cell from the next.

After the format option comes the body of the table, enclosed in braces. It consists entirely of a sequence of rows, each introduced by a @Rowa symbol and containing one entry for each cell of the format option, as shown (the row may occupy any number of lines of the input file). The entries may be arbitrary Lout objects, such as words, paragraphs, equations, figures, and so on without restriction. An entry may be omitted altogether if it is empty. Lout will choose suitable widths for the cells, and break paragraphs in the entries to the right widths.

The result of the @Tbl symbol is an object. As usual with Lout, this object may appear at any point in the document,[1] even within a paragraph or another table. Most commonly, though, tables are displayed using the @IndentedDisplay and @CentredDisplay symbols (Section 2.1):

```
@CentredDisplay @Tbl ...
```

or else they go into the @Table symbol (Section 2.6):

```
@Table
   @Caption { ... }
@Tbl ...
```

which centres them at the top of the following page and adds a caption. Note the difference between @Tbl, which builds a table, and @Table, which places an arbitrary object in an appropriate place. It's important to remember that the result is an object like any other, because from time to time one wants such things as rotated tables whose entire contents are to be italicised:

[1] In rare cases, when the table occupies an entire paragraph but is not displayed, a bug in the current version of Basser Lout causes the second column to appear much too far to the right. Until the problem is fixed, the first thing to try if this occurs is to replace the very first row symbol (@Rowa, @Rowb, etc.) by @FirstRowa, @FirstRowb, etc.

```
90d @Rotate @I @Tbl ...
```

and it helps to remember that the full power of Lout can be brought to bear on the *entire* table.

6.2. Changing the appearance of cells

The @Cell symbol offers a few options for changing the appearance of entries placed in it. Like all options, these appear immediately after the @Cell symbol, with their values in braces:

```
@Tbl
  aformat { @Cell paint { lightgrey } font { Italic } break { clines } A }
{
@Rowa A {
IMPORTANT
Do not throw stones at this notice
}
}
```

The result here is

IMPORTANT
Do not throw stones at this notice

with a light grey background, Italic font, and clines paragraph breaking style. The paint colour may be any colour from Section 8.1. Another option, background, allows an arbitrary object to be placed in the background of the cell, in front of any paint but behind the entry.

Later sections introduce other @Cell options, for fixed-width columns, indented entries, margins, and rules. It is also possible to combine other symbols from Lout with cell formatting, by placing them between the @Cell symbol and its following letter, like this:

```
@Tbl
   aformat { @Cell 90d @Rotate @S A | @Cell @B grey @Colour B }
{
@Rowa
   A { Col A }
   B { Col B }
}
```

Think of the A as standing for the value of the A option of the @Rowa symbol (which it does), and you'll see that this is just Lout's usual rule of symbols applying to the object that follows them. The result here is

COL A **Col B**

In simple cases @B is easier than font { Bold }; the latter is useful as a default value, as we will see in a moment. Note the difference between a coloured background, obtained with paint, and

a coloured entry, obtained using the @Colour symbol.

@Tbl offers many places where you can set cell options. The meaning of the option is the same wherever you set it; what changes is the extent of its application. Taking the paint option as a representative example, the most specific place to set it is at a @Cell symbol as above; then it affects only that cell in rows formatted using that format. Alternatively,

```
@Tbl
   apaint { lightgrey }
   aformat { @Cell A | @Cell B }
```

will paint every cell in the aformat. And

```
@Rowa
   paint { lightgrey }
   A { ... }
```

will paint every cell in a particular row. To paint the entire table, use

```
@Tbl
   paint { lightgrey }
```

And finally, there is a paint option in the setup file (Section 6.13), which if set will paint every table in the document. When a more general setting of an option is contradicted by a more specific setting (e.g. when @Tbl has paint { lightgrey } but some cell or row has paint { nopaint }), the more specific setting applies. For a precise description, see Section 6.14.

6.3. Changing the appearance of rows

We've seen that the aformat option of @Tbl determines the format of the rows introduced by the @Rowa symbol. There are eight of these row format options: aformat, bformat, and so on up to hformat, and for each there is a corresponding @Row symbol: @Rowa, @Rowb, and so on up to @Rowh:

```
@Tbl
   aformat { @Cell @I A  |  @Cell @I B }
   bformat { @Cell A  |  @Cell B }
{
@Rowa
   A { Name }
   B { Nationality }
@Rowb
   A { Austen }
   B { English }
@Rowb
   A { Balzac }
   B { French }
}
```

The result of this is

Name	*Nationality*
Austen	English
Balzac	French

The first row, being a @Rowa, is formatted using aformat; the others, being @Rowb symbols, are formatted using bformat.

In addition to the eight format options of @Tbl, it is possible to specify the format of a row at the row itself, using the @Row symbol like this:

```
@Row
  format { @Cell @B A | @Cell paint { lightgrey } B }
  A { ... }
  B { ... }
```

All formats must contain the same number of cells, otherwise the table will not be rectangular.

6.4. Margins

The @Cell symbol offers a margin option for changing the amount of margin left between the entry and the boundary of the cell:

```
@Cell margin { 0.3f }
```

The default values are different for horizontal and vertical margins, which brings us to the marginhorizontal and marginvertical options:

```
@Cell
  marginhorizontal { 0.6f }
  marginvertical { 0.3f }
```

These are the default values, 0.6 and 0.3 times the current font size respectively. Another useful value is marginvertical { 0.5vx }, which asks for a vertical margin of half the current line separation, but measured from baseline to baseline (this is what the x means). This produces a separation equal to the separation of the surrounding lines:

Austen	Chaucer	Donne
Balzac	Darwin	Goethe
Byron	Dickens	Homer

This margin does not work so well when the cells contain paragraphs, diagrams or other things that could not be described as single lines.

There are marginabove, marginbelow, marginleft, and marginright options for setting margins individually. For example, sometimes you don't want the extreme left and right margins in a table, and they can be got rid of like this:

```
@Tbl
   paint { lightgrey }
   aformat { @Cell ml { 0i } A  |  @Cell B  |  @Cell mr { 0i } C }
{
@Rowa
   A { Column A }
   B { Column B }
   C { Column C }
}
```

We've used abbreviated versions of the options' names: ml for marginleft, and mr for marginright. Every option has such an abbreviated name, made from the first letters of the parts of its full name (Section 6.14 lists all these names). The result is

Column A	Column B	Column C

with the painting showing the reduced margins.

6.5. Cell width and height

Lout is quite good a choosing suitable widths for cells. It leaves narrow cells at their natural width, then uses paragraph breaking to reduce the wider cells to a common width which is as large as the available space allows:

Acacia	Shrub or small tree with grey-green foliage and brilliant yellow blossom in late winter.	Distributed widely throughout Australia except in the most arid parts; many varieties.

This usually looks good, but if you need something else, the width option may be used to give a particular width to a cell:

```
@Cell width { 3c }
```

Here we have asked for a cell width of three centimetres; this includes the cell margins. When using width to fine-tune the appearance of a table wide enough to require paragraph breaking, it is best to use width to make cells narrower, not wider.

Regrettably, there is no way to request that several cells in a row be given a common width equal to the width of the widest. One simple way to approximate this is to give these cells the same width value. The width option also has a special value, expand. All cells with width { expand } are assigned a common width equal to the maximum amount permitted by the available space. For example,

```
@QuotedDisplay @Tbl
   width { expand }
   paint { lightgrey }
   aformat { @Cell A  |  @Cell B  |  @Cell C }
{
@Rowa
   A { 23.56 }
   B { 98.76 }
   C { 65.00 }
}
```

has result

23.56	98.76	65.00

We have used our usual trick of making the option apply to several cells by moving it to a more general level, in this case to @Tbl. The available space can be reduced using the @Wide symbol; if we replace @QuotedDisplay @Tbl in the example above with

```
@CentredDisplay 4i @Wide @Tbl
```

the result will be

23.56	98.76	65.00

with the total table width reduced to four inches.

There is an analogous height option which makes a cell take on a particular fixed height, again including margins. Make sure there is enough height in the cell to hold its entry when you use this option. The expand value is not available for height.

6.6. Indenting and struts

By default, entries appear at the left within cells, not counting the cell margin. The indent option causes entries to be indented horizontally. For example,

```
@Cell indent { ctr }
```

horizontally centres the entry within the cell. The other possible values of this option are left, right, or any length (for example, 2f) meaning that much indent.

There is a corresponding indentvertical option for vertical indenting within the cell. It takes the same values except that left is renamed top, and right is renamed foot. A common problem with vertical placement is that words that lack ascenders (parts of letters that rise up) or descenders (parts that sink down) can easily become misaligned with words that don't. Looking at

resume poppy title

which is the result of

```
@Tbl
   aformat { @Cell A | @Cell B | @Cell C }
{
@Rowa
   A { resume }
   B { poppy }
   C { title }
}
```

we see that the words are aligned correctly despite the absence of ascenders from the first two words, and of descenders from the first and last; and this despite the fact that these words are vertically placed at the top of the cell. This is because by default @Tbl adds a *vertical strut* to each entry: an invisible object of zero width and height 1f, which covers for any absent ascenders and descenders. The option

```
@Cell strut { no }
```

can be used to remove the strut; other acceptable values for this option are yes (the default value), and any length, which will add a strut of that length.

For completeness there is a corresponding struthorizontal option; it takes the same values, its default value is no, and it unlikely ever to be used.

6.7. Rules

There is a rule option for drawing a rule around a cell:

```
@Cell rule { yes }
```

The other possible values are no (the default), single (the same as yes), and double, which draws a double rule.

There are rulehorizontal and rulevertical options which draw only horizontal or vertical rules, and also ruleabove, rulebelow, ruleleft, and ruleright options:

```
@Tbl
   aformat { @Cell A | @Cell B }
{
@Rowa
   ruleabove { yes }
   A { Commercial property }
   B { 10% }
@Rowa
   A { Stock market }
   B { 15% }
   rulebelow { yes }
}
```

produces

Commercial property	10%
Stock market	15%

These options take the same values as rule, but draw along only one or two of the four edges.

Other options control the appearance of rules. Here they are with their default values:

```
@Tbl
  rulewidth { 0.05f }
  rulegap { 0.15f }
  rulecolour { black }
```

These say that rules are to be 0.05f wide (thick), double rules are to appear 0.15f apart, and the colour of rules is to be black. Once again, more specific versions of these symbols exist for controlling above, below, left, and right rules:

rulehorizontalwidth	rulehorizontalgap	rulehorizontalcolour
ruleabovewidth	ruleabovegap	ruleabovecolour
rulebelowwidth	rulebelowgap	rulebelowcolour
ruleverticalwidth	ruleverticalgap	ruleverticalcolour
ruleleftwidth	ruleleftgap	ruleleftcolour
rulerightwidth	rulerightgap	rulerightcolour

As usual, all these options have abbreviated names; and colour may be spelt color wherever it appears. Section 6.14 has a complete summary of all spellings of all options.

To clarify exactly where the rules are drawn, let's start with a cell with no rules at all:

Above rules and left rules are drawn within the cell boundary, just touching it, with any above rule overstriking any left rule:

Below and right rules are drawn just outside the boundary of the cell, also touching it:

When a right rule is present, any above and below rules are extended by the width of the right rule, and they overstrike it:

(These diagrams were produced by @Tbl itself, using horizontal rules of width 0.8v drawn in black, and vertical rules of width 0.5v drawn in grey.) These arrangements ensure that even thick rules produce clean corners, and also that a right rule and a neighbouring left rule exactly overstrike each other, as do a below rule and its neighbouring above rule.

For information about rules in plain text tables, consult Section 6.12.

6.8. Spanning columns and rows

To make a cell span across several columns, precede the @Cell symbol with @StartHSpan and replace each spanned cell's @Cell symbol with @HSpan, like this:

```
@Tbl
   rule { yes }
   aformat { @StartHSpan @Cell indent { ctr } @B A | @HSpan | @HSpan }
   bformat { @Cell A | @Cell B | @Cell C }
{
@Rowa
   A { Some famous authors }
@Rowb
   A { Austen }
   B { Chaucer }
   C { Donne }
@Rowb
   A { Balzac }
   B { Darwin }
   C { Goethe }
}
```

The result of this is

Some famous authors		
Austen	Chaucer	Donne
Balzac	Darwin	Goethe

We've used a sample of options to show how naturally these go with spanning cells: they apply to the whole cell as usual, whatever its extent. It is quite acceptable to span just some of the columns, not all of them; indeed, there may be no @HSpan symbols at all, and then the cell just spans its own column, which sounds redundant but actually has a use (Section 6.10).

Spanning rows work in the same way; the spanning cell is preceded by @StartVSpan, and the spanned cells are replaced by @VSpan:

```
@Tbl
   rule { yes }
   aformat { @StartVSpan @Cell @I A | @Cell B | @Cell C }
   bformat { @VSpan | @Cell B | @Cell C }
{
@Rowa
   A { Mathematics }
   B { MATH 1001 }
   C { Differential Calculus }
@Rowb
   B { MATH 1002 }
   C { Linear Algebra }
@Rowa
   A { Computer Science }
   B { COMP 1001 }
   C { Introductory Programming }
@Rowb
   B { COMP 1002 }
   C { Introductory Computer Science }
}
```

The result of this is

Mathematics	MATH 1001	Differential Calculus
	MATH 1002	Linear Algebra
Computer Science	COMP 1001	Introductory Programming
	COMP 1002	Introductory Computer Science

Here is a notorious larger example, the ‘spiral’:

```
@QuotedDisplay @Tbl
   rule { yes }
{
@Row
   format { @StartVSpan @Cell A | @StartHSpan @Cell B | @HSpan }
   A { @SomeText }
   B { @SomeText }
@Row
   format { @VSpan | @Cell B | @StartVSpan @Cell C }
   B { @SomeText }
   C { @SomeText }
@Row
   format { @StartHSpan @Cell A | @HSpan | @VSpan }
   A { @SomeText }
}
```

The @SomeText symbol produces a short paragraph of text. The result is

<table>
<tr><td rowspan="3">Johnson suddenly uttered, in a strong determined tone, an apophegm, at which many will start: ‘Patriotism is the last refuge of a scoundrel.’</td><td colspan="2">Johnson suddenly uttered, in a strong determined tone, an apophegm, at which many will start: ‘Patriotism is the last refuge of a scoundrel.’</td></tr>
<tr><td>Johnson suddenly uttered, in a strong determined tone, an apophegm, at which many will start: ‘Patriotism is the last refuge of a scoundrel.’</td><td rowspan="2">Johnson suddenly uttered, in a strong determined tone, an apophegm, at which many will start: ‘Patriotism is the last refuge of a scoundrel.’</td></tr>
<tr><td colspan="2">Johnson suddenly uttered, in a strong determined tone, an apophegm, at which many will start: ‘Patriotism is the last refuge of a scoundrel.’</td></tr>
</table>

It is important when constructing mind-boggling tables like this one to ensure that every format has exactly the same number of | symbols. Otherwise the number of columns will differ from row to row. The names given to the entries (A, B, C, etc.) are quite irrelevant: having a @Cell D in one row and a @Cell D in another does not mean that the cells will appear in the same column.

There is an asymmetry in the spiral above: the first column occupies slightly more space than the other two. This arises because the left margin of the leftmost column is excluded from the calculation of how much space is available. This anomaly might be corrected some day.

There is a @StartHVSpan symbol which combines the effects of @StartHSpan and @StartVSpan. You need to use it in this arrangement:

```
@StartHVSpan   @HSpan   @HSpan
@VSpan
@VSpan
```

The blank positions should be left empty. For example:

```
@Tbl
   rule { yes }
   aformat { @Cell A | @Cell B | @Cell C | @Cell D }
   bformat { @Cell A | @StartHVSpan @Cell i { ctr } iv { ctr } B | @HSpan | @Cell D }
   cformat { @Cell A | @VSpan |      | @Cell D }
{
@Rowa
@Rowb
   B { CPU }
@Rowc
@Rowa
}
```

produces



This example illustrates how Lout apportions space in the presence of spanning columns. If the spanning cell is naturally narrower than the cells it spans, it is widened to their size. If it is wider (as in the example above), then the last spanned cell is widened to take up the slack. This is why the third cell is wider than the second in the first row of this example.

6.9. Multi-page tables

The tables produced by @Tbl permit page breaks (including breaking to a new column) between every two rows, except rows that have a vertically spanning cell in common. Page breaks cannot occur within rows. The choice of page breaks can either be left to Lout, or it can be forced by placing the new page symbol @NP between two rows.

Some care is needed over where to put multi-page tables. They can't go within any of the display symbols, because display symbols are not clever enough to break tables between rows, even though they are sometimes able to break simpler displays. (A display symbol will scale a very high table to fit on one page, and it will go wrong on a table containing @NP.) Multi-page tables can go inside @Figure or @Table symbols, because these symbols have been set up to accept multi-page objects. Or they can go into the body text of the document at full width with a paragraph symbol before and after, like this:

```
@DP
@Tbl ...
@DP
```

An example of this kind of multi-page table appears in Section 6.14. You can simulate an indent by means of an empty cell at the left of each row format, although in the author's opinion a multi-page table looks better at full width anyway. Lout will expand the rightmost column to the full page width; one way to prevent this is to add a | after the last cell within each format option, creating an empty extra column.

The simplest way to get rules right in multi-page tables is to set rulehorizontal to yes. This places a rule above every row including the first on each page, and a rule below every row including the last on each page.

To prevent page breaks within a table, precede the @Tbl symbol by @OneRow:

```
@CD @OneRow @Tbl ...
```

@OneRow is a general Lout symbol which binds the following object into a single, unbreakable row. Make sure your table is small enough to fit on one page when you do this, otherwise an error message will be printed and it will be scaled to fit. Of course, we have just said that display symbols like @CD do this anyway, but that might change some day.

To prevent a page break between two particular rows, but not in general, replace the @Row symbol of the second row with the corresponding @NoBreakRow symbol (@NoBreakRowa instead of @Rowa, @NoBreakRowb instead of @Rowb, and so on).

6.10. Aligned columns

Columns of numbers are often presented with decimal points aligned:

5.46
3.4159
5772

You can produce this by placing a ^ symbol, which is used generally throughout Lout for alignment, just before the alignment point in each entry:

```
@Tbl
   marginvertical { 0.5vx }
   aformat { @Cell A }
{
@Rowa A { 5^.46 }
@Rowa A { 3^.4159 }
@Rowa A { 5772^ }
}
```

The equals signs of equations can be aligned in the same way (see the example at the start of this chapter). Aligned cells should have no indent option.

Owing to problems behind the scenes, getting a heading over the top of an aligned column is a problem with no ideal solution. What most people want is for the heading to be centred in the column, and the aligned entries to be centred in the column as a block, but Lout cannot do this. One approximation is to make the heading cell a spanning cell with centring, like this:[1]

```
@Tbl
   marginvertical { 0.5vx }
   aformat { @StartHSpan @Cell indent { ctr } @B A | }
   bformat { @Cell A | }
{
@Rowa A { Heading }
@Rowb A { 5^.46 }
@Rowb A { 3^.4159 }
@Rowb A { 5772^ }
}
```

The spanning frees the heading from alignment, permitting indent { ctr } to work:

Heading
5.46
3.4159
5772

But if the heading cell is wider than the aligned cells, you get this:

[1] Lout does not currently accept single-column tables with @StartHSpan, so we've had to add an empty second column.

A Wider Heading
5.46
3.4159
5772

In other words, this will centre a heading with respect to aligned entries, but it will not centre aligned entries with respect to a heading. In these cases you could forget about @StartHSpan and treat the heading as an aligned entry, either by placing a ^ within it or by using

```
@Cell 0.5w @HShift A
```

which places the alignment point in the centre of the entry. You can move the alignment point about by changing the 0.5. Of course, all this is a poor substitute for the real thing.

6.11. Vertical alignment of tables

Occasionally the vertical alignment of a table with objects to its left and right becomes an issue. Examples are hard to find, but let's say that we need to construct a symbol

and include it in running text. The obvious first attempt at a table with three rows produces in running text, because vertical alignment is by default through the top boundary of the table. To make the alignment pass through one of the rows, replace its @Row symbol by a corresponding @MarkRow symbol. Here is the revised table, enclosed in a definition for ease of use:

```
import @TblSetup
def @AmberLight
{
   @OneRow @Tbl
      aformat { @Cell A }
      margin { 0i }
      strut { no }
      paint { no }  rule { no }
   {
      @Rowa A { @OpenCircle }
      @MarkRowa A { @ClosedCircle }
      @Rowa A { @OpenCircle }
   }
}
```

Now when we write

```
produces @AmberLight in running text
```

we find that this definition produces in running text, as desired. We have enclosed the table in @OneRow to ensure that its rows will never become separated, and added some options just in case the definition is ever used with a setup file (Section 6.13) that has default painting or rules.

6.12. Plain text tables

Tables work well with plain text output (Section 3.6):

```
.................................................
.                 .                             .
. Johnson         . Johnson suddenly uttered an   .
. suddenly        . apophegm, at which many will  .
. uttered an      . start:  ‘Patriotism is the    .
. apophegm, at    . last refuge of a scoundrel.’  .
. which many      .                               .
. will start:     .                               .
. ‘Patriotism     .................................
. is the last     .               .               .
. refuge of a     . Johnson       . Johnson       .
. scoundrel.’     . suddenly      . suddenly      .
.                 . uttered an    . uttered an    .
.                 . apophegm, at  . apophegm, at  .
.                 . which many    . which many    .
.                 . will start:   . will start:   .
.                 . ‘Patriotism   . ‘Patriotism   .
.                 . is the last   . is the last   .
.                 . refuge of a   . refuge of a   .
.                 . scoundrel.’   . scoundrel.’   .
.                 .               .               .
.                 .               .               .
.................................               .
.                                 .               .
. Johnson suddenly uttered an     .               .
. apophegm, at which many will    .               .
. start:  ‘Patriotism is the      .               .
. last refuge of a scoundrel.’    .               .
.                                 .               .
.                                 .               .
.................................................
```

This table was produced by a separate run of Lout and pasted into this document.

@Tbl changes the default values of several options when used in a plain text document:

```
@Tbl
  marginvertical { 2f }
  marginhorizontal { 2s }
  rulehorizontalwidth { 1f }
  ruleverticalwidth { 1s }
  rulehorizontalgap { 0f }
  ruleverticalgap { 0s }
```

When using plain text it is advisable to make vertical distances whole multiples of 1f, and horizontal distances whole multiples of 1s, since this avoids fractional spacing which cannot be successful in plain text files and produces quite messy results. There is also a ruleplainchar

option for changing the character used to draw rules. For example,

```
@Tbl
  ruleplainchar { - }
```

would be a good choice if you plan to draw only horizontal rules. This option can be set anywhere as usual.

If you do use rules it is worth pondering the implications of the last part of Section 6.7. Right and below rules are drawn outside the boundary of the cell, which is unimportant in ordinary output, but means that they will appear one space to the right and one line below the cell in plain text output. This explains the slight asymmetry in the example above; you can correct it with

```
@Tbl
  marginright { 1s }
  marginbelow { 1f }
```

but you still have to worry about rules at the extreme right of the page going off the edge, and rules below the last line bumping into whatever follows the table. The first can be fixed by not using full width tables with right rules; the second by inserting an extra @DP after a table that ends with a below rule.

6.13. Changing the overall format

All of the options apart from the format options can be changed in the tbl setup file, in which case the new values become the default values for every table in the document. This section explains how to do it. Changing options in the setup file can save a lot of time, but its more important purposes are to promote consistency and to allow document-wide formatting changes to be carried out easily.

The first step is to obtain your own copy of the setup file, tbl, from the Lout system include directory. You can find out where that is by typing

```
lout -V
```

This prints out various things about Lout. Supposing that it says that the Lout system include directory is /usr/lout/include, for example, you can copy the setup file into your current directory, renaming it mytbl, with the Unix command

```
cp  /usr/lout/include/tbl  mytbl
```

or its equivalent on your system. You will also need to make mytbl writable.

The next step is to replace the @SysInclude { tbl } line at the start of your document with @Include { mytbl }. This causes Lout to read your copy of the setup file, not the one in the system include directory. Since the two files are currently identical, this has changed nothing so far, but now you can change the options within mytbl and the changes will affect your document.

Your copy of the setup file has some lines beginning with # that are ignored by Lout, and then it has @SysInclude { tblf }. This line tells Lout to read file tblf which contains the definition

of the tbl package, so it should not be changed. After it comes the @TblSetup @Use clause, which looks like this:

```
@Use { @TblSetup
   # paint { nopaint }
   # font { }
   # break { }
}
```

Only a few of the options are shown here. To change a setup file option, delete the # in front of it and change the value. For example, suppose you want all table entries two points smaller than the surrounding text:

```
@Use { @TblSetup
   # paint { nopaint }
   font { -2p }
   # break { }
}
```

This relative specification of font size is available anywhere, not just in setup files (Section 1.6).

Some setup file options contain values which use the @OrIfPlain symbol:

```
marginvertical { 0.3f @OrIfPlain 1f }
```

This means that the value of marginvertical is to be 0.3f usually, but 1f in plain text documents. Feel free to leave these symbols there when you change a value, or delete them if you prefer.

6.14. Summary of options

This summary applies to all @Tbl options except the format options described in Section 6.3. Here is the complete list of these options, one option per line, showing its alternative spellings, default values (PostScript and PDF, and plain text) from the setup file, and allowed range of values. Where one option is indented below another, it means that the indented option is a specialized version of the other, which affects its default value. For more on this see below.

Option names	*Default in PS, PDF*	*Default in plain text*	*Allowed values*
paint p	nopaint		any colour from Section 8.1
background bg			any object
font f			any font e.g. Helvetica Slope -2p
break b			any break e.g. ragged nohyphen
width w			expand or any length e.g. 5c
height h			any length e.g. 3c
indent i			left, ctr, mctr, right, or any length
indentvertical iv			top, ctr, mctr, foot, or any length
strut s	yes	yes	no, yes, or any length
struthorizontal sh	no	no	no, yes, or any length

margin m			any length
marginhorizontal mh	0.6f	2s	any length
marginleft ml			any length
marginright mr			any length
marginvertical mv	0.3f	2f	any length
marginabove ma			any length
marginbelow mb			any length
rule r	no	no	no, yes, single, or double
rulehorizontal rh			no, yes, single, or double
ruleabove ra			no, yes, single, or double
rulebelow rb			no, yes, single, or double
rulevertical rv			no, yes, single, or double
ruleleft rl			no, yes, single, or double
ruleright rr			no, yes, single, or double
rulewidth rw	0.05f		any length
rulehorizontalwidth rhw		1f	any length
ruleabovewidth raw			any length
rulebelowwidth rbw			any length
ruleverticalwidth rvw		1s	any length
ruleleftwidth rlw			any length
rulerightwidth rrw			any length
rulegap rg	0.15f		any length
rulehorizontalgap rhg		0f	any length
ruleabovegap rag			any length
rulebelowgap rbg			any length
ruleverticalgap rvg		0s	any length
ruleleftgap rlg			any length
rulerightgap rrg			any length
rulecolour rulecolor rc	black		any colour from Section 8.1
rulehorizontalcolour rulehorizontalcolor rhc			any colour from Section 8.1
ruleabovecolour ruleabovecolor rac			any colour from Section 8.1
rulebelowcolour rulebelowcolor rbc			any colour from Section 8.1
ruleverticalcolour ruleverticalcolor rvc			any colour from Section 8.1
ruleleftcolour ruleleftcolor rlc			any colour from Section 8.1
rulerightcolour rulerightcolor rrc			any colour from Section 8.1
ruleplainchar rpc		.	any simple word e.g. +

There are seven places where these options may be given, counting the setup file (Section 6.13). To make it clear that this summary applies to any of these options, we illustrate the seven places with a fictitious option called option:

```
@Use { @TblSetup
   option { 1 }
}

@Tbl
   option { 2 }
   aoption { 3 }
   aformat { @Cell option { 4 } A }
{
   @Rowa
      option { 5 }
   @Row
      option { 6 }
      format { @Cell option { 7 } A }
}
```

Each occurrence of option is of course optional. If there are none, the default value given in the table above applies. For any other combination of absent and present options, the value that applies is the present and relevant one with the largest number in the illustration just above. But before applying this rule, any general options must be thought of as being replaced by their more specialized versions:

```
rulehorizontal { yes }
```

is equivalent to

```
ruleabove { yes }
rulebelow { yes }
```

for example. Conflicts are resolved in the logical way:

```
margin { 0.5f }
marginleft { 0.0f }
```

is equivalent to the four specialized options

```
marginabove { 0.5f }
marginbelow { 0.5f }
marginleft { 0.0f }
marginright { 0.5f }
```

General options are really just abbreviations for sets of specialized options.

Chapter 7. Equations

This chapter explains how to produce mathematical formulas in Lout, using the @Eq symbol like this:

```
@Eq { big int supp 1 on 0 ‘ dx over sqrt {1 - x sup 2} = pi over 2 }
```

This example produces

$$\int_0^1 \frac{dx}{\sqrt{1-x^2}} = \frac{\pi}{2}$$

The @Eq symbol looks after all the details of spacing for you, and it provides several hundred mathematical symbols.

7.1. Introduction

The Lout definitions for the @Eq symbol are accessed via a setup file called eq, which you must include at the start of your document if you want equations, like this:

```
@SysInclude { tbl }
@SysInclude { eq }
@SysInclude { doc }
@Doc @Text @Begin
...
@End @Text
```

This shows what to do if you want both tables and equations, but you may leave out the line for tables if you don’t want them. Setup files for specialized packages, such as like tab and eq, are best included before the main setup file, but may be included in any order.

With the eq file included, you may write

```
@Eq { ... }
```

at any point in your document, and the symbols of @Eq will be available between the braces. Any symbols available outside continue to be available inside, which means that equations may be freely mixed with other symbols, without restriction.

Equations may appear within a paragraph of text, or they may be displayed. @Eq’s job is to produce an object containing the equation; it neither knows nor cares where this equation goes.

To get an equation within a paragraph, simply place @Eq { ... } at the desired point. To make the optimal paragraph breaker work hard to arrange the paragraph so that the equation does not spread over two lines, use @OneCol @Eq { ... }. This is needed so frequently that a symbol @E is defined in eq along with @Eq which is an abbreviation for @OneCol @Eq.

To display an equation, use a display symbol like @IndentedDisplay or @CentredDisplay (Section 2.1). For example,

```
@CentredDisplay @Eq { int supp pi on 0 sin ‘ x = 0 }
```

produces

$$\int_0^{\pi} \sin x = 0$$

There are also symbols for aligned and numbered displays, which are very commonly used with equations. These symbols are the subject of Section 7.5.

In this chapter we show the Lout input at the left, and its result at the right:

```
@Eq { {x sup 2 + y sup 2} over 2 }
```

$$\frac{x^2 + y^2}{2}$$

Subsequent examples will omit the enclosing @Eq { ... }.

7.2. Symbols

@Eq prints characters in the fonts appropriate for mathematics:

```
x - 2
```

$x - 2$

Here *x* is in Italic, 2 is in Roman, and – is from the Symbol font. The character - is a *symbol* which stands for –, and 2 is also a symbol, standing for 2. @Eq includes a vast number of symbols:

```
Omega delta int partial club
```

$\Omega\delta\int\partial\clubsuit$

The summary at the end of this chapter has the complete list.

Symbols whose names are made from letters should be separated from each other by at least one space or end of line, as was done above, or else @Eq will become confused:

```
Omegadelta
```

Omegadelta

Symbols whose names are made from digits and punctuation characters can, however, be run together with each other and with symbols made from letters:

```
Omega-delta<=2
```

$\Omega - \delta \leq 2$

This rule applies throughout Lout (Section 1.3).

Some symbols join objects together in mathematical ways:

```
x sub 2
```

x_2

Here the sub symbol has taken the object just to its left, and the object just to its right, and joined them into one object in the form of a subscript. The two objects are called the left and right parameters of sub, and they may be arbitrary Lout objects.

Other symbols of a similar kind include sup for superscripting, over for built-up fractions, and from and to for the lower and upper limits of sums, products, etc. These symbols may be used together to produce complicated equations very easily:

```
big sum from i=0 to n r sup i
= {r sup n+1 - 1} over r-1
```

$$\sum_{i=0}^{n} r^i = \frac{r^{n+1} - 1}{r - 1}$$

Here sum is just the $\sum$ symbol; from and to do all the work of placing the limits. They are quite independent, so either or both may be omitted. To get a superscript directly over a subscript, use the supp and on symbols:

```
A supp b on a
```

$$A_a^b$$

These two symbols should always be used together as shown.

Sometimes a subscript appears to be too far to the right, owing to the slope of italic letters: in W_n, for example. You can fix this by using 'tucked' subscripts, like this:

```
W tsub n
```

$$W_n$$

```
W supp b ton a
```

$$W_a^b$$

The tsub and ton symbols are exactly like sub and on except for this tucking-in effect. However, the sub symbol itself does a certain amount of tucking in; the amount is determined by kerning information in the font files and so is sensitive to the shape of the letters.

As usual in Lout, braces are used to group something into an indivisible object. Leaving them out creates ambiguities:

```
a sup b over c
```

There are two possible interpretations for this:

```
{a sup b} over c
```

$$\frac{a^b}{c}$$

```
a sup {b over c}
```

$$a^{\frac{b}{c}}$$

@Eq chooses between them in the following way. Every symbol that takes a parameter also has a *precedence*, which is a number. For example, sup has precedence 60 and over has precedence 54. The symbol with the highest precedence wins the object lying between them, so in the above case the first interpretation is chosen. If two symbols of equal precedence compete for an object, the association is towards the left:

```
a sup b sub 2
```

$$a^b{}_2$$

In this case it is more probable that the following right association was actually wanted:

```
a sup { b sub 2 }
```

$$a^{b_2}$$

When in doubt, use braces to make the grouping clear.

White space between two objects is considered to be a symbol with precedence 7, which is lower than the precedence of any @Eq symbol; but if the two objects are immediately adjacent and neither is enclosed in braces the precedence is 102, which is higher than the precedence of any @Eq symbol. Compare these three examples:

big sum from i=0 to n $\sum_{i=0}^{n}$

big sum from {i = 0} to n $\sum_{i=0}^{n}$

big sum from i = 0 to n $\sum_{i} = \overset{n}{0}$

and you will see that some care is needed on this point. Braces can always be used to override precedence and associativity, and when in doubt the easiest course is to insert them. Although Lout allows symbols to associate towards the left or right, @Eq chooses to have only left associative symbols. The summary at the end of this chapter gives the precedence of every symbol.

The matrix symbol builds an array of objects:

```
matrix
  atleft { blpar }
  atright { brpar }
{
 row col x sup 2 col y sup 2 col z sup 2
 row col x col y col z
 row col 1 col 1 col 1
}
```

$$\begin{pmatrix} x^2 & y^2 & z^2 \\ x & y & z \\ 1 & 1 & 1 \end{pmatrix}$$

The atleft and atright options place vertically scaled versions of their values at each side; if either is omitted the value is taken to be an empty object of zero width by default. Although we have used blpar and brpar here, since the options are vertically scaled to the correct size some people prefer simply

```
matrix
  atleft { ( }
  atright { ) }
```

The right parameter of matrix is the array itself. It must be enclosed in braces, and it is a sequence of rows introduced by row symbols; each row is a sequence of objects introduced by col symbols.[1] The row and col symbols have low precedence, but not as low as white space between two objects. Therefore, unless the entries in the array are very simple, it is safest to enclose each of them in braces.

---

[1]Older versions of Lout use different symbols, above and nextcol, at this point. For backward compatibility these symbols are still available, but they are obsolete and no longer documented.

Entries built with the col symbol have their objects centred in the column. Also available are lcol for left-justified entries, ccol meaning the same as col, rcol for right-justified entries, and mcol for alignment along column marks. Each column may contain entries of different kinds, except that mcol does not work well with any other sort.

When several matrices appear side by side, slight differences in height can cause an unsightly appearance:

$$\begin{pmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{pmatrix} \begin{pmatrix} b_{11} & b_{12} \\ b_{21} & b_{22} \end{pmatrix} = \begin{pmatrix} c_{11} & c_{12} \\ c_{21} & c_{22} \end{pmatrix}$$

To assist in resolving this problem, the matrix symbol has a strut option, which causes a strut to be inserted into every row, guaranteeing that every row has height at least equal to the height of the strut. By using

```
matrix
   strut { Yes }
...
```

in each of the three matrices above, the result is improved to

$$\begin{pmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{pmatrix} \begin{pmatrix} b_{11} & b_{12} \\ b_{21} & b_{22} \end{pmatrix} = \begin{pmatrix} c_{11} & c_{12} \\ c_{21} & c_{22} \end{pmatrix}$$

By default, the strut has height 0.5f (half the current font size) both above and below the axis of the row. This can be changed by giving any length as the value of the strut option: strut { 2.0c } for two centimetres above and below the axis, and so on.

Some symbols have been added which produce 'matrices' with commonly needed atleft and atright options already set for you. Here are these symbols, on the left, with the equivalent matrix symbol and, on the right, the result produced:

pmatrix	matrix atleft { (} atright {) } { M }	(M)
bmatrix	matrix atleft { blbrack } atright { brbrack } { M }	$[M]$
brmatrix	matrix atleft { blbrace } atright { brbrace } { M }	$\{M\}$
fmatrix	matrix atleft { blfloor } atright { brfloor } { M }	$\lfloor M \rfloor$
cmatrix	matrix atleft { blceil } atright { brceil } { M }	$\lceil M \rceil$
amatrix	matrix atleft { blangle } atright { brangle } { M }	$\langle M \rangle$

For example:

fmatrix { (n+1) over 2 }

$$\left\lfloor \frac{(n+1)}{2} \right\rfloor$$

As this example shows, these symbols are very useful for getting large scaled delimiters around things that aren't necessarily matrices at all.

Each of the @Eq symbols that takes parameters also has a gap option, which controls the amount of space inserted by the symbol:

x over y $\frac{x}{y}$

x over gap { 3p } y $\frac{x}{y}$

@Eq usually gets the spacing right without help.

7.3. Vertical positioning

Every equation and every object within every equation has an *axis* running through it which is used to position it vertically with respect to nearby objects. In the Expert's Guide to Lout [5] this is called a *row mark*, but we'll stick with axis. Here are some examples with the axis shown as a dashed line:



When these objects are placed adjacent to one another, their axes are merged, giving the correct vertical positioning:



Most of the time you do not need to think about vertical positioning, because for most objects there is just one sensible place for the axis to go, and Lout puts it there.

Matrices and the delimiters that enclose them are the two exceptions. Lout makes the axis of a matrix pass through its exact centre, and it shifts the axes of delimiters so that they exactly enclose the thing delimited. These choices are never disastrous, but there are other possibilities that might be better sometimes.

The axis of a matrix could reasonably be set to the axis of any of its rows:



Alternatively, it could be set to where Lout usually places it, through the exact centre:



Delimiters could reasonably keep the axes that they naturally have (approximately through their centres, but not exactly):

$$- \left(\frac{1}{\sqrt{1 - 4x^2}} \right) -$$

or they could have their axes moved in the way that Lout usually does, to the point which allows them to evenly cover the thing delimited:

$$- \left(\frac{1}{\sqrt{1 - 4x^2}} \right) -$$

Altogether then there are four possibilities when these two alternatives interact:

	Matrix axis uses row axis	Matrix axis passes through centre
Delimiter keeps its axis	$- \left(\frac{1}{\sqrt{1 - 4x^2}} \right) -$	$- \left(\frac{1}{\sqrt{1 - 4x^2}} \right) -$
Delimiter axis shifted	$- \left(\frac{1}{\sqrt{1 - 4x^2}} \right) -$	$- \left(\frac{1}{\sqrt{1 - 4x^2}} \right) -$

To supply these possibilities, the matrix symbol and all its variants (pmatrix etc.) have two options whose values may be yes or no:

```
matrix
   userow { no }
   shiftdelim { yes }
{
   ...
}
```

The userow option determines whether the axis of the matrix will use a row axis; the default is not to, i.e. to centre the axis instead. The shiftdelim option determines whether the axis of the delimiter will be shifted so that the delimiter evenly covers the thing delimited; the default is to do this.

If userow is yes, the next question is which row's axis to use to make the overall axis. If you do nothing, the first (or only) row's axis becomes the overall axis. To select some other row instead, replace the row symbol that precedes the row by axisrow:

```
matrix userow { yes } {
   row       col { x sup 3 } col { y sup 3 } col { z sup 3 }
   axisrow   col { x sup 2 } col { y sup 2 } col { z sup 2 }
   row       col { x       } col { y       } col { z       }
}
```

The result of this is

$$\begin{matrix} x^3 & y^3 & z^3 \\ - x^2 - & - y^2 - & - z^2 - \\ x & y & z \end{matrix}$$

with the axis through the second row as desired.

7.4. Spacing

There is a basic rule governing the use of white space characters (space, tab, and newline) in the input to Lout: white space between two objects affects the result; white space between a symbol and its parameter does not. This is explained at length in Section 1.3.

Although this rule is just right most of the time, it is not adequate for equation formatting. Getting the horizontal spacing right in equations is a very fiddly business, involving four different sizes of space (zero, thin, medium, and thick), and different rules for spacing within superscripts and subscripts to those applying outside, according to a leading authority [6]. @Eq therefore takes the spacing decisions upon itself, and consequently chooses to ignore all white space in its input, even between two objects. (The simplest way to restore the effect of white space to part of an equation is to enclose that part in a @Font symbol.)

Every symbol provided by @Eq has a *full name*, which denotes the symbol without any space attached. Many symbols also have a *short name*, which denotes the same symbol with what @Eq considers to be an appropriate amount of space for that symbol attached to it. For example, ≤ has full name lessequal and short name <=:

a lessequal b	$a \leq b$
a <= b	$a \leq b$

@Eq puts a thick space around relation symbols like <=, a medium space around binary operator symbols like +, and a thin space after punctuation symbols (; and ,); except that in places where the symbols appear in a smaller size (superscripts, subscripts, etc.), these spaces are omitted. No other horizontal space is ever inserted.

The short names have been carefully designed to produce good-looking mathematics most of the time. It is best to rely on them in the first instance and only think about spacing when the result is not pleasing. In that case, @Eq's space can be removed by using the full names, and thin, medium and thick space can be added using the following symbols:

‘ 0.18f (0.018f in subscripts, etc.)
“ 0.24f (0.024f in subscripts, etc.)
“‘ 0.30f (0.030f in subscripts, etc.)

where 1f is the current font size. These symbols have low precedence. The & symbol from raw Lout is also available; the s unit has value 0 and so is not very useful, but one can write &2m for example for a two em space. The full names are tedious to remember, so @Eq provides a non symbol which removes spaces from its right parameter; thus non <= is equivalent to lessequal. There are also rel, bin, and punct symbols for telling @Eq to add space to the following symbol as though it was a relation symbol, binary operator, or punctuation symbol.

7.5. Displaying equations

The result of the @Eq symbol is an object which, according to the golden rule (Section 1.2), may appear anywhere: inside a paragraph, inside a table, and so on. In particular, equations are often displayed using the @CentredDisplay or @IndentedDisplay symbols from Section 2.1:

```
@IndentedDisplay @Eq { ... }
```

Now displayed equations are often numbered, and often aligned with one another on their equals signs. For this there are special display symbols which are the the subject of this section. These symbols can align and number any display at all, but since in practice they seem to be used only with equations, we discuss them here rather than in Section 2.1 where they really belong.

Let's begin by looking at a first example of a numbered display:

$$F_n = F_{n-1} + F_{n-2} \tag{7.5.1}$$

After the display we might have some more text for a while, and then we might want a second display, aligned on its equals sign with the first, and also numbered in sequence with it:

$$F_n - F_{n-1} = F_{n-2} \tag{7.5.2}$$

Notice that the two displays are centred as a block as well as aligned. Altogether there are four ways in which displays vary:

- A display can be raw or not raw (see below);
- It can be a @Display, @LeftDisplay, @IndentedDisplay, @QuotedDisplay, @CentredDisplay, @CenteredDisplay, or @RightDisplay;
- It can be aligned or not aligned;
- It can be numbered or not numbered.

All possible combinations are allowed. The display that has everything is called

```
@RawCentredAlignedNumberedDisplay
```

By leaving out some or all of Raw, Aligned, and Numbered, and by changing or leaving out Centred, we get all these combinations. Here then is how the two displays given earlier were made:

```
... a first example of a numbered display:
@BeginAlignedDisplays
@CentredAlignedNumberedDisplay
  @Tag { fibeq }
@Eq { F sub n ^= F sub { n-1 } + F sub { n-2 } }
After the display we might ... numbered in sequence with it:
@CentredAlignedNumberedDisplay @Eq { F sub n - F sub { n-1 } ^= F sub { n-2 } }
@EndAlignedDisplays
Notice that the two displays are centred ...
```

All numbered displays have an optional @Tag option which is used for cross referencing (see Section 2.8). Alignment and numbering work quite independently; they don't have to start or end together, and there can be non-aligned and non-numbered displays among the others.

When aligned displays are used, it is necessary to indicate where the aligned group begins and ends, by placing @BeginAlignedDisplays just before the first, and @EndAlignedDisplays just after the last. The alignment points are indicated by preceding them by the symbol ^, so you aren't restricted to aligning at equals signs. @BeginAlignedDisplays and @EndAlignedDisplays cannot span across several sections or subsections: the equations aligned by them must lie within a single large-scale structure symbol.

In our example of aligned and numbered displays, the two displays were separated by some ordinary text. Very often, though, aligned displays follow directly after each other. This is a problem, because if you have one display directly following another there will be too much vertical space between them. This problem was mentioned in Section 2.1, and the recommended solution was to use a list. However, there are no aligned or numbered (in this sense) lists.

To solve this problem, each display symbol has a 'raw' version, which means that no space is inserted above or below the display. Instead, you must insert it yourself using paragraph symbols:

```
preceding text
@DP
@RawAlignedDisplay @Eq { ... }
@DP
@RawAlignedNumberedDisplay @Eq { ... }
@DP
following text
```

You get the right spacing by placing @DP symbols before, between, and after each display; and you get to use the specialized displays that you need. Raw and non-raw displays may be numbered and aligned together.

Numbered displays are numbered automatically. Depending on where in the document they appear, the number might include a chapter number or section number, etc. This is controlled by options in the setup file; for example, setting @ChapterNumInDisplays to Yes ensures that numbered displays will be numbered afresh at the beginning of each chapter, and that the number will include a chapter number. There is also a @DisplayNumStyle option which controls the style of displays; the default value, (num), encloses the number in parentheses as is conventional when numbering equations.

Every display symbol has an abbreviated form consisting of @ followed by its capital letters only. For example, @BeginAlignedDisplays may be abbreviated to @BAD, and the display that has everything to @RCAND. Owing to an unfortunate clash between the initial letters of 'raw' and 'right', @RightDisplay and the other right displays have no abbreviations.

7.6. Defining new equation formatting symbols

Whenever you type particular equations or parts of equations repeatedly, you can save time by using definitions. Definitions are the subject of Section 2.12, so here we will just give a few

examples of their use in equation formatting.

Suppose for example that $p_i \log_2 p_i$ occurs frequently in your document. Then

```
def epi { p sub i ‘ log sub 2 ‘ p sub i }
```

makes the symbol epi stand for the object between the braces:

```
big sum from i=1 to n ‘ epi
```

$$\sum_{i=1}^{n} p_i \log_2 p_i$$

Parameters are very useful when parts of the symbol vary:

```
def ep
  right x
{ p sub x ‘ log sub 2 ‘ p sub x
}
```

The parameter x will be replaced by the object just to the right of ep:

```
big sum from i=1 to k ‘ ep i +
big sum from j=k+1 to n ep j
```

$$\sum_{i=1}^{k} p_i \log_2 p_i + \sum_{j=k+1}^{n} p_j \log_2 p_j$$

The precedence of the symbols you define will be 100 by default.

To make the symbols of @Eq available within such definitions, each must be preceded by import @Eq. As explained in Section 2.12, the definitions go into a file called mydefs, which might then look like this:

```
import @Eq
def epi { p sub i ‘ log sub 2 ‘ p sub i }

import @Eq
def ep right x { p sub x ‘ log sub 2 ‘ p sub x }
```

Use of epi and ep outside @Eq will cause an error.

7.7. Summary

This section is a complete list of the symbols provided by @Eq. We divide them into auxiliary, parameterized, short names (further divided into relations, binary operators, and punctuation), and full names. The auxiliary symbols are:

‘	Thin space
“	Medium space
“‘	Thick space
bin x	Treat x as a binary operator
rel x	Treat x as a relation
punct x	Treat x as a punctuation symbol
non x	Remove spaces normally put into x
vctr x	Centre x vertically
big x	Make x larger

Here are all the parameterized symbols, shown in groups of equal precedence, with the precedence itself at right:

matrix pmatrix bmatrix brmatrix fmatrix cmatrix amatrix not (100)
dot dotdot hat tilde vec dyad overbar underbar (62)
sup sub tsub supp (60) on ton (61)
from to widefrom wideto (58)
sqrt root (56)
over frac (54)
col lcol ccol rcol mcol (52)
row axisrow (50)

See Section 7.2 for examples of matrices. Here are some examples of the other symbols:

x dot	$\dot{x}$
x dotdot	$\ddot{x}$
x hat	$\hat{x}$
x tilde	$\tilde{x}$
x vec	$\vec{x}$
x dyad	$\overleftrightarrow{x}$
x+y overbar	$\overline{x+y}$
x+y underbar	$\underline{x+y}$

These marks are centred over the preceding object, except the last two which are extended to the width of the object.

a sup b	a^b
a sub b	a_b
W tsub b	W_b

a supp b on c a_c^b

W supp b ton c W_c^b

Note that supp and on (or ton) must be used together as shown; tsub and ton are exactly like sub and on except that the subscript is tucked in.

big sum from i $\sum_i$

big prod to j $\prod^j$

{a, ... , z} widefrom {90d @Rotate blbrace} $\underbrace{a, \ldots, z}$

{a, ... , z} wideto minus $\overline{a, \ldots, z}$

widefrom and wideto are like from and to except that they horizontally scale the right parameter to the width of the left.

sqrt {x over y} $\sqrt{\frac{x}{y}}$

3 root {x over y} $\sqrt[3]{\frac{x}{y}}$

The left parameter of root may be any object. Here are four ways to denote division:

2 over 3 $\frac{2}{3}$

2 frac 3 $^2\!/_3$

2 div 3 $2 \div 3$

2 slash 3 $2/3$

The div symbol is a binary operator (see below), and slash is the full name for the / character from the Adobe Symbol font. You can't use / itself, because it is one of Lout's special symbols.

The following short names define relations (that is, they have a thick space on each side):

<	$<$	>	$>$	=	$=$
<=	$\leq$	prec	$\prec$	preceq	$\preceq$
<<	$<<$	subset	$\subset$	subseteq	$\subseteq$
sqsubseteq	$\sqsubseteq$	in	$\in$	vdash	$\vdash$
smile	$\smile$	frown	$\frown$	>=	$\geq$
succ	$\succ$	succeq	$\succeq$	>>	$>>$
supset	$\supset$	supseteq	$\supseteq$	sqsupseteq	$\sqsupseteq$
ni	$\ni$	dashv	$\dashv$	mid	$\mid$

parallel	$\parallel$	==	$\equiv$	~	$\sim$
-~	$\simeq$	asymp	$\asymp$	~~	$\approx$
=~	$\cong$	bowtie	$\bowtie$	propto	$\propto$
models	$\models$	doteq	$\doteq$	perp	$\perp$
notsub	$\not\subset$	notin	$\notin$	!=	$\neq$
<->	$\leftrightarrow$	<--	$\leftarrow$	-->	$\rightarrow$
up	$\uparrow$	down	$\downarrow$	<=>	$\Leftrightarrow$
<==	$\Leftarrow$	==>	$\Rightarrow$	dblup	$\Uparrow$
dbldown	$\Downarrow$	:	:	::	: :
:=	:=				

These can be negated by preceding them with not, as in not ==, for example, which yields $\not\equiv$. The following short names define binary operators (medium space on each side):

+	+	-	$-$	+-	$\pm$
-+	$\mp$	setminus	$\setminus$	cdot	$\cdot$
times	$\times$	*	$*$	circ	$\circ$
div	$\div$	cap	$\cap$	cup	$\cup$
uplus	$\uplus$	sqcap	$\sqcap$	sqcup	$\sqcup$
triangleleft	$\triangleleft$	triangleright	$\triangleright$	wr	$\wr$
bigcirc	$\bigcirc$	bigtriangleup	$\bigtriangleup$	bigtriangledown	$\bigtriangledown$
vee	$\vee$	wedge	$\wedge$	oplus	$\oplus$
ominus	$\ominus$	otimes	$\otimes$	oslash	$\oslash$
odot	$\odot$	dagger	$\dagger$	daggerdbl	$\ddagger$
amalg	$\amalg$				

The following names define arrow symbols (no extra space):

leftarrow	$\leftarrow$	longleftarrow	$\longleftarrow$	dblleftarrow	$\Leftarrow$
dbllongleftarrow	$\Longleftarrow$	rightarrow	$\rightarrow$	longrightarrow	$\longrightarrow$
dblrightarrow	$\Rightarrow$	dbllongrightarrow	$\Longrightarrow$	leftrightarrow	$\leftrightarrow$
longleftrightarrow	$\longleftrightarrow$	dblleftrightarrow	$\Leftrightarrow$	dbllongleftrightarrow	$\Longleftrightarrow$
mapsto	$\mapsto$	longmapsto	$\longmapsto$	hookleftarrow	$\hookleftarrow$
hookrightarrow	$\hookrightarrow$	leadsto	$\leadsto$	leftharpoonup	$\leftharpoonup$
rightharpoonup	$\rightharpoonup$	leftharpoondown	$\leftharpoondown$	rightharpoondown	$\rightharpoondown$
rightleftharpoons	$\rightleftharpoons$	uparrow	$\uparrow$	dbluparrow	$\Uparrow$
downarrow	$\downarrow$	dbldownarrow	$\Downarrow$	updownarrow	$\updownarrow$
dblupdownarrow	$\Updownarrow$	nearrow	$\nearrow$	searrow	$\searrow$
swarrow	$\swarrow$	nwarrow	$\nwarrow$		

The following names define punctuation symbols (thin space on the right-hand side):

;	;	,	,	col	:

The following symbols are used in ways typified by the large sum and product symbols. In display equations they should be preceded by the big symbol:

sum	$\sum$	prod	$\prod$	coprod	$\coprod$

int	$\int$	oint	$\oint$	bcap	$\cap$
bcup	$\cup$	bvee	$\vee$	bwedge	$\wedge$
bodot	$\odot$	botimes	$\otimes$	boplus	$\oplus$
buplus	$\uplus$				

The following symbols are defined so that they will appear in Roman, as is conventional for them in equations:

arccos	arccos	arcsin	arcsin	arctan	arctan
arg	arg	cos	cos	cosh	cosh
cot	cot	coth	coth	csc	csc
deg	deg	det	det	dim	dim
exp	exp	gcd	gcd	hom	hom
inf	inf	ker	ker	lg	lg
lim	lim	liminf	lim inf	limsup	lim sup
ln	ln	log	log	max	max
min	min	Pr	Pr	sec	sec
sin	sin	sinh	sinh	supr	sup
tan	tan	tanh	tanh	mod	mod

The following symbols are also defined to ensure that they will appear in Roman:

0	0	1	1	2	2
3	3	4	4	5	5
6	6	7	7	8	8
9	9	!	!	?	?
%	%	(	(	)	)
[	[	]	]		

The following symbols make good atleft and atright parameters of the matrix symbol:

lpar	$($	blpar	$\left($	rpar	$)$
brpar	$\right)$	lbrack	$[$	blbrack	$\left[$
rbrack	$]$	brbrack	$\right]$	lbrace	$\{$
blbrace	$\left\{$	rbrace	$\}$	brbrace	$\right\}$
lfloor	$\lfloor$	blfloor	$\left\lfloor$	rfloor	$\rfloor$

brfloor	$\rfloor$	lceil	$\lceil$	blceil	$\lceil$
rceil	$\rceil$	brceil	$\rceil$	langle	$\langle$
blangle	$\langle$	rangle	$\rangle$	brangle	$\rangle$

Here are some miscellaneous symbols:

hbar	$\hbar$	Re	$\Re$	Im	$\Im$
partial	∂	infty	∞	prime	$'$
nabla	∇	surd	$\surd$	top	$\top$
bot	$\bot$	dbar	$\|\|$	triangle	$\triangle$
backslash	$\backslash$	forall	$\forall$	exists	$\exists$
neg	$\neg$	circle	$\bigcirc$	square	$\square$
ldots	$\ldots$	cdots	$\cdots$	vdots	$\vdots$
ddots	$\ddots$	del	∇	grad	∇
...	$\ldots$	,...,	$,\ldots,$	half	$1/2$
third	$1/3$	'	$'$	empty	$\varnothing$

Finally, here is the long list of full names from the Adobe Symbol font; these are the same characters as you get with the @Sym symbol of Section 1.4, but within equations you don't need to type @Sym:

space		exclam	!	universal	$\forall$
numbersign	#	existential	$\exists$	percent	%
ampersand	&	suchthat	$\ni$	parenleft	(
parenright	)	asteriskmath	$*$	plus	+
comma	,	minus	$-$	period	.
slash	/	zero	0	one	1
two	2	three	3	four	4
five	5	six	6	seven	7
eight	8	nine	9	colon	:
semicolon	;	less	<	equal	=
greater	>	question	?	congruent	$\cong$
Alpha	A	Beta	B	Chi	X
Delta	Δ	Epsilon	E	Phi	Φ
Gamma	Γ	Eta	H	Iota	I
thetaone	ϑ	Kappa	K	Lambda	Λ
Mu	M	Nu	N	Omicron	O
Pi	Π	Theta	Θ	Rho	P
Sigma	Σ	Tau	T	Upsilon	Y
sigmaone	ς	Omega	Ω	Xi	Ξ
Psi	Ψ	Zeta	Z	bracketleft	[

therefore	∴	bracketright	]_	perpendicular	⊥
underscore	_	radicalex		alpha	α
beta	β	chi	χ	delta	δ
epsilon	ε	phi	ϕ	gamma	γ
eta	η	iota	ι	phione	φ
kappa	κ	lambda	λ	mu	μ
nu	ν	omicron	ο	pi	π
theta	θ	rho	ρ	sigma	σ
tau	τ	upsilon	υ	omegaone	ϖ
omega	ω	xi	ξ	psi	ψ
zeta	ζ	braceleft	{	bar	|
braceright	}	similar	~	Upsilonone	ϒ
minute	′	lessequal	≤	fraction	⁄
infinity	∞	florin	ƒ	club	♣
diamond	♦	heart	♥	spade	♠
arrowboth	↔	arrowleft	←	arrowup	↑
arrowright	→	arrowdown	↓	degree	°
plusminus	±	second	″	greaterequal	≥
multiply	×	proportional	∝	partialdiff	∂
bullet	•	divide	÷	notequal	≠
equivalence	≡	approxequal	≈	ellipsis	…
arrowvertex	⏐	arrowhorizex	⎯	carriagereturn	↵
aleph	ℵ	Ifraktur	ℑ	Rfraktur	ℜ
weierstrass	℘	circlemultiply	⊗	circleplus	⊕
emptyset	∅	intersection	∩	union	∪
propersuperset	⊃	reflexsuperset	⊇	notsubset	⊄
propersubset	⊂	reflexsubset	⊆	element	∈
notelement	∉	angle	∠	gradient	∇
registerserif		copyrightserif	©	trademarkserif	™
product	∏	radical	√	dotmath	·
logicalnot	¬	logicaland	∧	logicalor	∨
arrowdblboth	⇔	arrowdblleft	⇐	arrowdblup	⇑
arrowdblright	⇒	arrowdbldown	⇓	lozenge	◊
angleleft	⟨	registersans		copyrightsans	©
trademarksans	™	summation	∑	parenlefttp	⎛
parenleftex	⎜	parenleftbt	⎝	bracketlefttp	⎡
bracketleftex	⎢	bracketleftbt	⎣	braceleftp	⎧
braceleftmid	⎨	braceleftbt		braceex	⎪
angleright	⟩	integral	∫	integraltp	⌠
integralex	⎮	integralbt	⌡	parenrighttp	⎞
parenrightex	⎟	parenrightbt	⎠	bracketrighttp	⎤
bracketrightex	⎥	bracketrightbt	⎦	bracerighttp	⎫
bracerightmid	⎬	bracerightbt	⎭		

The names given are the same as Adobe's, as used by the @Sym symbol, except in a few places where the Adobe name contains a digit, which is not possible for a symbol name in Lout.

7.8. An alternative version that uses TEX's fonts

There is an alternative version of the @Eq symbol that uses fonts taken from the TEX document formatting system. These fonts are said to produce better-looking mathematics than the Adobe Systems Symbol font used by the standard @Eq symbol.

The fonts were converted from TEX form to PostScript form by Basil K. Malyshev, who has attached a license to them permitting non-commercial use only. This is a much more stringent license than the one attached to Lout itself. For this reason, the files needed to use these TEX fonts are distributed separately from the rest of Lout, although you can get them from the same place (see the preface of this guide).

Once these files are installed, you change from the standard @Eq symbol to the TEX version by changing the initial @SysInclude { eq } to @SysInclude { teq }. Do absolutely nothing else.

Unfortunately, the TEX fonts are not usually resident on PostScript printing devices, which means that Lout is obliged to include them in its PostScript output file. You don't have to do anything to make this happen, but the cost is fairly large: changing to @SysInclude { teq } increases the size of the PostScript output file by 252 kilobytes.

It is possible to gain access to characters in the TEX fonts that are not accessible directly from @Eq, mainly script capitals and bold-italic Greek letters. For example, you can use {cmsy Base} @Font @Char "A" to get a script A, and {cmmi Bold} @Font @Char "pi" to get a bold-italic π. For the full story, consult file teq in the Lout system include directory for the names of these fonts, and then look in Lout's font directory for their font metrics files, which show the names and encodings of all the characters.

Chapter 8. Basic Graphics

This chapter introduces some basic graphics symbols for colour, rotation, scaling, and included illustrations. These are all from the standard BasicLayout package, so no @SysInclude line is needed to get them.

8.1. Colour

Colour is obtained in much the same way that fonts and language changes are, using the @Colour (or equivalently @Color) symbol:

```
grey  @Colour  { Hello, world }
```

produces

Hello, world

The @Colour symbol will accept any of the following colours:

darkred	red	lightred
darkgreen	green	lightgreen
darkblue	blue	lightblue
darkcyan	cyan	lightcyan
darkmagenta	magenta	lightmagenta
darkyellow	yellow	lightyellow
darkgrey	grey	lightgrey
darkgray	gray	lightgray
black	white	

Monochrome output devices will render them as shades of grey. Colouring something white makes it invisible, which is sometimes useful.

In addition to the list of colours given above, there is a special colour called nochange which produces the colour you already happen to be using.

Whether or not the colours produced by @Colour actually correspond with the names depends on the output device; the same nominal colour can look quite different on screen and on paper. The standard Lout @SetColour symbol can provide many more colours [5], although they must be specified using numbers rather than names.

8.2. Boxes and rules

The @Box symbol causes the following object to be enclosed in a box:

```
@QuotedDisplay @Box {
@CentredDisplay @Heading Cheating
The Department uses assignments ... of that student alone.
}
```

The result of this is

Cheating

The Department uses assignments both as a teaching device and as a major component of its assessment of each student. It therefore requires that all programs, exercises etc. handed in bearing an individual student's name be the work of that student alone.

showing that a box may enclose an arbitrarily complicated object.

The @Box symbol has a margin option which determines the margin between the box and what it encloses. For example,

```
@Box
   margin { 0.1c }
{}
```

requests a box with a 0.1 centimetre margin enclosing an empty object, so the result is a square whose width and height are 0.2 centimetres:

□

If the margin option is omitted, it is assigned the default value 0.3f, which means 0.3 times the current font size. It is very useful to tie the margin to the font size in this way, because large headings (in overhead transparencies, say) need large margins.

There is a linewidth option which determines the width (thickness) of the line drawn around the boundary of the box:

```
@Box
   linewidth { 0.1c }
{ Hello world }
```

produces

Hello world

Lout does not take the line width into account when working out how large everything is: as far as Lout is concerned, the line always has width zero. If you draw really thick lines you might need a larger margin and more space near the box. The default value of linewidth is empty, which means to use whatever width the PostScript interpreter in your output device thinks is a good

default value.

There is also a paint option which paints a background of the nominated colour:

```
@Box paint { grey } WARNING!
```

has result

WARNING!

This is quite different from grey @Colour @Box WARNING!, which produces

WARNING!

The paint option may be given any colour from the list in Section 8.1; its default value is none, which is a special value (not a colour) which means no painting. White paint comes into its own inside painted boxes:

```
@Box paint { nochange } white @Colour { Hello world }
```

produces a box painted in whatever colour we happen to be using at the moment, with white text inside:

Hello world

This works because the box is painted before the object it encloses is drawn on the page.

There are @CurveBox and @ShadowBox symbols that produce other kinds of boxes:

A curve box A shadow box

These also have margin and paint options, and @ShadowBox has a shadow option which determines the thickness of the shadow (its default value is 0.2f).

Boxes are quite at home inside paragraphs, as a box, a curve box, and a shadow box show. Simply proceed as usual:

```
... paragraphs, as @Box { a box }, @CurveBox { a curve box }, ...
```

Boxes within paragraphs are never broken across two lines.

There are two symbols for producing horizontal rules. @FullWidthRule produces a rule which occupies the full page (or column) width:

More precisely, the rule occupies as much horizontal space as it legally can. @FullWidthRule produces an object in the usual way, so you will need paragraph or display symbols to separate it from preceding and following things.

A variant called @LocalWidthRule is more timid about zooming across the whole page:

```
@OddPageTop { { My lovely document @LP @LocalWidthRule } @Right @PageNum }
```

will draw a rule under just the three words. Of course, underlining using the @Underline symbol might be a better way to do this. Both symbols have a linewidth option which works like the one for boxes described above. In particular, Lout leaves zero space for the line, no matter how wide you make it.

8.3. Rotation

The @Rotate symbol rotates the following object by any positive or negative angle, measured in degrees:

```
45d @Rotate @Box WARNING!
```

has result

As usual, the object to be rotated may be arbitrary. However, it is difficult for Lout to choose appropriate column widths for paragraphs inside rotated objects, so if a rotated object contains paragraphs that should be broken it is best to define the object's width explicitly, using the @Wide symbol:

```
-90d @Rotate 4.5c @Wide {
Papal initiatives and influence from the crowning of
Charlemagne to the First Crusade
}
```

The result here is

Papal initiatives and influence from the crowning of Charlemagne to the First Crusade

The @Wide symbol fixes the width of the following object, in this example to the length 4.5 centimetres, which is all Lout needs to decide the column widths of any paragraphs within it.

8.4. Scaling

The @Scale symbol performs a geometrical scaling of the following object:

```
0.5 @Scale @Box WARNING!
```

produces

A scale factor of 0.5 means half the original size, 2.0 means double size, and so on. No unit of measurement appears in the scale factor, because it makes no sense to have one. As usual, the object to be scaled may be arbitrary.

It is also possible to supply two scale factors, in which case the first is applied horizontally and the second vertically:

```
{0.5 2.0} @Scale @Box WARNING!
```

has result

Practical uses for this kind of scaling are rare.

If an empty object is given instead of a scale factor, like this:

```
{} @Scale @Box WARNING!
```

the @Scale symbol will choose the largest scale factor that does not overrun the available horizontal space. It is often possible to omit the {}, since Lout inserts an empty object automatically whenever an object is clearly missing (see Section 1.2). For example,

```
@QuotedDisplay @Scale @Box WARNING!
```

produces

@QuotedDisplay and @LeftDisplay go well with this form of @Scale. However, some care is needed because Lout foolishly takes no account of the available *vertical* space when choosing the scale factor. The chosen scale factor could enlarge the vertical size so much that the object no longer fits on the page, with disastrous results.

By using a @Wide symbol to restrict the available horizontal space, this form of scaling can also be used to scale to a nominated width. For example,

```
5c @Wide @Scale @Box WARNING!
```

produces

WARNING!

which is 5 centimetres wide.

8.5. Including an illustration

The @IncludeGraphic symbol incorporates into a Lout document an illustration (that is, an encapsulated PostScript or EPS file) produced by other means. For the opposite process, using Lout to produce an illustration for inclusion in some other document, see Section 3.5.

For example, suppose the encapsulated PostScript file su_crest.eps contains the University of Sydney crest. Then

```
@IncludeGraphic su_crest.eps
```

produces

In general, the result produced by @IncludeGraphic is an object that may be scaled, rotated, made into a display or placed within a paragraph, just like any other object. Accolades for this remarkable flexibility should go to the PostScript page description language, whose extraordinary power makes the provision of this feature in Lout almost trivial.

The @IncludeGraphic command understands that files ending with any of the suffixes .gz, -gz, .z, -z, _z, and .Z are compressed files, and it will uncompress such files using the gunzip command before including them. The uncompressed version is stored in a file called lout.eps in the current directory, and removed after being copied into the output file.

If you place an included illustration in a line of text, or anywhere where you care about its alignment with things on either side of it, it will be positioned with its centre at the same height as the centre of the letter x. If this is not where you want it, use the @VShift symbol:

```
... +0.5f @VShift @IncludeGraphic ...
```

prints the illustration half of the current font size higher on the page than would otherwise have been the case, and

```
... -0.5f @VShift @IncludeGraphic ...
```

prints it half the current font size lower. Any length (Section 1.2) is allowed, and the object following @VShift may in fact be arbitrary as usual.

Chapter 9. Diagrams

This chapter describes how to use the @Diag symbol[1] to make diagrams like this one:



@Diag offers nodes and links, arrows, labels, positioning using coordinates, and tree diagrams.

9.1. Introduction

To use the @Diag symbol you first need to include its setup file. For example, suppose you have an ordinary document with tables:

```
@SysInclude { tbl }
@SysInclude { doc }
@Doc @Text @Begin
...
@End @Text
```

Change this to

```
@SysInclude { tbl }
@SysInclude { diag }
@SysInclude { doc }
@Doc @Text @Begin
...
@End @Text
```

This provides everything you need for making diagrams.

The result of the @Diag symbol is an object in the usual way. A diagram is commonly made into a centred display, like this:

```
@CentredDisplay @Diag {
    ...
}
```

[1]Prior to Version 3.09 of Lout, this chapter described a symbol called @Fig which was similar to but more primitive than @Diag. For backward compatibility the @Fig symbol is still available and still works exactly as described in the old documentation, but there is no reason to use it in new documents.

or into a floating figure, like this:

```
@Figure
   @Caption { ... }
@Diag {
   ...
}
```

but it could be an entry in a table, a word in a paragraph, or anything else.

Most uses of @Diag contain a *nodes part* and a *links part*:

```
@Diag {
   nodes part
   //
   links part
}
```

This reflects @Diag's view of the world as consisting of *nodes* (circles, squares, and so on), which have to be put in their right places and then joined with *links* (lines, arrows). The technical meaning of the // symbol does not concern us here; it simply serves to divide the two parts.

For example, here is a nodes part containing two nodes separated by a @DP symbol that (as usual) leaves some vertical space between them:

```
@Ellipse { Hello, world }
@DP
@Square @I x
```



Node symbols like @Ellipse and @Square follow a familiar pattern: they consume the following object, which may be arbitrary, draw a shape around it, and give back the resulting object. To insert links, the nodes must first be given names, called *tags*, using the :: symbol:

```
A:: @Ellipse { Hello, world }
@DP
B:: @Square @I x
```

Then a link from A to B may be added to the links part:

```
@Diag {
   A:: @Ellipse { Hello, world }
   @DP
   B:: @Square @I x
   //
   @Link from { A } to { B }
}
```



Subsequent examples will often omit the enclosing @Diag { }.

9.2. Nodes

@Diag has one basic symbol for creating nodes. It is called @Node, and it takes the following object and encloses it in an outline whose shape is determined by the outline option:

```
@Node
   outline { curvebox }
{ Hello, world }
```



As Section 9.9 explains, the outline option may be used to produce an outline of any shape. There are also nine values that produce standard shapes: box, curvebox, shadowbox, square, diamond, polygon, isosceles, ellipse, and circle.

The shape of the outline is determined by the outline option, but its size and position depend on the size and position of its *base*: the following object with a small margin around it. For example, this is how a circle is positioned over its base (shown in grey):

```
@Node
   outline { circle }
{ Hello, world }
```



Lout works only with the base, having no idea where the outline is, which explains why this circle is too high for the space allowed it. Section 9.11 shows how each of the standard outlines is positioned over its base.

The @Node symbol has many options, but all of them without exception share the following very useful property: they may be given to the @Diag symbol as well, where they apply to every node in the diagram:

```
@Diag
   outline { circle }
{
   @Node @I a
   @DP
   @Node @I b
}
```



These options also appear in the setup file (diag); if set there, they apply to every node in every diagram of the document. As the number of nodes increases, it becomes very tedious and error-prone to duplicate options at all the nodes. Giving each option just once, at the @Diag symbol or in the setup file, saves time and makes it easy to change all the nodes into squares or any other shape later on. Any setup file option may be overridden in a diagram by giving the option to its @Diag symbol; any @Diag option or setup file option may be overridden at any node by giving the option again there.

To save time in simple cases, @Diag provides nine other node symbols called @Box, @CurveBox, @ShadowBox, @Square, @Diamond, @Polygon, @Isosceles, @Ellipse, and @Circle. These are just abbreviations for @Node with the appropriate value of outline, nothing more. They take the same options as @Node (except that outline is already fixed), and everything works in the same way.

There is a shadow option which determines the depth of the shadow in shadow boxes:

```
@Node
   outline { shadowbox }
   shadow { 0.4f }
{ WARNING }
```

This example shows the default value, 0.4 times the current font size. For polygons there is a sides option for specifying the number of sides, and an angle option for rotating the outline:

```
@Polygon
  sides { 5 }
```



```
@Polygon
  sides { 5 }
  angle { 0d }
```



Setting angle to 0d causes the first vertex to be placed directly underneath the centre, and as the angle increases, the position of the first vertex rotates anticlockwise. The defaults are 3 sides and the angle that gives the polygon a horizontal base (i.e. 180 degrees divided by the number of sides). Thus the two cases with symmetry about a vertical axis are obtained by the default angle and 0d respectively, which is convenient. The shadow, sides, and angle options may be given to any node, and also to @Diag and in the setup file, where they apply to every node as usual. However, they only affect the appearance of shadow boxes and polygons, respectively.

The outlinestyle, outlinedashlength, and outlinewidth options apply to any node and affect the appearance of the outline:

```
@CurveBox
  outlinestyle { solid }
  outlinedashlength { 0.2f }
  outlinewidth { thin }
{ Hello, world }
```



This example shows the default values of these options. The outlinestyle option may be solid, dashed, cdashed, dotted, or noline:

```
@CurveBox
  outlinestyle { cdashed }
{ Hello, world }
```



The dashed option makes all dashes the same length, whereas cdashed halves the length of the first and last dash on each segment, which usually looks better. The length of dashes is outlinedashlength, and the distance between dashes or dots is at most outlinedashlength, reduced to make the dashes or dots fit evenly. The outlinewidth option determines the width of the line, dashes, or dots, and may be thin, medium, thick, or any length. The values used for thin, medium, and thick are 0.04f, 0.08f, and 0.12f.

The outlinestyle option may contain a sequence of the values mentioned above, meaning

that they are to be applied in turn to each segment of the outline:

```
@CurveBox
  outlinestyle { solid cdashed }
{ Hello, world }
```



If there are more segments than values, outlinestyle cycles back to the first value again; this is why a single value is applied to all segments. Section 9.11 shows how each of the standard shapes is divided into segments.

Nodes may be painted any of the colours listed in Section 8.1, using the paint option:

```
@Box
  paint { grey }
@Diamond
  outlinestyle { noline }
  paint { white }
{ Hello, world }
```

In this example the object following @Box is a diamond containing Hello, world. The default value of paint is nopaint, a special value (not a colour) meaning don't use any paint.

When painting it is important to know what order things are done in, because anything put down earlier will disappear under the paint. This is why nopaint and white are different. Painting is done first, then boundaries, and finally the following object.

Each node symbol has font and break options which may be used to set the font and paragraph breaking style of the following object:

```
@Box
   font { Helvetica Base }
   break { clines }
{
WARNING
DANGEROUS
PENGUINS
}
```



Both options have empty default values, which leave the font and break style unchanged. There is also a format option for making more radical changes to the appearance of the following object:

```
@Box
   format {
      {0.8 1.5} @Scale @S @Body
   }
{
Dangerous Penguins
}
```

The result is the format option with any @Body symbol within it replaced by the following

object. These are very useful when attached to the @Diag symbol:

```
@Diag
   font { Helvetica Base }
   break { clines }
   format { { 0.8 1.5 } @Scale @S @Body }
{
   ...
}
```

since then they apply to every node, as usual, thereby eliminating a lot of tedious, error-prone duplication of formatting information at each node.

The margin option determines the size of the margin added to the following object:

```
@Box
   margin { 0c }
{ Hello, world }
```



These margins are included in the node's base (described above), so a larger margin enlarges the base and hence the outline as well. The default value of margin is 0.6f (six-tenths of the current font size), and so the margin will automatically increase when the font size does, for example in overhead transparencies.

The margin option adds the same margin to all four sides. For finer control, the hmargin option determines the horizontal (left and right) margins only, overriding margin. Similarly, the vmargin option determines the vertical (top and foot) margins. There are also leftmargin, rightmargin, topmargin, and footmargin options which override margin, hmargin, and vmargin.

When nodes appear side by side, the valign option is useful for controlling their vertical position with respect to each other. For example,

```
@Diag
   valign { foot }
{
@Box font { 24p } Big
@Box font { 8p } Small
}
```



causes the feet of the boxes to be aligned. In this example it is applied to all nodes at once, but of course it can be applied to individual nodes as well. The value of valign can be a length, which means that the point of alignment is to be that far down from the top of the base (including margins); or it may be top, ctr, or foot, meaning alignment through the top, centre (the default value), or foot.

The vsize option specifies a particular height for a node (not including margins):

```
@Diag
   vsize { 2f }
{
@Box font { 24p } Big
@Box font { 8p } Small
}
```

The font size used when calculating vsize is not affected by the value of any font option. If the following object is too tall for the chosen height, Lout will print a warning message ('forced to enlarge @High', probably) and enlarge the base.

There is a vindent option which is effective only when vsize is used. It controls where in the vertical space the following object is to appear:

```
@Diag
   vsize { 3f }
{
@Box vindent { top } Top
@Box Centre
@Box vindent { foot } Foot
}
```



The value may be top for at the top, ctr (the default value) for in the centre, foot for at the foot, or a length, meaning that distance down from the top. These values are the same as for the valign option.

Small discrepancies in the size of nodes can be very annoying, particularly when the nodes appear side by side:

```
@Diag
{
@Box Hole @Box in
@Box my @Box pocket
}
```



These are caused by the slightly different heights of the objects within the nodes. Selecting a fixed vertical size for all nodes goes some way towards solving this problem:

```
@Diag
   vsize { 1f }
{
@Box Hole @Box in
@Box my @Box pocket
}
```



The size 1f is a good choice because most fonts are designed to be 1f high from the top of the tallest character to the foot of the deepest. However, there is still a problem with the baselines of the words being misaligned. A better solution is to insert a *vertical strut* into each node: an invisible object with zero width and height equal to 1f. This is done using the vstrut option:

```
@Diag
   vstrut { yes }
{
@Box Hole @Box in
@Box my @Box pocket
}
```



The vstrut option may be yes, no (the default value), or a length, meaning to insert a strut of this height. So vstrut { yes } is equivalent to vstrut { 1.0f }.

There are halign, hsize, hindent, and hstrut options which work horizontally exactly as valign, vsize, vindent, and vstrut work vertically, except that they use left and right where the vertical ones use top and foot. The best way to fix horizontal size discrepancies is with hsize, not hstrut.

9.3. Links

@Diag has one basic symbol for creating links, called @Link. It draws a link between two points or nodes given by from and to options, along a path given by a path option:

```
@Link
   path { ... }
   from { ... }
   to { ... }
```

Unlike @Node, @Link has no following object.

The path option may be used to produce a link of any shape, as Section 9.9 explains. There are also values that produce standard paths. These are listed in full in the summary (Section 9.11); here is a sample:

path { line }



path { acurve }



path { ccurve }



path { rvlcurve }



The name of the last one is a reminder that it goes right, then vertically, then left, with curved corners. The acurve and ccurve values produce circular arcs, anticlockwise and clockwise respectively, lying on the circle passing through the endpoints, or through the centres of the endpoints when they are tags denoting nodes. There is also curve which is an abbreviation for acurve. All these standard paths are defined in a way that makes sense no matter where the two nodes are relative to each other, except that no promise of a sensible result is made for two nodes very close together.

@Link has two options, bias and radius, that may be used to fine-tune the path. The bias option determines the maximum distance that a curve is permitted to stray:

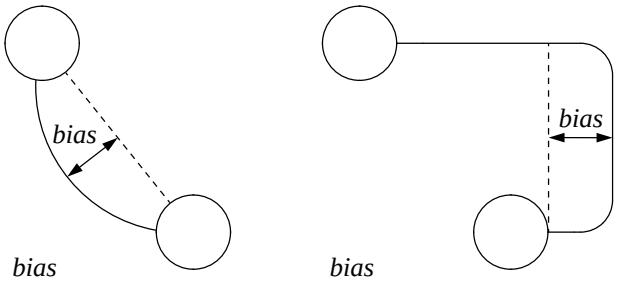

The radius option does *not* apply to acurve and ccurve; rather, it determines the radius of the arcs at the corners of rvlcurve and its kin. A very large radius will be reduced to the largest reasonable value, which provides a way to get a semicircle at the right in an rvlcurve.

Lout has no idea where the path is wandering, and cannot take it into account when placing a diagram on the page:



```
@Link
   path { ccurve }
   bias { 2c }
```

In such cases you have to arrange for the extra space yourself, by adding an extra paragraph symbol, blank row or column in a table, or whatever.

As with the options of @Node, the options of @Link may all be given to @Diag as well, where they apply to every link in the diagram, unless overridden in the usual way. They also appear in the setup file, where they apply to every link in every diagram of the document, unless overridden.

There are pathstyle, pathdashlength and pathwidth options which affect the appearance of the path in the same way as the outlinestyle, outlinedashlength and outlinewidth options of @Node affect the outline. When pathstyle contains just one value (as opposed to a sequence of values) @Diag tries to divide the path into fewer segments than it would otherwise, to make dashed and dotted paths look as good as possible.

The @Link symbol has an arrow option, which adds an arrowhead to the end of the link:

```
@Link
   arrow { yes }
```

Its value may be no (the default), yes, forward (which is the same as yes), back, or both:

```
@Link
   arrow { both }
```



@Link has three options for controlling the appearance of arrowheads: arrowstyle, arrowwidth, and arrowlength. Although every link symbol has these options, for consistency it is almost always better to set the corresponding options to the @Diag symbol, which applies them to every arrow in the diagram:

```
@Diag
   arrowstyle { solid }
   arrowwidth { 0.3f }
   arrowlength { 0.5f }
{
   ...
}
```

This shows the default values: a solid arrowhead like the ones above, 0.3f wide (across) and 0.5f long. The arrowwidth and arrowlength options may be any length; it may be necessary to decrease arrowwidth when many arrows enter one node. The full list of possible values for arrowstyle is

arrowstyle { solid }

arrowstyle { halfopen }

arrowstyle { open }

arrowstyle { curvedsolid }

arrowstyle { curvedhalfopen }

arrowstyle { curvedopen }

arrowstyle { circle }

arrowstyle { box }

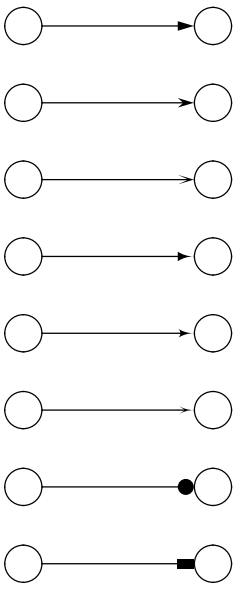

The reader is invited to admire the beautifully sharp points on these arrowheads.[1]

It is possible to place an arbitrary object at the beginning or end of a link, using the fromlabel and tolabel options of Section 9.5.

[1]The outlines of all nodes and arrowheads are drawn on the inside of the geometrical curve defining them, not centred over the curve as is common in PostScript documents. Hence, the arrowheads and node outlines intersect at a true geometrical point; they do not overlap by one line width. Furthermore, the standard link paths terminate at the base of the arrowhead, not at the point; the arrowhead itself is responsible for continuing the link path, at the appropriate width (although never dashed or dotted), from its base to its point, and hence can and does ensure that the link path does not overstrike and thicken the point of the arrow.

To save time in common cases, @Diag provides link symbols, each of which is just @Link with one of the standard paths already set: @Line, @Curve, @CCurve, @RVLCurve, and so on. There are also symbols in which the arrow option is set to yes in addition: @Arrow, @CurveArrow, @CCurveArrow, @RVLCurveArrow, and so on. See the summary (Section 9.11) for the full list of these symbols. You will still need the arrow option to get backward arrows and double-ended arrows.

9.4. Tags

In addition to drawing the outline, each of the standard node types also attaches names, called *tags*, to certain points. For example, the @Ellipse symbol creates nine tags:

```
@Ellipse
```



The standard link symbols also create tags:

```
@Link
```



The names and positions of all standard tags may be found in the summary (Section 9.11) at the end of this chapter. Each tag stands for a point, and may be used wherever a point is required:

```
@Ellipse { Hello, world }
//
@Link from { SW } to { SE }
```



A tag may only be used later in the text of the diagram than the place where it is defined.

Standard tags like N and S are not much use as they are, since in general there will be many nodes and hence many N and S tags. The retagging symbol, ::, solves this problem:

```
A:: @Ellipse
```



Within the following object, the points have their original tags, but afterwards the names are changed by prefixing the word preceding ::, plus a @ character, to each one. These longer tags may be used exactly like the others:

```
A:: @Ellipse { Hello, world }
//
@Link from { A@SW } to { A@SE }
```



The retagging symbol may be applied to links, and indeed to arbitrary objects; it will retag every tag within the following object, even tags that have already been retagged:

```
A:: {
   1:: @Ellipse
      vsize { 1.0c }
      hsize { 2.5c }
   @DP
   @DP
   2:: @Ellipse
      vsize { 1.0c }
      hsize { 2.5c }
}
```



In practice one usually only retags individual nodes. It is best to use only upper-case letters and digits in tags, because Lout and PostScript have tags of their own containing lower-case letters, and any mixup causes total disaster.

When a tag lies within the object following some node, it is automatically retagged in this way with tag IN. For example, in

```
@Square
@Circle Hello
```

the circle lies within the square, and what you get in effect is

```
@Square
IN:: @Circle Hello
```

This prevents confusion between the tags of the inner and outer nodes. This retagging cannot be left to the user's discretion, owing to unexpected effects on the positioning of labels of the outer node if inner tags are not retagged.

Although from and to are just two of several options within @Diag where a point is expected, and hence where a tag may be given, they have a special virtue not shared by any other options. It is possible to give the name of an entire node, not just a tag denoting one point, to them:

```
A:: @Circle
@DP
B:: @Ellipse { Hello, world }
//
@Link from { A } to { B }
```



This will select a point on the outline of the named node, appropriate to the type of link being drawn. It is extremely useful, of course, but potentially confusing: A and B do not denote points and are not tags, strictly speaking, at all.

9.5. Labels

Diagrams often contain small *labels* adjacent to their nodes and links:



Each node may have up to four labels, called alabel, blabel, clabel, and dlabel:

```
@Ellipse
   alabel { a }
   blabel { b }
   clabel { c }
   dlabel { d }
{ Hello, world }
```



Links also have labels, five in fact:

```
@Link
   fromlabel { f }
   xlabel { x }
   ylabel { y }
   zlabel { z }
   tolabel { t }
```



The fromlabel and tolabel options are positioned directly over the endpoints of the link, and fromlabel is by default printed at a funny angle, because these labels are the means of attaching arrowheads to links:

```
@Link
   tolabel { @SolidArrowHead }
```

@SolidArrowHead is a symbol available for use anywhere whose value is an object in the shape of a small solid arrowhead. The arrowhead options of Section 9.3 work by setting fromlabel and tolabel in exactly this way. Usually it is best to forget about fromlabel and tolabel, and think of links as having three labels: xlabel near the start, ylabel in the middle, and zlabel near the end.

Adding a label will not change the size of the diagram or the position of any node, link, or other label. Although a label may be an arbitrary object, it is treated as having zero size and will overstrike anything that happens to be where it wants to go.

There are options for controlling the appearance and position of labels. These are described below mainly for alabel, but there are corresponding options for all nine labels.

The alabelfont and alabelbreak options determine the font and paragraph breaking style of the label:

```
@Ellipse
   alabel { a }
   alabelfont { -2p }
   alabelbreak { ragged nohyphen }
{ Hello, world }
```



This example shows the default values of these two options; -2p explains why the labels in earlier examples were printed in a smaller font size. There is also an alabelformat option which allows for more radical changes in appearance:

```
@Ellipse
   alabel { a }
   alabelformat { @Box @I @Body }
{ Hello, world }
```



The value attached to the ellipse will be the value of alabelformat, with any @Body symbol within it replaced by the value of the alabel option. This example produces boxed italic labels.

Nodes also have nodelabelfont, nodelabelbreak, and nodelabelformat options which work in the same way but affect all of the node labels, not just one:

```
@Ellipse
   nodelabelformat
      { @Box @I @Body }
   alabel { a }
   blabel { b }
{ Hello, world }
```



Links similarly have linklabelfont, linklabelbreak, and linklabelformat options which affect all the link labels (except fromlabel and tolabel, since that would produce results that people do not expect.) The @Diag symbol also has these options, in the usual way, and they are extremely useful there:

```
@Diag
   nodelabelfont { Slope -2p }
   linklabelformat { "/"@Body"/" }
   hsize { 1.8c }
{
   A:: @Ellipse alabel { a } { OK }
   @DP
   @DP
   B:: @Ellipse alabel { b } { FAULT }
   //
   @Arrow from { A } to { B } ylabel { sig }
}
```



These settings specify that every node label will be set in italics, two points smaller than the surrounding text, and that every link label will appear between two / characters, also two points smaller because the default value of linklabelfont still applies. Of course, it remains open to any

node or link to override these settings by supplying its own label options.

The remaining five label options, alabelpos, alabelangle, alabelprox, alabelmargin, alabelctr, and alabeladjust, affect the position of the label. Don't be daunted by the number of options. As previous examples have shown, they all have sensible default values and thus need to be set only rarely.

Each label inhabits its own characteristic region of the node or link: alabel in the north-east corner of the node, ylabel halfway along the link, and so on. This general location of the label is defined by the alabelpos option. Here are the default values for all nine labels:

```
@Node
   alabelpos { NE }
   blabelpos { NW }
   clabelpos { SW }
   dlabelpos { SE }
```




```
@Link
   fromlabelpos { FROM }
   xlabelpos { LFROM }
   ylabelpos { LMID }
   zlabelpos { LTO }
   tolabelpos { TO }
```



Thus, by changing clabelpos to S you can move the position of the clabel label to beneath the node. You can do this for every node by setting this option in the @Diag symbol, as was done for the formatting options above.

In a similar vein, there is an xindent option which controls how far from the start of the link the LFROM tag, and hence the xlabel, will appear. A similar option, zindent, determines how far from the end of the link the LTO tag and hence the zlabel will appear:

```
@Link
   xindent { 1f }
   zindent { 2f }
```



Both options have default value 0.8f.

The alabelangle option determines the angle at which the label is printed:

alabelangle { horizontal }	Horizontal (the default)
alabelangle { aligned }	Aligned with the node outline or link path
alabelangle { perpendicular }	Perpendicular to the outline or link path

The alabelprox option determines where in the proximity of alabelpos the label is printed:

alabelprox { above }	Above the node outline or link path (the default for link labels)
alabelprox { below }	Below the node outline or link path
alabelprox { left }	To the left of the node outline or link path
alabelprox { right }	To the right of the node outline or link path
alabelprox { inside }	Inside the node outline or on the left of the link path going from from to to
alabelprox { outside }	Outside the node outline or on the right of the link path going from from to to (the default for node labels)

The alabelmargin option adds a margin around all four sides of the label, thereby moving it away from alabelpos irrespective of which direction it happens to lie in:

```
@Ellipse
   alabel { a }
   alabelmargin { 0f }
{ Hello, world }
```



The default value is 0.2f, and so there is scope for some reduction as well as increase.

@Diag takes careful account of the alabelangle option, the alabelprox option, the direction that the node outline or link path is heading, and which label it is, and places the label in a way that looks good nearly always. When it doesn't, the remainder of this section should help.

The alabelangle option may be given an arbitrary angle, and then the label will be printed at that angle. There are also the special values parallel and antiparallel, which give the direction that the node outline or link path is going at that point and its opposite. These are the default values for tolabelangle and fromlabelangle respectively, which explains why arrowheads point the right way. The aligned value above is one of these two angles, the one closest to 0d.

The alabelprox option may be N, S, E, W, NE, SE, NW, SW, or CTR:



meaning that the indicated point of the label will coincide with alabelpos. These points lie on the outside of the margins added by alabelmargin.

The six values of alabelprox given earlier (above, below, etc.) all produce one of N, S etc. for their ultimate result; which one they produce depends on the direction the outline or link is going at that point. For example, above produces SE when the outline or link is going from northeast to southwest or vice versa, SW when the outline or link is going from northwest to southeast and vice versa, and S when it happens to be exactly horizontal. There is also a dependence on which label it is: for example, if it is xlabel and the direction happens to be vertical, the result is NW.

The preceding discussion is all under the assumption that the alabelctr option is no. When it is yes, a small adjustment is made to the position of the label. The selected corner or side midpoint of the label will no longer coincide with alabelpos, although it will still lie on the straight line passing through alabelpos at the angle of alabelpos. The corner or side midpoint

slides up or down this line to the point which minimises the distance from alabelpos to the centre of the label. Only ylabelctr has yes for its default value; the y label often looks better centred when this adjustment is made, particularly on lines with shallow but non-zero slope:

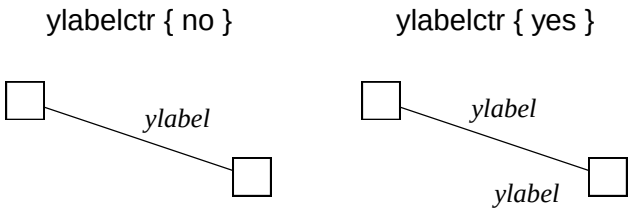

since it is then the centre of the label which is centred on the link, rather than one of its corners.

Finally, when all else fails there is an alabeladjust option which translates the label by an arbitrary amount:

```
alabeladjust { -0.5c 1.5c }
```

causes the label to appear 0.5 centimetres to the left of and 1.5 centimetres above the point where it otherwise would have done.

9.6. Positioning

Once the nodes of the diagram are in place, @Diag can be trusted to look after the rest: links to standard outlines will terminate neatly on their boundaries, labels will not overstrike links no matter what direction they are heading, and so on. The great weakness of @Diag is in positioning the nodes. This is partly because 'what pleases the eye' is the positioning rule in many diagrams, and an interactive system is really needed in such cases; and partly because, even when the rule is more formal (for example, when the nodes are to be laid out in a grid), @Diag does not have symbols to produce it anyway.

Previous examples have used @DP for getting nodes one under another, and white space between nodes for getting them side by side, but this is very primitive. This section suggests three better ways: using @Tbl, using @Graph, and using coordinates; and the following section adds a fourth, using @Diag's tree-drawing symbols. It's a bit of a jumble.

The @Tbl symbol (Chapter 6) is a good choice when the nodes have any kind of grid-like arrangement:

```
@Diag {
@Tbl
   aformat { @Cell A | @Cell B | @Cell C }
   marginhorizontal { 0.5c }
   marginvertical { 0.25c }
{
@Rowa
   B { A:: @Square }
@Rowa
   A { B:: @Square }
   C { C:: @Square }
@Rowa
   B { D:: @Square }
}
//
@Arrow from { A } to { B }
@Arrow from { A } to { C }
@Arrow from { B } to { D }
@Arrow from { C } to { D }
@Arrow from { A } to { D }
}
```



The table occupies the nodes part. Tags may have the same name as columns; the two can never conflict.

Similarly, the @Graph symbol from Chapter 10 has an objects option which can place arbitrary objects, including labelled nodes, anywhere on a graph:

```
@Diag {
@Graph
   xmin { 0 }
   xmax { 100 }
   ymin { 0 }
   ymax { 100 }
   objects {
      @CTR at { 20 30 } { A:: @Square }
      @CTR at { 60 70 } { B:: @Square }
   }
{}
//
@Link from { A } to { B }
}
```

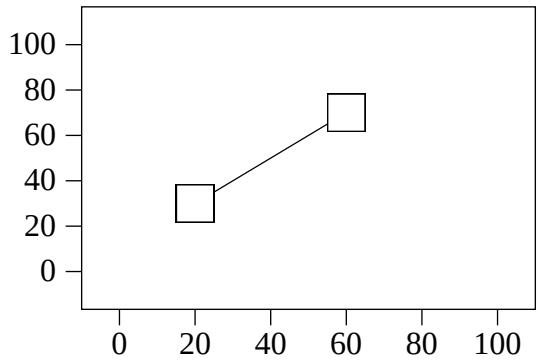

Once again the @Graph symbol occupies the nodes part. You can get rid of the axes by setting the style option of @Graph to none, and then it won't look like a graph at all.

@Diag has a system of node positioning based on coordinates which is somewhat similar to the @Graph one. It is often the easiest way to scatter nodes about a diagram at random. The first step is to create a nodes part that is just an empty space of whatever size you want the final

diagram to be:

```
@Diag {
   4c @High 6c @Wide
   //
   ...
}
```

As shown, this is done with the @Wide and @High symbols from basic Lout; the above diagram will be four centimetres high by six centimetres wide.

@Diag has a , symbol that allows you to specify a point by its coordinates in the diagram's base. For example, 0,0 denotes the bottom left-hand corner of the base, 1,0 denotes the bottom right-hand corner, and 0.5,0.5 denotes the centre of the base. Coordinates should usually be between 0 and 1, since otherwise they denote points outside the base (which is allowed but seldom useful).

Every node symbol has a translate option which allows you to move the node about on the diagram's base (or off it if you use coordinates less than 0 or greater than 1). If you use this option, the node effectively has zero size and overstrikes anything else in the area you put it (like labels do). It is best to put these nodes in the links part:

```
@Diag {
@Box margin { 0c } 4c @Wide 5c @High
//
A:: @Square
     translate { CTR to 0.5, 0.67 }
   { @I A }
B:: @Circle
     translate { CTR to 0.8, 0.25 }
   { @I B }
}
```



A box with margin zero has been drawn around the empty space to show its extent. The value of translate should always be *point* to *point*; the first point lies within the node, the second lies within the nodes part, and the translation makes these two points coincide.

You are free to have nodes in the nodes part as well, or any object at all. Here is an example which shows what a little ingenuity can accomplish:

```
@Diag {
@Polygon
   sides { 5 }
   outlinestyle { noline }
   hsize { 4c }
   vsize { 4c }
//
A:: @Circle translate { N to P1 } {}
B:: @Circle translate { N to P2 } {}
C:: @Circle translate { N to P3 } {}
D:: @Circle translate { N to P4 } {}
E:: @Circle translate { N to P5 } {}
@Link arrow { both } from { A } to { B }
@Link arrow { both } from { B } to { C }
@Link arrow { both } from { C } to { D }
@Link arrow { both } from { D } to { E }
@Link arrow { both } from { E } to { A }
}
```

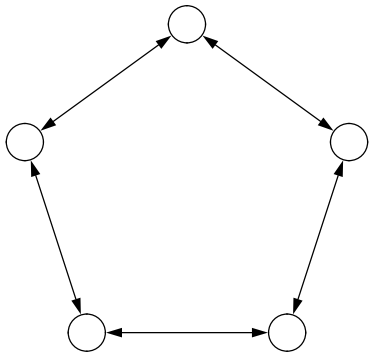

This uses the tags of a phantom polygon to position the real nodes. It would be a rare interactive system that could position nodes with this precision; @Diag shines whenever there is a formal positioning rule to follow.

9.7. Trees

@Diag offers some symbols for producing tree diagrams, using the @Tree symbol, which may appear anywhere within the nodes part:

```
@Diag {
   ...
   @Tree { ... }
   ...
}
```

Within this symbol, new symbols @LeftSub, @RightSub, @FirstSub, @NextSub, and @StubSub become available. The first two are used to get a (non-empty) binary tree:

```
@Tree {
   @Circle A
   @LeftSub {
      @Circle B
      @LeftSub @Square C
      @RightSub @Square D
   }
   @RightSub @Circle E
}
```



The root of the tree, which must be a single node but may have any outline, comes first. After that comes the @LeftSub symbol followed by the left subtree, which must be enclosed in braces unless it consists of a single node. After that comes the @RightSub symbol followed by the right subtree, again enclosed in braces unless it consists of a single node. These rules apply recursively and will produce a binary tree of arbitrary size and depth. If a node has no left or right subtree, leave out the corresponding @LeftSub or @RightSub symbol.

A similar system using @FirstSub and @NextSub produces trees in which each node may have arbitrarily many children:

```
@Tree {
   @Circle A
   @FirstSub {
      @Circle B
      @FirstSub @Square C
      @NextSub @Square D
   }
   @NextSub @Circle E
   @NextSub @Circle F
}
```



The first subtree is preceded by @FirstSub, and subsequent trees are preceded by @NextSub. The subtrees are spaced at equal separations from each other, with the root centred over them, in contrast to the binary tree arrangement in which the two subtrees are positioned to the left and right of the root, never intruding into the space beneath it.

Although each subtree must contain a node for its root, it is not hard to get around this:

```
@Tree
{
@Circle
@FirstSub @Circle
@NextSub pathstyle { noline }
   @Circle outlinestyle { noline }
      ...
@NextSub @Circle
}
```



Clumsy as this is, it often assists in placing the unenclosed object in a way consistent with the surrounding nodes, and offers margins and so forth which help with fine-tuning its position.

The fifth subtree symbol, @StubSub, produces a stub subtree:

```
@Tree {
@Circle @Eq { a }
@StubSub @Eq { T tsub a }
}
```

Unlike the other subtree symbols, @StubSub is not followed by a subtree with a node for its root; rather, it is followed by an arbitrary object, and the path is drawn around this stub object, which is

placed directly underneath the parent node with zero vertical separation. In practice, it is usually necessary to attach margins to the following object; the easiest way to do that is to enclose it in @Box outlinestyle { noline }. An example appears below.

It is possible to mix the three subtree types, by having binary tree symbols following some nodes, non-binary tree symbols following others, and a single @StubSub following others. However, at any one node the subtrees must be all either binary, non-binary, or stub.

The subtree symbols have all of the options of @Link, and these apply to the link drawn from the parent of the root of the subtree to the root of the subtree (or anticlockwise around the stub object):

```
@Tree {
   @Circle A
   @LeftSub
      arrow { yes }
      xlabel { 1 }
   @Circle B
   @RightSub
      arrow { yes }
      xlabel { 2 }
   @Circle C
}
```



To get reverse arrows use arrow { back } as usual.

The subtree symbols do not need from and to options, because they already know which nodes they are linking together. However, you may use from or to to give a tag specifying a particular point within the node:

```
@Tree {
@Circle
@LeftSub from { S } to { N }
   @Isosceles vsize { 2f }
@RightSub from { S } to { N }
   @Isosceles vsize { 2f }
}
```



In this example both links go from the S tag of the parent node to the N tag of the child node (at the apex of the iscosceles triangle). These options also work for @StubSub, where they refer to the start and end of the stub path:

```
@Tree {
@Circle @Eq { a }
@StubSub
   from { SW }
   to { SE }
@Box outlinestyle { noline }
   @Eq { T tsub a }
}
```



and so the tags both refer to points in the parent node in this case.

The @LeftSub and @RightSub symbols have variants called @ZeroWidthLeftSub and @ZeroWidthRightSub which are the same except that the resulting subtrees consume no width:

```
@Tree {
@Circle
@LeftSub {
   @Circle
   @LeftSub @Square
   @RightSub @Square
}
@RightSub {
   @Circle
   @LeftSub {
      @Circle
      @ZeroWidthLeftSub @Square
      @ZeroWidthRightSub @Square
   }
   @RightSub @Square
} }
```



There is nothing analogous for the other subtree symbols.

The @Diag symbol has a few options for adjusting the appearance of the tree. The treehsep option determines the horizontal space left between a root and its left subtree, between a root and its right subtree, and between one subtree and the next when @NextSub is used. The treevsep option determines the vertical space left between a root and its subtrees:

```
@Diag
   treehsep { 0c }
   treevsep { 0c }
{
@Tree
{
   @Circle A
   @LeftSub @Square B
   @RightSub @Square C
}
}
```



These options may also be given to individual subtree symbols, although treevsep works as expected only with @LeftSub and @FirstSub, since these determine the vertical separation of all children of their parent.

The treehindent option determines where the root of a non-binary tree is positioned over its subtrees; the value may be left for at left, ctr for centred over them (the default), right for at the right, or any length, meaning that far from the left. Owing to problems behind the scenes, this option may not be given to individual subtree symbols; so as a consolation, it is permitted as an

option to the @Tree symbol.

It is not possible to attach tags to nodes within a tree, because tags are attached automatically by the tree symbols and any extra tags would disrupt the linking. However, you can use @ShowTags to find out what these automatic tags are, and use them in a subsequent links part. For example, the tag attached to the right child of the left child of the root of a binary tree is L@R@T, and in general the tag records the path from the root to the node, with T added to the end. The root always has tag T. The tree as a whole may be retagged in the usual way.

There is an @HTree symbol which is the same as @Tree except that the tree grows horizontally (from left to right) instead of vertically. The same symbols are available within @HTree as within @Tree; @LeftSub and @FirstSub produce what might be called the top subtree, and @RightSub and @NextSub produce lower trees. @HTree has no treehindent option; instead, it has an exactly analogous treevindent option.

@HTree may be used to get horizontal lists:

```
@I @Diag
   arrow { yes } treehsep { 1c } {
@HTree {
   @Node A
   @FirstSub {
      @Node B
      @FirstSub @Node C
   }
}
}
```



The braces are clumsy but necessary. The first node has tag T, the second has tag S@T, the third has tag S@S@T, and so on.

9.8. Errors

Lout normally produces an output file that will print without mishap on any PostScript device. However, some of the options of @Diag's symbols are passed through Lout to the output file without checking, including anything containing @Diag lengths, angles, points, and tags. Any errors in these options will not be detected until the file is printed.

The most likely errors are *syntax errors*, as in outline { 0 0 [0 xsize } for example, in which a] is missing; *type errors*, as in SE:: 45d where the following object should have been a point; and *undefined errors*, arising from labels misspelt or used before being defined. Less commonly, the options may all be correct but the figure is too large in some way: too many labels, too deeply nested, and so on.

When an error is detected, @Diag arranges for the offending page to be printed up to the point where the error occurred, with a message nearby describing the error. Printing of the document is then aborted. It is often quite easy to find the problem, because it lies in whatever should have been printed next.

If you see VMerror in an error message, it means that the printer is running out of memory. In that case, one thing you can try is

```
@Diag
   save { yes }
...
```

This causes the memory used by @Diag to be reclaimed as soon as the diagram is printed, rather than at the end of the current page as is usual. However, if the diagram is nested inside some other major Lout package, such as @Graph, use of this option may cause other PostScript errors.

If you see dictfull in an error message, it means that you are using an old version of PostScript. Increasing the maxlabels option of @Diag (Section 9.11) might fix the problem.

9.9. Expert usage: defining new shapes

@Diag permits you to create your own node outlines and link paths, by giving non-standard values to the outline and path options. This section shows how to do this for very simple shapes only; the following section introduces the large repertoire of geometrical symbols that @Diag offers for helping you create complex shapes.

As explained earlier, a node outline is drawn over its *base*, which is a rectangle containing the following object plus margins. The base defines a coordinate system with the point (0, 0) at the bottom left corner, and (*xsize*, *ysize*) at the top right:



The value of the outline option is a sequence of points defined in this coordinate system:

```
@Node
   outline {
      0 0
      xsize 0
      0 ysize
      0 0
   }
```



As shown, the resulting outline is created by joining each point to the next with a straight line. It is conventional to proceed anticlockwise around the outline, but you may start anywhere.

The paint, outlinestyle, outlinedashlength, and outlinewidth options of @Node work for user-defined outlines exactly as they do for the standard ones:

```
@Node
  outline {
    0 0
    xsize 0
    0 ysize
    0 0
  }
  paint { lightgrey }
  outlinestyle { solid dashed }
```



Each line in the outline is one segment for outlinestyle.

If two points in an outline are separated by [], no line is drawn between them, and the outline is treated as two separate, disconnected regions when painting.

Two points may also be separated by [*point*], where *point* stands for any point. This causes the two points to be joined by an arc whose centre is at the given point:

```
@Node
  outline {
    0 0
    ysize 0
    [ 0 0 ]
    0 ysize
    0 0
  }
```



The arc will be circular if possible, otherwise it will be part of an ellipse whose axes are oriented horizontally and vertically. The arc goes anticlockwise; to get a clockwise arc, use [*point* clockwise].

Two points may be separated by [x_1 y_1 x_2 y_2], which requests that a Bezier curve be drawn between them with control points (x_1, y_1) and (x_2, y_2):

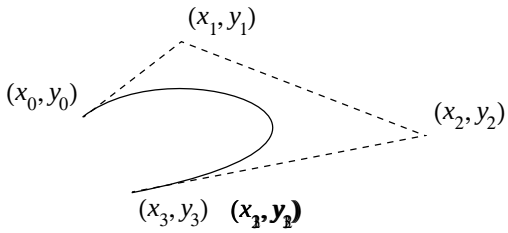

The curve is attracted toward the control points, without reaching them; it is tangent to the straight line from the start point to the first control point, and from the second control point to the finishing point, and it lies wholly inside the quadrilateral formed by the four points. Owing to the author's laziness, dashes and dots do not fit as neatly onto Bezier curves as they do onto lines and arcs.

Tags (Section 9.4) may be assigned to points within the outline option, like this:

```
@Node
   outline {
      LR:: { xsize 0 }
      UL:: { 0 ysize }
      0 0  LR  UL  0 0
   }
```



The tagged point does not have to lie on the outline, and it is not automatically added to the outline. Once defined, a tag stands for a point in the usual way; it may be used later in the outline, as was done above, relabelled, and so on, exactly like the tags of the standard nodes.

Once a point has been tagged, a *direction* may be associated with it, to inform @Diag which way the outline or link path is going at that point. The standard outlines have directions:

```
@Ellipse { 3c @Wide 1c @High }
```



CTR has no direction. If available, direction information is used when placing labels, in the proximity step (by above, for example) and in the angle step if the label is aligned, perpendicular, parallel, or antiparallel. A direction is given using the :< symbol within an outline:

```
@Node
   outline {
      LR:: { xsize 0 }
      LR:< 0d
      UL:: { 0 ysize }
      UL:< 270d
      0 0 LR UL 0 0
   }
```



It is often helpful when creating outlines to check where the tagged points and directions really are, by printing them out as is done above. For this there is a @ShowTags symbol whose result is the following (arbitrary) object with its tagged points visible, and a @ShowDirections symbol which works similarly and shows the directions. The diagram above was printed using @ShowTags @ShowDirections @Node ... There is also a @ShowPoints symbol which is like @ShowTags except that it omits the tags, just placing circles on the points.

Link paths are similar to node outlines, created using the path option of @Link instead of the outline option of @Node. The major difference is that links have no base, so xsize and ysize cannot be used. Indeed, even 0 0 does not have any useful meaning inside a link path.

Within a link path, the symbols from and to denote the values of the link's from and to options, and these form the basis of constructing the link path:

```
@Link
   path {
      FROM:: from
      TO:: to
      FROM TO
   }
```



This simple example creates two tagged points and joins them with a straight line. If you want a link that can carry arrowheads, it is best to ensure that it creates FROM and TO tags, with directions pointing along the link from FROM to TO at both points, since then the default values of the various arrow options will do the rest. Similarly, if you want labels you need to define LFROM, LMID, and LTO labels, ideally also with directions.

Once the outline or path is complete, unless it is really a one-off production the best thing to do with it is to add it to your mydefs file in the following form:

```
extend @DiagSetup @Diag
macro @MyNode {
   @Node
      outline {
         LR:: { xsize 0 }
         LR:< 0d
         UL:: { 0 ysize }
         UL:< 270d
         0 0 LR UL 0 0
      }
}
```

This says that we are 'extending' the @Diag symbol by adding a new symbol, @MyNode, which stands for what follows it between braces. @MyNode will then behave exactly like @Circle and the other standard node symbols. The same pattern works for links:

```
extend @DiagSetup @Diag
macro @MyLink {
   @Link
      path {
         FROM:: from
         TO:: to
         FROM TO
      }
}
```

If it is worth the effort to construct a new outline or link path, it is worth packaging it like this and thinking up a good name for it, for then it will be available, easily, forever.

This same approach is also useful to define common combinations of options, even when there is no new outline or path:

```
extend @DiagSetup @Diag
macro @BigOctagon {
   @Polygon
      sides { 8 }
      hsize { 5c }
      vsize { 5c }
      font { Bold }
}
```

Such definitions are very useful if the combinations occur frequently. Any options not mentioned have their usual default values, and may be set in the usual way:

```
@BigOctagon outlinestyle { dashed } ...
```

Attempts to reset an already set option will elicit a warning message.

9.10. Expert usage: numbers, lengths, angles, and points

@Diag has many options whose values contain lengths, angles, and points. Options such as margin and vsize, which affect the size or appearance of the base of a node, may contain only the kinds of lengths described in Section 1.2; but in all other cases arbitrarily complex algebraic expressions may be used to specify the values.

The usual mathematical operations may be applied to numbers, angles, and lengths:

```
2.0f + 3.0f * sin { 30d }
```

is a valid length. Since this is just ordinary algebra on real numbers, the unsurprising details are deferred to the summary (Section 9.11). Grouping is always done with braces, never parentheses.

More interesting are the geometrical symbols that @Diag provides. The most fundamental is not a symbol at all: two lengths side by side define a point. For example,

```
xsize  ysize * 0.5
```

within an outline is the point at the far right of the base, halfway up.

There are ++ and -- symbols for vector addition and subtraction of two points, and ** for multiplication by a scalar. For example,

```
A@CTR ++ { 1.0f 0 }
```

is the point 1f to the right of A@CTR. It is a good idea to distinguish between *absolute points*, like A@CTR and 0.5,1, which denote fixed positions on the page, and *relative points*, like 1.0f 0, which serve as offsets from absolute points. The difference of two absolute points is a relative point; adding two absolute points gives an unpredictable result because it depends on the origin of the coordinate system. However, the expression

```
P1 ** x ++ P2 ** {1 - x}
```

is safe for any two absolute points P1 and P2 and any number x; it produces a point on the line through the two points.

These remarks on safety do not apply within the outline option of @Node, because there the coordinate system is clearly specified. Vector operations, with the aid of a few well-chosen tags, can greatly simplify the production of outlines:

```
@Node
  outline {
    SB:: {0 ysize} ** 0.4
    ST:: {0 ysize} ** 0.6
    HB:: {xsize 0} ** 0.7
    SB
    SB ++ HB
    HB
    xsize  ysize * 0.5
    HB ++ {0 ysize}
    HB ++ ST
    ST
    SB
  }
  paint { grey }
{ 6c @Wide 2c @High }
```



But absolute sums like SB ++ HB are not safe in link paths and stray options like alabelpos.

Sometimes it is useful to define tags which are not wanted afterwards and are better forgotten. For this there is the := symbol, which works in much the same way as :: except that the tag is forgotten after the outline or path option ends. The value assigned does not have to be a point, it can be a length or angle, or even a sequence of values. It is permissible to change the value assigned to a tag by reassigning.

Two very useful symbols, angleto and atangle, bring angles into the algebra. The angleto symbol finds the angle from one point to another. For example,

```
SB angleto ST
```

in the outline above would produce 90d. The atangle symbol finds the point at a given length and angle from the origin. For example,

```
1.4142f atangle 45d
```

is the point 1f 1f, and

```
B@NE  ++ 2f atangle 115d
```

is the point 2f from B@NE to its northwest.

There is a prev symbol, used only within outline and path, which returns the previous point on the outline or path, ignoring points within []. It makes relative movements very easy:

```
outline {
  0 0
  { 2c atangle 30d }
  prev ++ { 2c atangle 90d }
  prev ++ { 2c atangle 150d }
  prev ++ { 2c atangle 210d }
  prev ++ { 2c atangle 270d }
  0 0
}
```



This example is rather naughty because the outline does not grow and shrink with the base as it should. Such outlines, while tempting, are always regretted later.

There are xcoord and ycoord symbols for finding the *x* and *y* coordinates of a point:

```
{xcoord P1} min {xcoord P2}   {ycoord P1} max {ycoord P2}
```

is the point at the top left-hand corner of the smallest rectangle containing points P1and P2. And there is a distance symbol which produces the (non-negative) distance between two points:

```
CTR  ++  { CTR distance NW } atangle { CTR angleto NW }
```

equals NW.

The rest of this section is concerned with how the 'special virtue' of the from and to options, their ability to accept a node tag as well as a point, is implemented behind the scenes. A good user-defined link should also have this virtue, because it is extremely useful.

The solution is based on a symbol called boundaryatangle, whose preceding object should be either a point or else the tag of a node with one of the standard shapes, and whose following object is an angle:

```
{ xsize ysize*0.5 } boundaryatangle 45d
A boundaryatangle 45d
```

In the first case the result is the point, regardless of the angle. In the second case, the result is the point on the boundary of the node whose tag is given, at the given angle from the centre.

There is a second symbol with a similar adaptive ability, called ??, which is defined to be @ whenever that would make sense, and otherwise to produce the preceding object for its result. For example, A??CTR will equal A@CTR if there is such a thing; but

```
{ xsize ysize*0.5 }??CTR
```

will have result { xsize ysize*0.5 } since replacing ?? by @ does not produce anything sensible.

Now suppose we want a link path that connects from and to by a straight line, where from and to may be either node tags or points. In either case a suitable direction for the line to take is

```
from??CTR angleto to??CTR
```

and so the desired path is

```
path {
   FROM:: from boundaryatangle { from??CTR angleto to??CTR }
   TO:: to boundaryatangle { to??CTR angleto from??CTR }
   FROM
   TO
}
```

The first line defines point FROM to be on the boundary of from at the appropriate angle, if from is a node tag; otherwise FROM is just the point from. The second line defines point TO similarly, and then the last two lines join these two points. The line standard link type is exactly this plus a few additional tags and directions.

9.11. Summary

Here is the complete list of standard node outlines that may be given to the @Node symbol. Each shows the outline name, any extra options relevant to this outline, base (shown as a grey box), segments (shown using outlinestyle { solid dashed }), tags, and directions (shown as a thick arrowhead wherever defined):

```
@Node
   outline { box }
```




```
@Node
   outline { curvebox }
```




```
@Node
   outline { shadowbox }
   shadow { 0.4f }
```




```
@Node
   outline { square }
```



```
@Node
   outline { diamond }
```




```
@Node
   outline { polygon }
   sides { 3 }
   angle { 180d / sides }
```

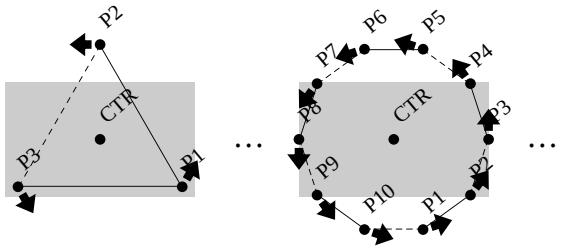


```
@Node
   outline { isosceles }
```




```
@Node
   outline { ellipse }
```




```
@Node
   outline { circle }
```



Here are the abbreviations for the standard shapes:

outline { box }	@Box
outline { curvebox }	@CurveBox
outline { shadowbox }	@ShadowBox
outline { square }	@Square
outline { diamond }	@Diamond
outline { polygon }	@Polygon
outline { isosceles }	@Isosceles
outline { ellipse }	@Ellipse
outline { circle }	@Circle

Here are all the options to the @Node symbol, their default values, and their ranges of allowed values. Definitions of *number*, *length*, *angle*, and *point* appear later in this summary. The options related to alabel, blabel, clabel, and dlabel have mostly been omitted since they are the same as the nodelabel options except for nodelabelpos.

@Node

outline	{ box }	box, curvebox, shadowbox, square, diamond, polygon, ellipse, circle, or any outline
margin	{ 0.6f }	any length from Section 1.2
shadow	{ 0.4f }	any *length*
sides	{ 3 }	any *number* (it will be rounded to the nearest integer)
angle	{ 180d / sides }	any *angle*
translate	{ }	empty, or *point* to *point*
outlinestyle	{ solid }	solid, dashed, cdashed, dotted, noline, or any sequence of one or more of these values
outlinedashlength	{ 0.2f }	any *length*
outlinewidth	{ thin }	thin, medium, thick, or any *length*
paint	{ nopaint }	nopaint or any colour from Section 8.1
font	{ }	any value suitable for the @Font symbol
break	{ }	any value suitable for the @Break symbol
format	{ @Body }	any object, usually containing @Body
valign	{ ctr }	top, ctr, foot, or any length from Section 1.2
vsize	{ }	empty, or any length from Section 1.2
vindent	{ ctr }	top, ctr, mctr, foot, or any length from Section 1.2
vstrut	{ no }	no, yes, or any length from Section 1.2
vmargin	{ margin }	any length from Section 1.2
topmargin	{ vmargin }	any length from Section 1.2
footmargin	{ vmargin }	any length from Section 1.2
halign	{ ctr }	left, ctr, right, or any length from Section 1.2
hsize	{ }	empty, or any length from Section 1.2
hindent	{ ctr }	left, ctr, mctr, right, or any length from Section 1.2
hmargin	{ margin }	any length from Section 1.2
leftmargin	{ hmargin }	any length from Section 1.2
rightmargin	{ hmargin }	any length from Section 1.2
hstrut	{ no }	no, yes, or any length from Section 1.2
nodelabel	{ }	any object
nodelabelmargin	{ 0.2f }	any length from Section 1.2
nodelabelfont	{ -2p }	any value suitable for the @Font symbol
nodelabelbreak	{ ragged nohyphen }	any value suitable for the @Break symbol
nodelabelformat	{ @Body }	any object, usually containing @Body
nodelabelpos	{ }	any *point*
nodelabelangle	{ horizontal }	horizontal, aligned, or perpendicular; parallel, antiparallel, or any *angle*
nodelabelprox	{ outside }	above, below, left, right, inside, or outside; CTR, N, S, E, W, NE, NW, SW, or SE
nodelabelctr	{ no }	yes or no
nodelabeladjust	{ 0 0 }	any *point*

alabelpos	{ NE	}	any *point*
blabelpos	{ NW	}	any *point*
clabelpos	{ SW	}	any *point*
dlabelpos	{ SE	}	any *point*

Here is the complete list of standard link paths that may be given to the @Link symbol. Each entry shows the link path name, any extra options relevant to this path, segments (shown using outlinestyle { solid dashed }, and tags. All tags have directions pointing along the link from FROM to TO; these have been omitted for clarity. The frompt and topt options of bezier are compulsory and denote the two control points (Section 9.9).

```
@Link
   path { line }
```




```
@Link
   path { curve }
   bias { 2.0f }
```

```
@Link
   path { ccurve }
   bias { 2.0f }
```

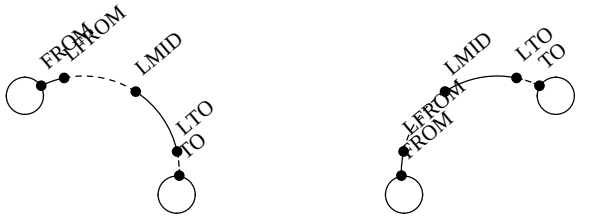


```
@Link
   path { bezier }
   frompt { A@CTR ++ { 3f 0 } }
   topt { B@CTR ++ { 3f 0 } }
```




```
@Link
   path { vhline }
```

```
@Link
   path { hvline }
```



```
@Link
   path { vhcurve }
   radius { 1.0f }
```

```
@Link
   path { hvcurve }
   radius { 1.0f }
```




```
@Link
   path { lvrline }
   bias { 2.0f }
```

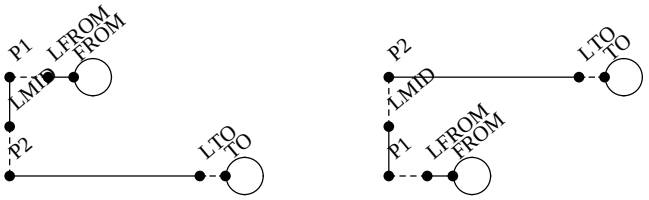


```
@Link
   path { rvlline }
   bias { 2.0f }
```

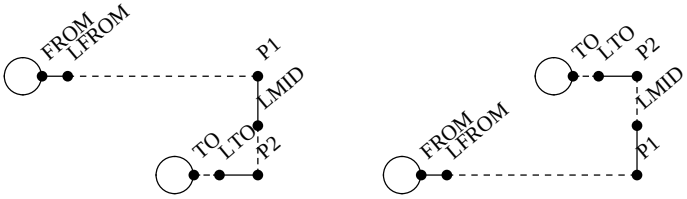


```
@Link
   path { lvrcurve }
   bias { 2.0f }
   radius { 1.0f }
```

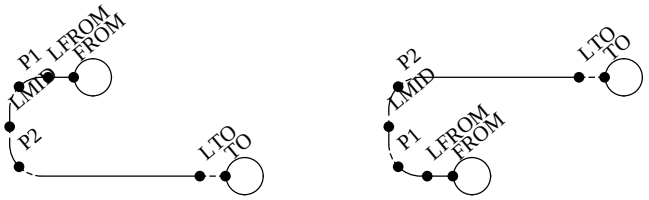


```
@Link
   path { rvlcurve }
   bias { 2.0f }
   radius { 1.0f }
```

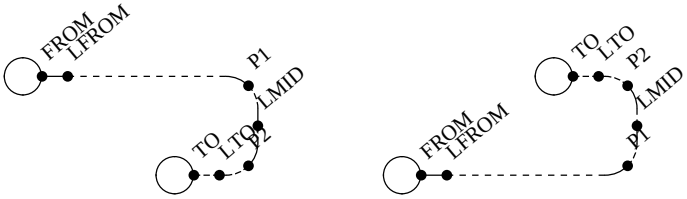


```
@Link
   path { dwrapline }
   tbias { 2.0f }
   bias { 2.0f }
   fbias { 2.0f }
```

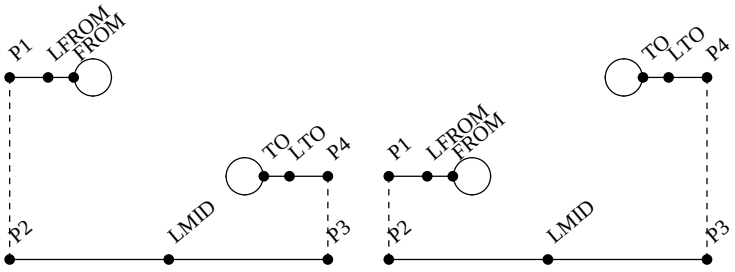

```
@Link
   path { uwrapline }
   tbias { 2.0f }
   bias { 2.0f }
   fbias { 2.0f }
```

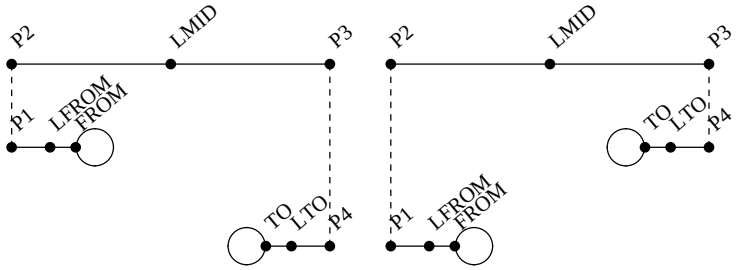


```
@Link
   path { dwrapcurve }
   tbias { 2.0f }
   bias { 2.0f }
   fbias { 2.0f }
   radius { 1.0f }
```

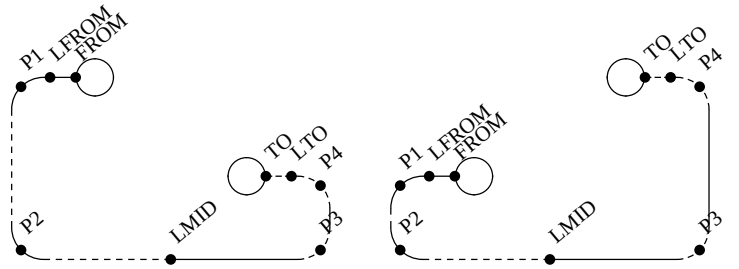


```
@Link
   path { uwrapcurve }
   tbias { 2.0f }
   bias { 2.0f }
   fbias { 2.0f }
   radius { 1.0f }
```

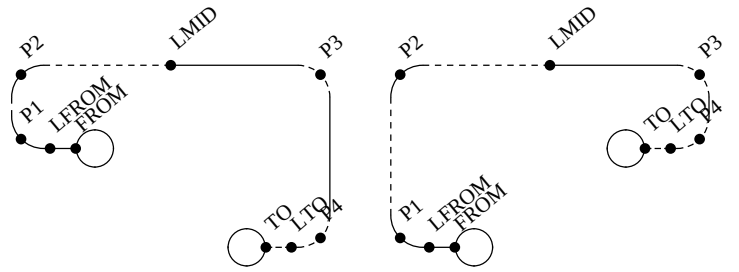

Here is the list of abbreviations for the standard paths (note that curve and acurve are the same). Each path also has an abbreviation which adds a forward arrow:

path { line }	@Line	@Arrow
path { curve }	@Curve	@CurveArrow
path { acurve }	@ACurve	@ACurveArrow
path { ccurve }	@CCurve	@CCurveArrow
path { bezier }	@Bezier	@BezierArrow
path { hvline }	@HVLine	@HVArrow
path { vhline }	@VHLine	@VHArrow
path { hvcurve }	@HVCurve	@HVCurveArrow
path { vhcurve }	@VHCurve	@VHCurveArrow
path { lvrline }	@LVRLine	@LVRArrow
path { rvlline }	@RVLLine	@RVLArrow
path { lvrcurve }	@LVRCurve	@LVRCurveArrow
path { rvlcurve }	@RVLCurve	@RVLCurveArrow
path { dwrapline }	@DWrapLine	@DWrapArrow
path { uwrapline }	@UWrapLine	@UWrapArrow
path { dwrapcurve }	@DWrapCurve	@DWrapCurveArrow
path { uwrapcurve }	@UWrapCurve	@UWrapCurveArrow

Here is the complete list of options to the @Link symbol. The options related to xlabel, ylabel,

and zlabel have been omitted where they are the same as the linklabel options.

@Link

path	{ line	}	line, curve, acurve, ccurve, bezier, vhline, hvline, vhcurve, hvcurve, lvrline, rvlline, lvrcurve, rvlcurve, dwrapline, uwrapline, dwrapcurve, uwrapcurve, or any path
from	{ 0,0	}	any *point* or node label
to	{ 1,1	}	any *point* or node label
bias	{ 2.0f	}	any *length*
fbias	{ 2.0f	}	any *length*
tbias	{ 2.0f	}	any *length*
radius	{ 1.0f	}	any *length*
xindent	{ 0.8f	}	any *length*
zindent	{ 0.8f	}	any *length*
frompt	{ 0 0	}	any *point*
topt	{ 0 0	}	any *point*
pathstyle	{ solid	}	solid, dashed, cdashed, dotted, noline, or any sequence of one or more of these values
pathdashlength	{ 0.2f	}	any *length*
pathwidth	{ thin	}	thin, medium, thick, or any *length*
arrow	{ no	}	no, yes, forward, back, or both
arrowstyle	{ solid	}	solid, halfopen, open, curvedsolid, curvedhalfopen, or curvedopen
arrowwidth	{ 0.3f	}	any *length*
arrowlength	{ 0.5f	}	any *length*
linklabel	{	}	any object
linklabelmargin	{ 0.2f	}	any length from Section 1.2
linklabelfont	{ -2p	}	any value suitable for the @Font symbol
linklabelbreak	{ ragged nohyphen	}	any value suitable for the @Break symbol
linklabelformat	{ @Body	}	any object, usually containing @Body
linklabelpos	{	}	any *point*
linklabelangle	{ horizontal	}	horizontal, aligned, or perpendicular; parallel, antiparallel, or any *angle*
linklabelprox	{ above	}	above, below, left, right, inside, or outside; CTR, N, S, E, W, NE, NW, SW, or SE
linklabelctr	{ no	}	yes or no
linklabeladjust	{ 0 0	}	any *point*
xlabelpos	{ LFROM	}	any *point*
ylabelpos	{ LMID	}	any *point*
ylabelctr	{ yes	}	yes or no
zlabelpos	{ LTO	}	any *point*
fromlabel	{	}	any object
fromlabelmargin	{ 0f	}	any length from Section 1.2
fromlabelfont	{	}	Any value suitable for the @Font symbol

fromlabelbreak	{ ragged nohyphen }	Any value suitable for the @Break symbol
fromlabelformat	{ @Body }	any object, usually containing @Body
fromlabelpos	{ FROM }	any *point*
fromlabelangle	{ antiparallel }	horizontal, aligned, or perpendicular; parallel, antiparallel, or any *angle*
fromlabelprox	{ W }	above, below, left, right, inside, or outside; CTR, N, S, E, W, NE, NW, SW, or SE
fromlabelctr	{ no }	yes or no
fromlabeladjust	{ 0 0 }	any *point*
tolabel	{ }	any object
tolabelmargin	{ 0f }	any length from Section 1.2
tolabelfont	{ }	Any value suitable for the @Font symbol
tolabelbreak	{ ragged nohyphen }	Any value suitable for the @Break symbol
tolabelformat	{ @Body }	any object, usually containing @Body
tolabelpos	{ TO }	any *point*
tolabelangle	{ parallel }	horizontal, aligned, or perpendicular; parallel, antiparallel, or any *angle*
tolabelprox	{ W }	above, below, left, right, inside, or outside; CTR, N, S, E, W, NE, NW, SW, or SE
tolabelctr	{ no }	yes or no
tolabeladjust	{ 0 0 }	any *point*

Here is the complete list of options to the @Tree symbol:

@Tree
treehindent	{ ctr }	left, ctr, right, or any length from Section 1.2

The @HTree option has a similar treevindent option, which may be top, ctr, foot, or any length from Section 1.2.

The @Diag symbol and to the @DiagSetup setup file symbol have all of the options of @Node, @Link, @Tree, and @HTree. They also have the following options:

@Diag
maxlabels	{ 200 }	any whole number
save	{ no }	no or yes
treehsep	{ 0.5f }	any length from Section 1.2
treevsep	{ 0.5f }	any length from Section 1.2

The following lists define all the ways to specify numbers, lengths, angles, points, and booleans. Brief explanations appear to the right, with the symbols' precedences in parentheses.

number
–27.56	or any literal number
sqrt *number*	square root (99)
abs *number*	absolute value (99)

ceiling *number*	least integer greater than or equal to (99)
floor *number*	greatest integer less than or equal to (99)
truncate *number*	delete fractional part (99)
round *number*	round to nearest integer (99)
sin *angle*	sine of angle measured in degrees (99)
cos *angle*	cosine of angle measured in degrees (99)
number atan *number*	arc tangent of first over second (98)
number exp *number*	first number raised to second number (98)
number log *number*	logarithm of second number to base first (98)
number rand *number*	random real number in this range inclusive (98)
number max *number*	the larger of two numbers (98)
number min *number*	the smaller of two numbers (98)
number * *number*	the product of two numbers (97)
number / *number*	real-valued division (96, left associative)
length / *length*	the ratio of two lengths (96, left associative)
angle / *angle*	the ratio of two angles (96, left associative)
number idiv *number*	integer division of two numbers (96, left associative)
number mod *number*	integer remainder when first divided by second (96)
number + *number*	sum of two numbers (96, left associative)
+ *number*	identity operation (96)
number – *number*	difference of two numbers (96, left associative)
– *number*	negation (96)
sides	(outline only) value of the node's sides option

length

0	zero
xsize	(outline only) distance to right boundary
ysize	(outline only) distance to top boundary
xmark	(outline only) distance to column mark
ymark	(outline only) distance to row mark
margin	(outline only) value of the node's margin option
shadow	(outline only) value of the node's shadow option
number i	*number* inches (100)
number c	*number* centimetres (100)
number p	*number* points (100)
number m	*number* ems (100)
number s	1s is the current width of a space (100)
number v	1v is the current inter-line space (100)
number f	1f is the size of the current font (100)
xcoord *point*	the *x* coordinate of the point (99)
ycoord *point*	the *y* coordinate of the point (99)
abs *length*	absolute value (99)

length rand *length*	random real length in this range inclusive (98)
length max *length*	the larger of two lengths (98)
length min *length*	the smaller of two lengths (98)
point distance *point*	(non-negative) distance between two points (98)
length * *number*	length multiplied by number (97)
number * *length*	length multiplied by number (97)
length / *number*	length divided by number (96, left associative)
length + *length*	sum of two lengths (96, left associative)
+ *length*	identity operation (96)
length – *length*	difference of two lengths (96, left associative)
– *length*	negation (96)

angle

number d	*number* degrees (100)
number	*number* degrees (d is optional) (100)
parallel	(labelangle options only) angle parallel to curve at label point
antiparallel	(labelangle options only) angle antiparallel to curve at label point
perpendicular	(labelangle options only) angle perpendicular to curve at label point
antiperpendicular	(labelangle options only) angle antiperpendicular to curve at label point
label??ANGLE	angle parallel to curve at *label* if known, else 0d (99)
anglefix *angle*	*angle* normalized to between 0d inclusive and 360d exclusive (99)
abs *angle*	absolute value (99)
length atan *length*	arc tangent of first over second (98)
point angleto *point*	angle from first point to second (98)
angle rand *angle*	random angle in this range inclusive (98)
angle max *angle*	the larger of two angles (98)
angle min *angle*	the smaller of two angles (98)
angle * *number*	angle multiplied by number (97)
number * *angle*	angle multiplied by number (97)
angle / *number*	division of angle by number (96, left associative)
angle + *angle*	sum of two angles (96, left associative)
+ *angle*	identity operation (96)
angle – *angle*	difference of two angles (96, left associative)
– *angle*	negation (96)
angle	(outline only) value of the node's angle option

point

label	a previously defined label
any??*label*	*any*@*label* if sensible, else *any* (99)
prev	the previous point in a shape
length atangle *angle*	point at distance and angle from origin (89)
point/tag boundaryatangle *angle*	*point*, or point on boundary of *tag* at *angle* (89)
point ** *number*	multiplication of point by number (88)
point ++ *point*	vector sum of two points (87)
point –– *point*	vector difference of two points (87)
number, *number*	*x* and *y* coordinates with respect to base (70)
length *length*	*x* and *y* distance from origin (5)
from	(path only) the value of the link's from option
to	(path only) the value of the link's to option

boolean

number = *number*	=; also between lengths (79)
number != *number*	≠; also between lengths (79)
number == *number*	= between angles (79)
number !== *number*	≠ between angles (79)
number <= *number*	≤; also between lengths (79)
number < *number*	<; also between lengths (79)
number >= *number*	≥; also between lengths (79)
number > *number*	>; also between lengths (79)
not *boolean*	Logical not (78)
boolean and *boolean*	Logical and (77)
boolean or *boolean*	Logical or (76)
boolean xor *boolean*	Logical exclusive or (76)

A length is represented in PostScript by a single number on the operand stack; so is an angle. Therefore all number operations can be applied to lengths and angles as well, but the results will not always be useful. For example, rounding a length to the nearest integer is not a useful thing to do because the result depends on the basic unit (what does 1 equal as a length?) which is implementation-dependent and genuinely subject to change. Rounding the *ratio* of two lengths does make sense. The above is an attempt to list only the useful operations; but if you really need the logarithm of an angle, you can have it.

Angles are a little more amenable to this kind of thing because they are always measured in degrees. However, angles suffer from the problem that 0d is really the same angle as 360d. For this reason, separate equality and inequality operators for angles are provided which ignore multiples of 360d, and less than and similar relations are not defined for angles, because they inherently are not well defined. See also the anglefix symbol above.

A point is represented by two lengths (which are numbers) on the stack. Those familiar with PostScript and willing to sacrifice portability and increase their risk of error can therefore write, for example, *point* exch to obtain the reflection of a point about the main diagonal, and so on.

The following may have a result of any type, depending on their options. The options and

result may be a sequence of things as required in shapes, including [] and so forth.

```
if
   cond { boolean }
   then { anything }
   else { anything }

angle quadcase
   0 { anything }
   0-90 { anything }
   90 { anything }
   90-180 { anything }
   180 { anything }
   180-270 { anything }
   270 { anything }
   270-360 { anything }

number signcase
   neg { anything }
   zero { anything }
   pos { anything }

xloop from { number } to { number } by { number } do {
   anything
}

yloop from { number } to { number } by { number } do {
   anything
}

zloop from { number } to { number } by { number } do {
   anything
}
```

The if symbol returns then or else depending on the value of cond, and signcase returns neg, zero, or pos depending on whether *number* (which may also be an angle or a length) is negative, zero, or positive. The quadcase symbol decides whether the given angle points in one of the four horizontal or vertical directions, or into the quadrants between them, and returns the appropriate option. Don't be misled by the unorthodox option names; it is not possible to give your own ranges, only these ones.

The loops return a sequence of repetitions of *anything*; any occurrences of x in xloop will be replaced by the current value of the loop counter, and similarly for the other loops.

Symbols not covered in this summary are the retagging symbol :: (Section 9.4); the symbols available within the @Tree symbol (Section 9.6); and :<, :=, @ShowPoints, @ShowTags, and @ShowDirections from Section 9.9.

Chapter 10. Graphs

This chapter describes how to draw graphs, using the @Graph symbol. For example,

```
@Graph
   abovecaption { New South Wales road deaths, 1960--1990
(fatalities per 100 million vehicle km) }
{
   @Data  points { plus }  pairs { dashed }
   { 1963 5.6  1971 4.3  1976 3.7  1979 3.4  1982 2.9  1985 2.3  1988 2.0 }
}
```

produces the graph

New South Wales road deaths, 1960–1990
(fatalities per 100 million vehicle km)

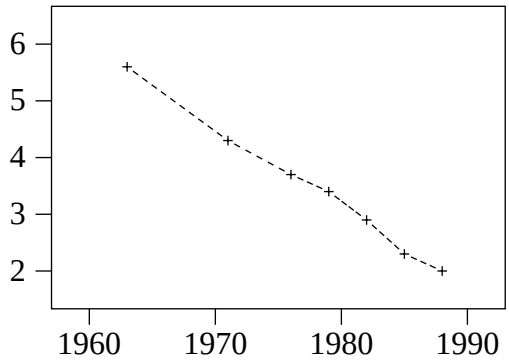

The features of @Graph include captions, automatic and manual ticks and labels, logarithmic axes, histograms, and plotting of mathematical functions.

10.1. Introduction

The Lout definitions for graph formatting are kept in a file called graph, which you must include at the start of your document if you want graphs, like this:

```
@SysInclude { graph }
@SysInclude { doc }
@Doc @Text @Begin
...
@End @Text
```

Setup files for specialized packages, such as graph, should be included before the main setup file. Once this is done, the @Graph symbol used below will then be available for use anywhere within

your document.

@Graph distinguishes between the overall graph, produced by the @Graph symbol itself, and the data sets to be placed within it, each of which is enclosed by a @Data symbol:

```
@CentredDisplay @Graph
{
   @Data  points { plus }
   { 1 1.10  2 1.21  3 1.33  4 1.46  5 1.61  6 1.77  7 1.95  8 2.14 }

   @Data  points { circle }
   { 1 1.20  2 1.44  3 1.73  4 2.07  5 2.45  6 2.99  7 3.58  8 4.30 }
}
```

Although it is good practice to lay the input data out neatly, layout has no effect on the result. It is not necessary to have one data point per line, for example. The result of this example is

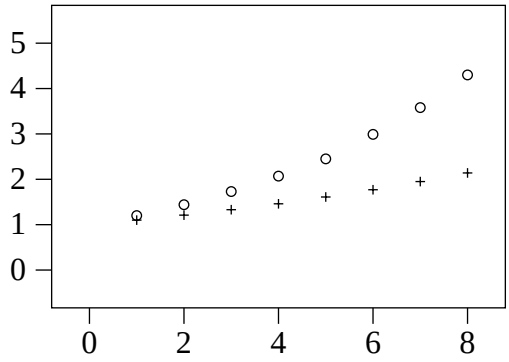

We have used the @CentredDisplay symbol from Section 2.1 to produce a centred display, but the @Graph symbol produces an object which may appear anywhere at all – in a figure, for example, or as an entry in a table.

10.2. Changing the overall appearance of the graph

The overall appearance of the graph is controlled by options to the @Graph symbol. As usual, these options follow the @Graph symbol, with their values enclosed in braces; they may appear in any order, and if omitted are assigned some sensible default value.

There is a style option for controlling the overall style of the graph, whose value may be either frame, none, or axes. The default value is frame, and it produces a frame around the graph with ticks and labels along its left and bottom edges, as in previous examples. The none style prints nothing (no frame, no ticks, no labels), which is useful for producing graphs that don't look like graphs, as it were.

If the other value, axes, is chosen, two other options called xorigin and yorigin become compulsory:

```
-2p @Font @Graph
   style { axes }
   xorigin { 0 }
   yorigin { 0 }
   width { 12 cm }
   height { 7 cm }
   leftcaption { 90d @Rotate { counts (%) } }
   leftgap { 1.0 cm }
   belowcaption { time (min) }
   belowgap { 0 cm }
{
   @Data
      points { filledsquare }
      pairs { solid }
   { 0 0.0 1 4.8 2 7.0 3 15.2 4 19.8 5 20.0 6 21.0 7 25.0
     10 29.5 15 31.2 20 35.0 30 40.0 60 50.8
   }

   @Data
      points { square }
      pairs { solid }
   {
     0 0.0 1 3.7 1.5 43.1 2 99.1 3 85.6 4 69.1 5 47.0 6 44.1 7 40.8
     10 35.0 15 29.4 20 25.0 30 21.1 60 15.5
   }
}
```

We have requested a smaller font size for this graph as a whole by preceding it with -2p @Font, meaning two points smaller, and we have used some other options which will be explained shortly. The resulting graph has an x axis and a y axis instead of a frame, like this:

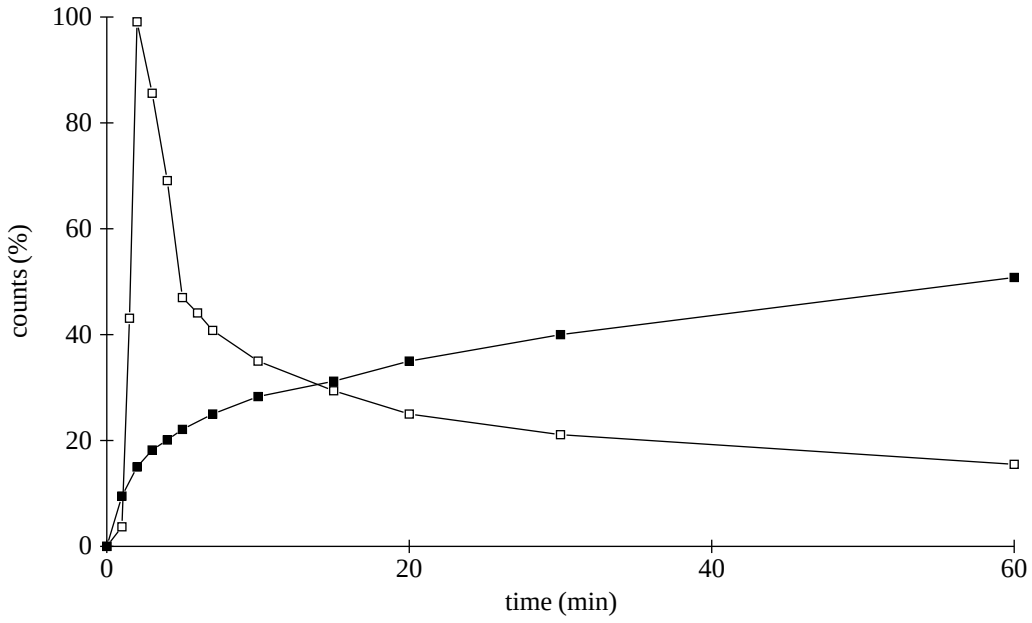

The point where the axes cross is (xorigin, yorigin).

Although @Graph does not provide explicit support for multiple axes, you can simulate them by overstriking two separate graphs of equal size. There is an @OverStrike symbol which overstrikes two objects, so

```
@Graph { ... } @OverStrike @Graph { ... }
```

will do the job. Typically one of the graphs would have y ticks, and the other would have r ticks (adjacent to the right-hand side of the frame).

There are xlog and ylog options which produce logarithmic x and y axes:

```
@Graph
   xlog { 10 }
   ylog { 10 }
{
   ...
}
```

The value is the base of the logarithm, usually 10 or 2, or none (the default) meaning not logarithmic. Logarithms to different bases differ only by a constant factor, so the main effect of different bases is on the choice of ticks and labels. An xlog option will be ignored if there are any negative or zero x data points, x ticks, or xorigin or xmin options; and similarly for ylog.

There are width and height options for setting the size of the total area enclosed:

```
@Graph
   width { 6.0 cm }
   height { 4.0 cm }
{
   ...
}
```

This shows the default width and height, six centimetres and four centimetres. These lengths and others discussed below can be specified using a variety of units of measurement (see Section 10.10 for the details).

Within the frame or axes, a small margin is kept free of data points. The size of this margin is controlled by xextra and yextra options:

```
@Graph
   xextra { 0.5 cm }
   yextra { 0.5 cm }
{
   ...
}
```

Setting xextra to 0.5 cm (the default value if the style option is frame) means that the smallest x value will be placed 0.5 centimetres to the right of the left boundary, and the largest will be placed 0.5 centimetres to the left of the right boundary. It is quite safe to set xextra to 0 cm if desired,

and indeed this is the default value when style is axes or none. The yextra option works in exactly the same way for y values.

The xdecreasing option plots the x values in decreasing order instead of increasing:

```
@Graph
   xdecreasing { yes }
   abovecaption { New South Wales road deaths, 1960--1990
(fatalities per 100 million vehicle km) }
{
   @Data
      points { plus }
      pairs { dashed }
   {
      1963 5.6  1971 4.3  1976 3.7  1979 3.4  1982 2.9  1985 2.3  1988 2.0
   }
}
```

produces

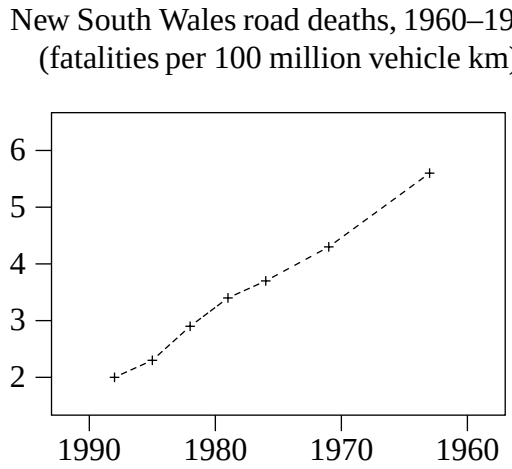

The value of xdecreasing should be either no (the default value) or yes. A similar ydecreasing option does the same thing to the y axis.

10.3. Captions

There are options for placing captions above, below, left, and right of the frame:

```
@Graph
   abovecaption { This appears above }
   belowcaption { This appears below }
   leftcaption { At left }
   rightcaption { At right }
{
}
```

produces

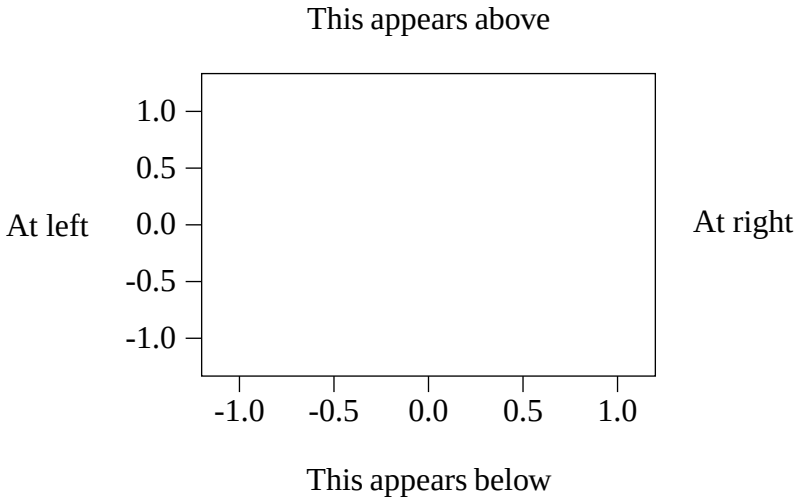

The captions may be arbitrary Lout objects, so may include equations, @Rotate, and so on. Each caption except rightcaption is printed in the clines @Break style, which means that multiple lines in one caption will be centred beneath each other. The rightcaption option uses the lines @Break style, in which the lines are left justified beneath each other. Incidentally, this example shows what happens if there is no data.

There are options for controlling the amount of space between each caption (when non-empty) and the frame. Here they are with their default values:

```
@Graph
   abovegap { 0.5 cm }
   belowgap { 0.5 cm }
   leftgap { 1.5 cm }
   rightgap { 0.5 cm }
{
   ...
}
```

This is particularly important in the case of leftgap (and rightgap if rticks is used), because Lout has no idea how wide the ticks and labels attached to the y axis are; 1.5 cm is just a wild guess and often needs adjustment. On the other hand, Lout does know how high the ticks and labels on the x axis are; it allows 1.7 times the current font size for them, and belowgap is additional to this.

When a graph is to be presented as a centred display, it is generally best if the centring is done with respect to the frame alone, not the captions, ticks, and labels. The hidecaptions option does this by making the left and right captions and gaps seem to Lout to have zero width:

```
@Graph
   hidecaptions { yes }
{
   ...
}
```

Actually yes has been made the default value, since the vast majority of graphs are centred displays. In the rare cases where this feature is not wanted (for example, if a graph appears as an entry in a table), use hidecaptions { no }. The y and r ticks and labels seem to Lout to have zero width already, so do not need to be hidden.

10.4. Ticks and labels

Ticks are the short lines that mark off intervals along the axes, and *labels* are the numbers appearing near the ticks (not to be confused with captions). @Graph produces ticks and labels automatically with some care, so it is probably best not to worry about them unless the result is not pleasing, in which case there are options for controlling them.

One simple way to control the production of x ticks is with the xmin, xmax, and xticksep options to @Graph. For example,

```
@Graph
   xmin { 0 }
   xmax { 5 }
   xticksep { 0.5 }
```

specifies that x values in the range 0 to 5 are to be expected, and that a tick and label is to appear every 0.5 units along the x axis. One or both of xmin and xmax may be omitted, in which case suitable values will be inferred from the data as usual.

Alternatively, complete control over the appearance of x ticks and labels is provided by the xticks option. For example,

```
@Graph
   xticks { 0@  5  10@  15  20@ }
```

specifies that x ticks are to be drawn at 0, 5, 10, 15, and 20. An @ following a number indicates that a label is to be printed as well, so the above example will produce labels at 0, 10, and 20. For even finer control, @ may be replaced by a label enclosed in parentheses:

```
@Graph
   xticks { 1 (Democrat)  2 (Republican)  3 (Other) }
```

As this example shows, a label does not have to be a number; it can be any string of characters, including spaces and balanced parentheses; but it may not be an arbitrary Lout object.

The character ^ in a label indicates that the remainder is to be treated as an exponent:

```
@Graph
   xlog { 10 }
   xticks { 1 (1)  10 (10)  100 (10^2)  1000 (10^3)  10000 (10^4)  100000 (10^5) }
{
   @Data points { plus }
   { 1 2.1  10 3.4  100 4.9  1000 6.1  10000 7.2  100000 7.6 }
}
```

In fact, the labels inserted automatically when xticks is omitted have exponents when the axis is logarithmic, so xticks is hardly necessary in this example. Anyway the result is

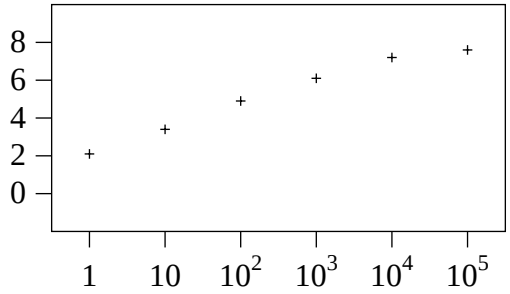

Setting xticks to empty produces no x ticks (this is not the same as omitting xticks).

Similar options control ticks and labels on the y axis: ymin, ymax, yticksep, and yticks. There are also xticklength and yticklength options which set the length of ticks:

```
@Graph
   xticklength { 0.5 ft }
   yticklength { 0.5 ft }
```

shows the default values, half the current font size in both cases.

There is also an rticks option which is similar to yticks except that the ticks it controls appear on the right-hand side of the frame (this option is relevant only when the style option is frame). Unlike xticks and yticks, rticks has empty default value, which is why you don't usually see r ticks. They are most useful when overstriking two graphs using @OverStrike as explained earlier; one graph will have y ticks in the usual way, the other will have r ticks and empty y ticks:

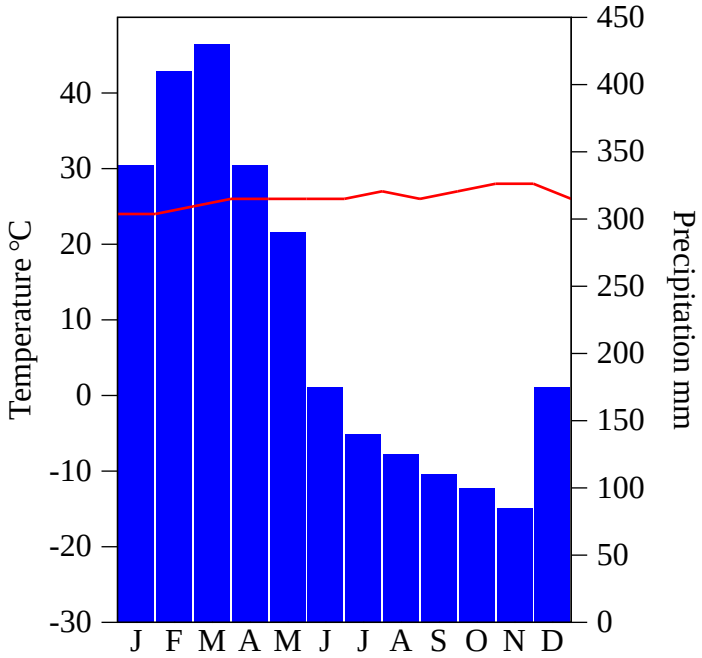

Here the first graph has

```
rticks { 0@ 50@ 100@ 150@ 200@ 250@ 300@ 350@ 400@ 450@ }
yticks {}
```

for its ticks.

Lout has only a hazy idea of how much space is occupied by ticks and labels. Unless xticks is empty, Lout allows 1.7 times the current font size below the graph for x ticks and labels, which is usually about right; but it does not allow any space for y and r ticks and labels since it has no idea how wide the labels will be. The discussion of captions in Section 10.3 explains how to use the leftgap and rightgap options to work around this deficiency.

10.5. Changing the appearance of the data

The @Data symbol has options for controlling the appearance of its data. We have already seen the points option, which controls what is printed at each data point:

cross	×	plus	+
square	□	filledsquare	■
diamond	◇	filleddiamond	◆
circle	○	filledcircle	●
triangle	△	filledtriangle	▲

If the points option is omitted or empty, nothing is printed. The symbols are centred over the data point. There is a symbolsize option which controls the size (radius) of all these symbols:

```
@Data
   symbolsize { 0.15 ft }
```

shows the default, 0.15 times the current font size. More precisely, the default value is taken from an option to the @Graph symbol, also called symbolsize. By setting that option you can therefore set the symbol size of all data points in the graph at once; its default value is 0.15 ft.

The @Data symbol also has a pairs option which determines how each pair of points is connected. The choices are none (not connected, the default), solid (a solid line), dashed (a dashed line), or dotted (a dotted line). For example,

```
@Graph
   abovecaption { Estimated population of Boston, New York, and Philadelphia }
{
   @Data  points { plus }  pairs { solid }
   { 1720 12000  1730 13000  1740 15601  1760 15631  1770 15877 }

   @Data  points { plus }  pairs { dashed }
   { 1720 7000  1730 8622  1740 10451  1750 14255  1760 18000  1770 22667 }

   @Data  points { plus }  pairs { dotted }
   { 1720 10000  1730 11500  1740 12654  1750 18202  1760 23750  1770 34583 }
}
```

produces

Estimated population of Boston, New York, and Philadelphia

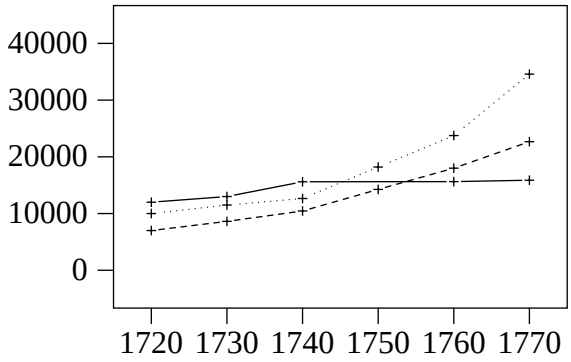

(R. C. Simmons, *The American Colonies*, W. W. Norton, New York, 1981.) We will see in Section 10.8 how to add an explanatory key to this graph. If the points have symbols, these connecting lines will stop 1.5 symbolsizes away from the data points, so as not to overstrike them. If the points have no symbols and pairs is dashed, the first and last dash in each segment will have half the length of the others.

A dashlength option controls the length of dashes and also the separation between dots, and a linewidth option controls the width (thickness) of the lines and dots:

```
@Data
   dashlength { 0.2 ft }
   linewidth { 0.5 pt }
{
   ...
}
```

This shows the default values, 0.2 ft for dashlength and 0.5 pt (half a point) for linewidth. Actually the default value for linewidth is whatever happens to be already in use, but Lout sets line widths to half a point initially. This option also controls the separation between bars in histograms.

The pairs option is also used for producing histograms, like this:

```
@Graph
   hidecaptions { yes }
   abovecaption { Computer Science 3 Results (1993) }
   leftcaption { Number of
students }
   belowcaption { Final mark (%) }
   yextra { 0 cm }
   ymax { 80 }
{
   @Data pairs { yhisto }
   { 0 1 10 3 20 2 30 4 40 15 50 60 60 58 70 28 80 15 90 7 100 0 }
}
```

which has result

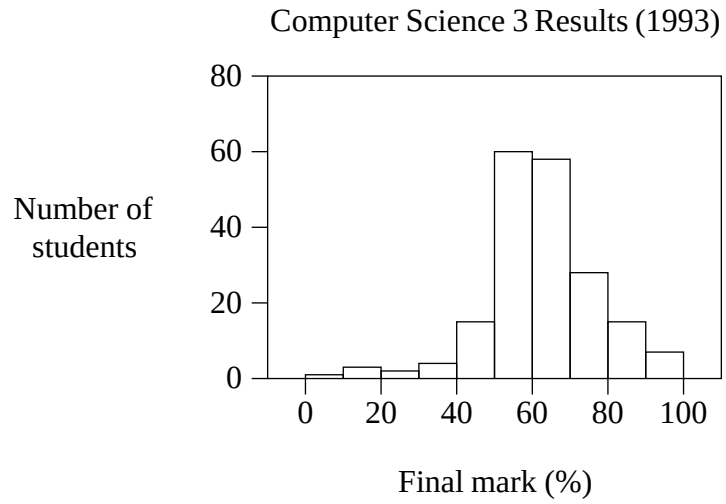

Note carefully that one y histogram rectangle occupies the space from one x value to the next, with height equal to the y value lying between these two x values. This means that the very last y value has no effect on the result (however, there must be a last y value anyway).

There is an alternative to yhisto called surfaceyhisto:

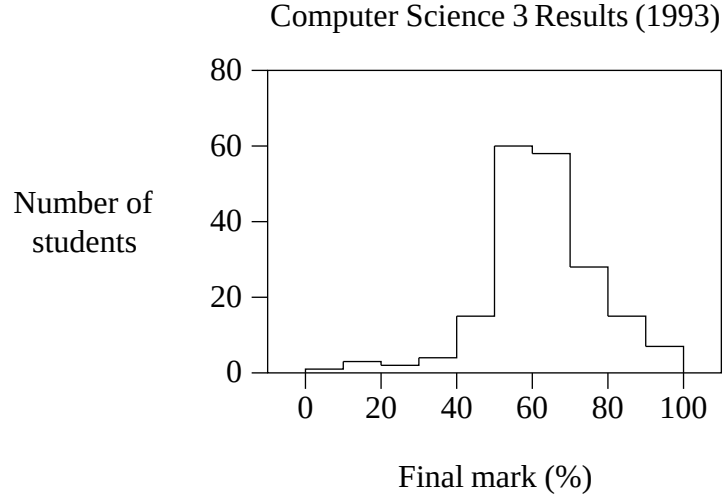

As you can see, surfaceyhisto draws just the surface of the histogram, not the descending lines.

There are xhisto and surfacexhisto values of pairs which produce a histogram whose bars are parallel to the x axis. There are also filledyhisto and filledxhisto values which produce filled rectangles rather than outlined ones:

```
@Graph
   abovecaption { Fertility rates in some developing countries }
   xextra { 0 cm }
   yextra { 0 cm }
   xmax { 8 }
   yticks {
      1.5 (Turkey) 2.5 (Thailand)
      3.5 (Indonesia) 4.5 (Costa Rica)
      5.5 (Colombia) 6.5 (Cameroon)
      7.5 (Botswana) 8.5 (Bangladesh)
   }
   yticklength { 0 cm }
{
   @Data
      pairs { filledxhisto }
   { 0 1 3.2 2 2.2 3 3.0 4 3.5 5 2.8 6 5.9 7 4.8 8 5.3 9 }
}
```

produces

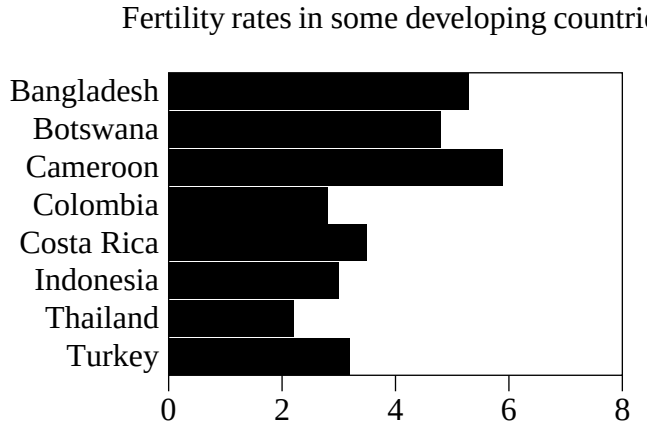

(Bryant Robey, Shea O. Rutstein, and Leo Morros: The fertility decline in developing countries, *Scientific American*, December 1993.) Once again each bar goes from one y value to the next, with its x value equal to the x value lying between the two y values; this time the very first x value has no effect on the result.

The colour of one set of data can be changed with a colour option:

```
@Data
   colour { blue }
```

For the complete list of acceptable colour names, see Section 8.1. The colour option's name may also be spelt color.

It is also possible to paint the area between the data points and the x axis (or frame if style is not axes), using

```
@Data
   paint { yes }
```

The paint colour is determined by the colour option just introduced; it will be black if no colour is specified. Paint (including white paint) hides paint, points, and lines drawn by previous data sets. However the points and lines of each data set are drawn after painting that set, so they cannot be hidden under their own paint; and axes and frames are drawn last so that they too are never hidden.

A dataformat option is provided for changing the interpretation of the data. Ordinarily, as we know, the numbers are taken to be pairs of x and y coordinates, like this:

```
@Data
{
   x y  x y  ...  x y
}
```

However, by setting dataformat to yonly, the interpretation is changed to a sequence of y coordinates only:

```
@Data
   dataformat { yonly }
{
   y y  ...  y
}
```

and x values 1, 2, and so on are inserted automatically, just as though the original input had been

```
@Data
{
   1 y  2 y  ...
}
```

There is also xonly, which inserts y values 1, 2, and so on. The default value, xandy, gives the usual interpretation. The layout of data on lines has no effect on the interpretation.

10.6. Placing arbitrary objects on the graph

As we have just seen, the repertoire of symbols that @Data is able to place on the graph is quite limited. However, there is a way to place any number of arbitrary Lout objects anywhere on the graph, using the objects option to the @Graph symbol:

```
@Graph
   objects {
      @CTR at {2.5  6.0}  @Eq { y = x sup 2 }
      @CTR at {4.5  7.0}  @Eq { y = x sup 3 }
   }
```

where we have used the @Eq symbol from Chapter 7 twice to place two equations onto the graph at the points 2.5 6.0 and 4.5 7.0 respectively. An example result appears in the next section.

In addition to @CTR, there are eight other symbols which may be used within the objects option in the same way: @NW, @SW, @SE, @NE, @N, @W, @S, and @E. These place the object just to the northwest of the point, to the southwest, and so on instead of centring it over the point. By 'to the northwest' we mean that the object's bottom right corner coincides with the point, and similarly for the other symbols.

Each of these symbols has a margin option which enlarges the object by adding a margin around it before placing it:

```
@NW at {2.5  6.0} margin { 0.3 ft }  @Eq { y = x sup 2 }
```

shows the default value, 0.3 times the current font size. As the margin is increased, the object moves further away from the point.

The major advantage of the objects option over the @Data symbol is that arbitrary Lout objects may be used. The @Data symbol however is able to place many copies of its symbols onto the graph, and also allow for them when connecting points together with lines. Also, the points within the objects option are not taken into account when deciding on the permissible range of x and y values, whereas the points within the @Data symbol are. Altogether it seems best to use the @Data symbol for the bulk of the data points, and to use the objects option for adding a small number of labels or other decorations.

The objects option may contain @Graph symbols, but in that case, owing to a deficiency in the implementation, those symbols will need to have their save options (Section 10.9) set to yes.

10.7. Mathematical functions, loops, and tests

@Graph offers quite a large selection of mathematical functions, available everywhere that x and y coordinates are required: within the xticks and yticks options, within the points within the objects option, and within the right parameter of the @Data symbol. For example,

```
@Data
   pairs { solid }
{
   0 0  pi sin { pi/2 }
}
```

draws a solid line from $(0, 0)$ to $(\pi, \sin(\pi/2))$. Section 10.10 lists all the functions; they include the four arithmetical operators $+$, $-$, $*$, and $/$, as well as sin, cos, sqrt, and many others. Braces are used for grouping, never parentheses.

For plotting functions there are three looping symbols, xloop, yloop, and zloop. For example, the following plots the two functions $y = 2$ and $y = \sqrt{\pi x/4} + 1$ for x from 10 to 500:

```
-2p @Font @Graph
   style { axes }
   xorigin { 0 }
   yorigin { 0 }
   width { 8 cm }
   xticks { 10@ 50@ 100@ 200@ 500@ }
   objects {  @NE at { 300 2 } @I { Exponential }
            @SE at { 300 sqrt { pi*300/4 } + 1 } @I { Uniform } }
   belowcaption { @I n }
   belowgap { 0 cm }
   leftcaption { Right shell nodes }
{
   @Data points { filledcircle }
   { 10 1.97  50 2.01  100 2.00  200 2.0  500 2.00 }

   @Data points { filledcircle }
   { 10 3.53  50 7.45  100 9.32  200 13.41  500 21.63 }

   @Data pairs { dashed }
   { 10 2  500 2 }

   @Data pairs { dashed }
   {
      xloop from { 10 } to { 500 } by { 20 } do
      {
         x  sqrt { pi*x / 4 } + 1
      }
   }
}
```

The do option of xloop is replicated repeatedly with each occurrence of x replaced by 10, 30, 50, … up to 490. The result is[1]

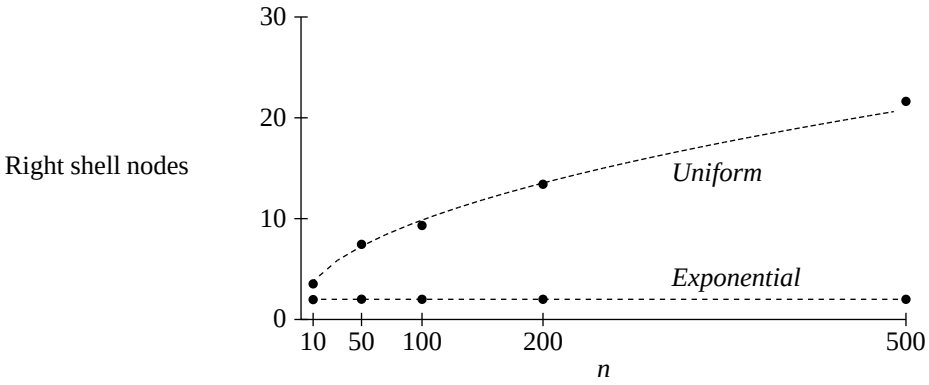

The points are connected by straight line segments as usual, but a smallish by option of about

[1] Source: Jeffrey H. Kingston, Analysis of tree algorithms for the simulation event list. *Acta Informatica* **22**, pp. 15–33 (1985).

one-twentieth of the range creates the illusion of a smooth curve quite well.

There is also an if symbol which produces alternative results, depending on whether a condition evaluates to true or false:

```
xloop from { -5 } to { +5 } by { 0.2 } do
{
   if cond { abs { x } > 0.1 } then { x 1/x } else {}
}
```

This plots the function $y = 1/x$, skipping points near zero. Actually the else part could be omitted since its default value is empty.

Adventurous users might enjoy nesting a yloop or zloop within an xloop, or using loops to generate ticks, like this:

```
xticks {
   xloop from { 0 } to { 20 } do
   {
      x if cond { x mod 5 = 0 } then { @ }
   }
}
```

The missing by option defaults to 1, so this produces x ticks at 0, 1, 2, …, 20, with labels at 0, 5, 10, 15, and 20. It is quite all right to mix @ and even labels in with numbers, as long as the final result obeys the rules of Section 10.4.

You can define your own functions using Lout definitions, placed in your mydefs file as explained in Section 2.12. Here is an example of a function definition:

```
import @Graph @Data
def @Tan
   precedence 40
   right x
{
   sin x / cos x
}
```

This defines a function called @Tan which implements the trigonometric tangent function. It may then be used in expressions just like any other function:

```
@Data {
   yloop from { 0 } to { 0.95 } by { 0.05 } do
   {
      y   @Tan { y / pi }
   }
}
```

Following is a detailed explanation.

The first line, import @Graph @Data, is the import clause. Its function is to grant the

definition access to the three previously defined functions (symbols) that it uses, namely sin, cos, and /. These are found within the @Data symbol within @Graph.

After the import clause comes the def keyword, meaning 'define,' and then the name of the symbol being defined, in this case @Tan. We have chosen @Tan rather than tan because symbols defined by the user in this way are visible throughout the document, and we do not want the literal word tan to be taken as a symbol.

Next comes the symbol's precedence, in this case the same as sin and cos (see Section 9.11 for the precedence of each symbol). Next is a list of the formal parameters, in this case just one, called x, that is to be passed on the right.

Finally comes the body of the definition enclosed in braces. When @Tan is invoked, its value will be this body with each occurrence of the formal parameter x replaced by the object following the @Tan symbol. For example, the do option of the yloop above becomes

```
y   sin { y / pi } / cos { y / pi }
```

as you would expect.

10.8. Adding a key to the graph

A *key* to a graph is an explanation of what each data set represents. To assist you in constructing a key, some extra symbols are provided in addition to @Graph:

@GraphCross	×	@GraphPlus	+
@GraphSquare	□	@GraphFilledSquare	■
@GraphDiamond	◇	@GraphFilledDiamond	◆
@GraphCircle	○	@GraphFilledCircle	●
@GraphTriangle	△	@GraphFilledTriangle	▲

@GraphNoLine	
@GraphSolid	—
@GraphDashed	- - -
@GraphDotted	·····

These extra symbols may be used anywhere in your document except within the right parameter of @Graph; they are commonly used within the caption options of @Graph:

```
@Graph
   rightcaption {
@GraphPlus @GraphSolid @GraphPlus  Boston
@GraphPlus @GraphDashed @GraphPlus  New York
@GraphPlus @GraphDotted @GraphPlus  Philadelphia
}
```

Recall that unlike the other captions, rightcaption is set using the lines @Break style rather than clines @Break (Section 10.3). Adding this caption to the graph from Section 10.5, the complete result is

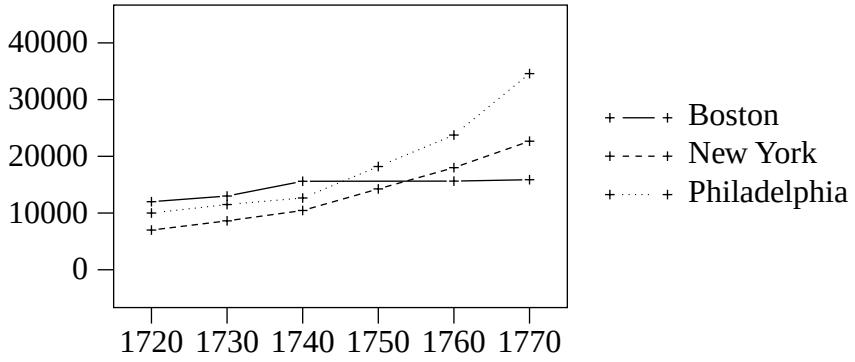

The first eight symbols have a symbolsize option with the usual meaning and the usual default value (0.15 ft). The last four symbols have dashlength and linewidth options with the usual default values, 0.2 ft and 0.5 pt respectively, and a length option, which determines the length of the line drawn by each symbol; its default value is 1.0 ft.

10.9. Errors

Lout normally produces output that will print without mishap on any PostScript device. However, some of the options of @Graph and all of the data and labels are passed through Lout without checking. Any errors in this material will not be detected until the file is printed.

The most likely errors are *rangecheck errors*, for example if an attempt is made to divide by zero or take the square root of a negative number, and *undefined errors*, arising from symbols misspelt, use of x outside an xloop, etc. Less commonly, everything may be correct but the graph is too large in some way: too much data, expression too deeply nested, and so on.

When an error is detected, @Graph arranges for the offending page to be printed up to the point where the error occurred, with a message nearby describing the error. Printing of the document is then aborted. The problem is usually easy to locate since it lies in whatever should have been printed next.

If you see VMerror in an error message, it means that the printer has run out of memory. All the data is stored in the printer while the graph is being printed, and it remains there until the end of the current page, when it is discarded and all memory consumed by the graph is reclaimed. If you do run out of memory, one option is to try

```
@Graph
   save { yes }
...
```

This causes the memory used by the graph to be reclaimed as soon as the graph is printed, which might well solve your problem if you have several graphs on one page. However, if the graph is nested inside some other major Lout package, notably @Diag, this option could cause PostScript errors in that package.

10.10. Summary

The options to the @Graph symbol, their default values, and their possible values are:

@Graph

style	{	frame	}	frame, axes, or none
width	{	6.0 cm	}	any *distance*
height	{	4.0 cm	}	any *distance*
xextra	{	0.5 cm	}	any *distance* (axes and none default is 0 cm)
yextra	{	0.5 cm	}	any *distance* (axes and none default is 0 cm)
xdecreasing	{	no	}	yes or no
ydecreasing	{	no	}	yes or no
leftcaption	{		}	any Lout object
rightcaption	{		}	any Lout object
abovecaption	{		}	any Lout object
belowcaption	{		}	any Lout object
leftgap	{	1.5 cm	}	any *distance*
rightgap	{	0.5 cm	}	any *distance*
abovegap	{	0.5 cm	}	any *distance*
belowgap	{	0.5 cm	}	any *distance*
hidecaptions	{	yes	}	yes or no
xorigin	{	none	}	none or any *number*
yorigin	{	none	}	none or any *number*
xlog	{	none	}	none or any *number* greater than 1
ylog	{	none	}	none or any *number* greater than 1
xmin	{	none	}	none or any *number*
xmax	{	none	}	none or any *number*
ymin	{	none	}	none or any *number*
ymax	{	none	}	none or any *number*
xticksep	{	none	}	none or any *number* greater than 0
yticksep	{	none	}	none or any *number* greater than 0
rticksep	{	none	}	none or any *number* greater than 0
xticks	{	auto	}	*sequence* (of numbers and strings), or auto meaning automatic
yticks	{	auto	}	*sequence* (of numbers and strings), or auto meaning automatic
rticks	{		}	*sequence* (of numbers and strings), or auto meaning automatic
xticklength	{	0.5 ft	}	any *distance*
yticklength	{	0.5 ft	}	any *distance*
rticklength	{	0.5 ft	}	any *distance*
objects	{		}	sequence of @CTR, @NW, @SW, @SE, @NE, @N, @W, @S, @E symbols
points	{	none	}	none, plus, cross, square, filledsquare, diamond, filleddiamond, circle, filledcircle, triangle, filledtriangle
pairs	{	none	}	none, solid, dashed, dotted, yhisto, xhisto, filledyhisto, filledxhisto, surfaceyhisto, surfacexhisto
colour/color	{	none	}	none or any colour name from Section 8.1
paint	{	no	}	no or yes
dataformat	{	xandy	}	xandy, yonly, xonly
dashlength	{	0.2 ft	}	any *distance*
linewidth	{	0.5 pt	}	any *distance*
symbolsize	{	0.15 ft	}	any *distance*

Number means an ordinary decimal number; *distance* means a number followed by at least one space followed by any one of the following units of measurement:

cm	centimetres
in	inches
em	Ems (12 ems = 1 inch)
pt	Points (72 points = 1 inch)
ft	1 ft is the size of the current font
sp	1 sp is the width of the space character in the current font
vs	1 vs is the current inter-line spacing

In general, numbers denote x or y values while distances denote lengths on the printed result.

The minimum plottable x value is the minimum of all the x data, xticks, xorigin, xmin, and xmax whenever these are not none. If xticks is none, this minimum may be reduced further to a 'round' number. The maximum plottable x value is the maximum of the same values, and it may be increased further if xticks is none. Similar remarks apply to y values.

The value of the objects option is a sequence of zero or more of the following:

@CTR	at { *expression expression* }	*object*
@NW	at { *expression expression* }	*object*
@SW	at { *expression expression* }	*object*
@SE	at { *expression expression* }	*object*
@NE	at { *expression expression* }	*object*
@N	at { *expression expression* }	*object*
@W	at { *expression expression* }	*object*
@S	at { *expression expression* }	*object*
@E	at { *expression expression* }	*object*

where *object* is an arbitrary Lout object. Each of these nine symbols also has a margin option whose value may be any non-negative distance, with default value 0.3 ft.

The options to the @Data symbol, their default values, and their possible values are:

@Data

points	{ *inherited* }	none, plus, cross, square, filledsquare, diamond, filled-diamond, circle, filledcircle, triangle, filledtriangle
pairs	{ *inherited* }	none, solid, dashed, dotted, yhisto, xhisto, filledyhisto, filledxhisto, surfaceyhisto, surfacexhisto
colour/color	{ *inherited* }	none, or any colour name from Section 8.1
paint	{ *inherited* }	no or yes
dataformat	{ *inherited* }	xandy, yonly, xonly
dashlength	{ *inherited* }	any *distance*
linewidth	{ *inherited* }	any *distance*
symbolsize	{ *inherited* }	any *distance*

{ *sequence* }

Inherited means that the default value is taken from the @Graph option with the same name.

The right parameter of @Data contains a *sequence* of zero or more *expressions.* The xticks, yticks, and rticks options also are sequences, which may contain @ and labels as well as expressions. An *expression* is any of the following (operators are shown in decreasing precedence order, with the precedence, if relevant, at right):

number	
x (within xloop only)	
y (within yloop only)	
z (within zloop only)	
pi	
e	
{ *expression* }	
sqrt *expression*	40
abs *expression*	40
ceiling *expression*	40
floor *expression*	40
truncate *expression*	40
round *expression*	40
cos *expression*	40
sin *expression*	40
expression atan *expression*	39
expression exp *expression*	38
expression log *expression*	37
expression rand *expression*	36
expression ∗ *expression*	35
expression / *expression*	34
expression idiv *expression*	34
expression mod *expression*	34
expression – *expression*	33
– *expression*	33
expression + *expression*	32
+ *expression*	32
if cond { *boolean* } then { *expression* } else { *expression* }	

A – immediately followed by a digit or decimal point is always taken to be a minus sign, never a subtraction. The left parameter of exp and log is the base of the exponentiation and logarithm respectively; idiv is integer division; and rand returns a uniform random integer lying between its two parameters (inclusive). Now a *sequence* is zero or more of the following:

@	(within xticks, yticks, and rticks only)
(*label*)	(within xticks, yticks, and rticks only)
expression	
xloop from { *expression* } to { *expression* } by { *expression* } do { *sequence* }	
yloop from { *expression* } to { *expression* } by { *expression* } do { *sequence* }	
zloop from { *expression* } to { *expression* } by { *expression* } do { *sequence* }	
if cond { *boolean* } then { *sequence* } else { *sequence* }	

The by part of the loop symbols is optional with default value 1; the else part of if is optional with default value equal to the empty sequence. A *boolean* is any one of the following things, again shown in decreasing precedence order, with the precedence at right:

true	
false	
{ *boolean* }	
expression = *expression*	30
expression != *expression*	30
expression < *expression*	30
expression <= *expression*	30
expression > *expression*	30
expression >= *expression*	30
not *boolean*	25
boolean and *boolean*	24
boolean xor *boolean*	23
boolean or *boolean*	22
if cond { *boolean* } then { *boolean* } else { *boolean* }	

Chapter 11. C and C++ Programs

This chapter describes how to typeset C and C++ program text using the @CP symbol in conjunction with the c2lout filter. The @CP symbol looks after printing keywords in bold, variables in italic, and so on, depending on a style you choose. It does not lay out programs in the sense of choosing indenting, it preserves the layout you give to the program. From now on, 'C' means 'C or C++' wherever it occurs.

It is possible to simply print out one or more C files; we call this *stand-alone mode*. Alternatively, the C program text may be printed as part of a larger Lout document; we call this *embedded mode*.

11.1. Stand-alone mode

Printing of C files in stand-alone mode is accomplished by the following Unix pipeline:

```
c2lout options C-files | lout -s > out.ps
```

As usual with Lout, the output will be a PostScript file. Each input file will begin on a new page of the output, starting with its name in bold type. The options provide control over the final appearance, as follows:

-p*style* Select a printing style. Your choices are -pfixed, -pvarying, and -psymbol, with the default being -pfixed. Consult Section 11.2 for examples of these styles.

-n Do not print file names.

-f*font* Select a Lout font family. The default is -fCourier for -pfixed, and -fTimes for -pvarying and -psymbol.

-v*vsize* Select an inter-line spacing size in Lout units. The default is -v1.1fx meaning 1.1 times the font size measured from baseline to baseline.

There are also -t and -T options for dealing with tab characters (Section 11.5).

11.2. Embedded mode

When the C program texts are to be embedded in a larger Lout document, the procedure is somewhat different. You need to include the cprint setup file, like this:

```
@SysInclude { cprint }
@SysInclude { doc }
@Doc @Text @Begin
...
@End @Text
```

This file includes everything needed to set up for C program formatting.

The C parts of the document are enclosed in @CP { ... } like this:

```
@IndentedDisplay @CP {
#include <stdio.h>

treeprint(p)       /* print tree p recursively */
struct tnode *p;
{
      if (p != NULL) {
            treeprint(p->left);
            printf("%4d %s\n", p->count, p->word);
            treeprint(p->right);
      }
}
}
```

Although C programs violate the rules of legal Lout input in many ways, these rules are suspended by the @CP symbol, allowing the C text to be incorporated with absolutely no modifications. The result is

```
#include <stdio.h>

treeprint(p)        /* print tree p recursively */
struct tnode *p;
{
        if (p != NULL) {
                treeprint(p->left);
                printf("%4d %s\n", p->count, p->word);
                treeprint(p->right);
        }
}
```

We have chosen to use the @IndentedDisplay symbol from Section 2.1 to obtain an indented display, but in fact @CP may appear anywhere at all. When including a C text within a paragraph, use @OneCol @CP { ... } to prevent it being broken across two lines, if desired.

In cases where the C text has unbalanced braces, it is necessary to use the alternative form @CP @Begin ... @End @CP so that Lout does not confuse C braces with Lout braces.

The @CP symbol has a style option for changing the printing style. The default value of style is fixed, which produces the style shown above. To obtain a varying-width font style, use style { varying } like this:

```
@CP
   style { varying }
{
#include <stdio.h>

treeprint(p)       /* print tree p recursively */
struct tnode *p;
{
      if (p != NULL) {
            treeprint(p->left);
            printf("%4d %s\n", p->count, p->word);
            treeprint(p->right);
      }
}
}
```

The result in this case will be

```
#include <stdio.h>

treeprint(p)       /* print tree p recursively */
struct tnode *p;
{
      if (p != NULL) {
            treeprint(p->left);
            printf("%4d %s\n", p->count, p->word);
            treeprint(p->right);
      }
}
```

There is also a third style called style { symbol } which is similar to varying except that it uses characters from the Adobe Symbol font to produce a more mathematical-looking result:

```
#include <stdio.h>

treeprint(p)       /* print tree p recursively */
struct tnode *p;
{
      if (p ≠ NULL) {
            treeprint(p→left);
            printf("%4d %s\n", p→count, p→word);
            treeprint(p→right);
      }
}
```

The @CP symbol has additional options which allow a finer control over the style. Here they all are, with their default values:

```
@CP
   style { fixed }
   font { Courier }
   strings { Base }
   identifiers { Base }
   comments { Base }
   keywords { Base }
   numbers { Base }
   operators { Base }
   size { -1.0p }
   line { 1.0vx }
   tabin { 8 }
   tabout { 8s }
{
   ...
}
```

We are already familiar with style. After that comes font, which determines the font family to use, followed by six options giving the particular faces within that family in which to print C strings, identifiers, comments, keywords, numbers, and operators. Base means the basic face; other commonly available choices are Slope and Bold. These options may all be set to different faces if desired. The default values shown are correct for style { fixed } only; the other styles have other defaults (Section 11.3).

The size option is the font size to use, and line is the inter-line spacing. The default values specify that size is to be one point smaller than in the surrounding document; this was done to compensate for Courier's relatively large appearance compared to other fonts of the same nominal size. Again, these defaults are different for different values of style.

The tabin and tabout options are the subject of Section 11.5.

11.3. Changing the default values

We have just seen that the @CP symbol has many options for changing the appearance of the C text. However, most people would not want to have a different style for every C text in their document; they want to define the style once at the start, and have all their C texts come out in that style without laboriously setting options on every @CP symbol. This is done by copying the setup file and changing it.

For general information about how to make your own setup file, consult Section 4.1. The options that determine the default values are in the @CPSetup @Use clause near the end of the cpsetup. setup file:

```
@Use {  @CPSetup
   # style                { fixed      }

   # fixedfont            { Courier    }
   # fixedstrings         { Base       }
   # fixedidentifiers     { Base       }
   # fixedcomments        { Base       }
   # fixedkeywords        { Base       }
   # fixednumbers         { Base       }
   # fixedoperators       { Base       }
   # fixedsize            { -1.0p      }
   # fixedline            { 1.0vx      }
   # fixedtabin           { 8          }
   # fixedtabout          { 8s         }

   # varyingfont          {            }
   # varyingstrings       { Slope      }
   # varyingidentifiers   { Slope      }
   # varyingcomments      { Base       }
   # varyingkeywords      { Bold       }
   # varyingnumbers       { Base       }
   # varyingoperators     { Base       }
   # varyingsize          { 1.0f       }
   # varyingline          { 1.0vx      }
   # varyingtabin         { 8          }
   # varyingtabout        { 3f         }

   # symbolfont           {            }
   # symbolstrings        { Slope      }
   # symbolidentifiers    { Slope      }
   # symbolcomments       { Base       }
   # symbolkeywords       { Bold       }
   # symbolnumbers        { Base       }
   # symboloperators      { Base       }
   # symbolsize           { 1.0f       }
   # symbolline           { 1.0vx      }
   # symboltabin          { 8          }
   # symboltabout         { 3f         }
}
```

These show the default font families, font faces, font sizes, line spacings, and tab settings in force for the three styles, and also that the default style is fixed. Notice that the font family name for fixed style is Courier, but for the other styles is empty. This causes the fixed style to always switch to Courier, and the other styles to use the same font family as in the surrounding document.

To change a default value, delete the preceding # and change the part between braces. For example, suppose you are happy with fixed except that you want bold keywords. Then one line

needs to be changed, to

```
fixedkeywords { Bold }
```

Or suppose you like varying as it stands, but would like it to be the default style rather than fixed. Again, only one line needs to be changed, to style { varying }.

11.4. Lout inside C comments

It is possible to embed Lout text inside C and C++ comments, by starting off the comment with an @ character. The entire comment after the @ character should be Lout text. For example, to force Lout to start a new page at some point within a C program, place

```
/*@ @NP */
```

at that point. Or you could make a heading like this:

```
/*@ @Display @Heading { treeprint() } */
```

Other possible uses for this feature include index entries and margin notes. Incredible as it may seem, you can even write

```
/*@ @CD @Heading { Function @CP { treeprint() } } */
```

with a @CP symbol and some C code inside the Lout code inside the C code. You probably can't go further, however, since that would require a C comment inside a C comment.

11.5. Tab characters

Tab characters provide a convenient way to indent and align parts of C programs. With care, this alignment can be preserved in the final print even with varying-width fonts.

The distance between two tab stops in the input file is by default taken to be 8 characters, which is standard for Unix. This can be changed with the tabin option. For example,

```
@CP tabin { 4 }
```

informs Lout that tab stops occur every 4 characters in the input file.

The distance between two tab stops in the output file (on the printed page) is quite a different thing, and it is determined by the value of the tabout option, which must be a Lout length. For example,

```
@CP tabout { 0.5i }
```

requests that tab stops be placed at half-inch intervals. In other words, a distance of one tab stop in the input will be equivalent to a distance of half an inch in the output. For example,

```
@CP style { varying } tabout { 3f }
```

might produce the following, where tab characters in the input file have been used for indenting

and also to align the comments:

```
struct tnode {              /* the basic node */
        char *word;         /* points to the text */
        int count;          /* number of occurrences */
        struct tnode *left; /* left child */
        struct tnode *right;/* right child */
};
```

The value 3f means three times the current font size, and it is the default value of tabout for the varying and symbol styles (Section 11.3). In a 12 point font this is 36 points, or half an inch.

If tabout is made too small, there is a danger that the alignment might fail. For example,

```
@CP style { varying } tabout { 0.2i }
```

produces

```
struct tnode { /* the basic node */
    char *word; /* points to the text */
    int count; /* number of occurrences */
    struct tnode *left; /* left child */
    struct tnode *right; /* right child */
};
```

given the same C text as the previous example. The problem here is that we are asking for /* to appear four tab stops or 0.8 inches from the left edge, and yet the material to its left on the line is wider than this. This causes /* to be shifted further to the right than expected, and the alignment is lost. The only solution is to increase tabout.

In stand-alone mode there are -t and -T options equivalent to tabin and tabout respectively. For example, -T0.5i produces a half-inch tab width.

11.6. Eiffel program printing

There is an @Eiffel symbol for typesetting Eiffel programs in conjuction with a filter called eif2lout. Apart from the change of language, everything is identical to C printing. The file and symbol names are different, of course:

cprint	eiffel
c2lout	eif2lout
@CP	@Eiffel
@CPSetup	@EiffelSetup

but everything works in an exactly analogous way: you place

```
@SysInclude { eiffel }
```

at the top of your document, enclose Eiffel program texts in @Eiffel { ... }, embed Lout into Eiffel using comments beginning with --@, and so on. The default style has been changed to varying,

so as to conform to the style guidelines in the standard Eiffel reference [8]. Some care has gone into making this conformance strict; in particular, if you enclose identifiers within comments in ‘ and ’, as the style guidelines say you should, they will come out in italics; in fact, arbitrary text between ‘ and ’ within comments will be set as Eiffel code.

The files needed for Eiffel printing are distributed separately from Basser Lout. You can get them from the author’s ftp directory (see the preface of this guide).

Chapter 12. Pascal and Modula-2 Programs

There is a @Pas symbol for printing Pascal programs [1]. No attempt is made to follow any particular printing standard; the design simply reflects this author's taste. To use @Pas, place @SysInclude { pas } at the start of your document in the usual way. A Pascal program or program fragment is entered like this:

```
@ID @Pas {
procedure PriDelete(x: PriEntry; var Q: PriorityQueue);
   var i: integer;
begin
   with Q^ do begin
      size := size - 1;
      if x^.back <= size then
      begin
         i := x^.back;
         A[i] := A[size + 1];
         A[i]^.back := i;
         PriAddRoot(i, Q);
         PriAddLeaf(i, Q)
      end
   end
end;
}
```

This produces

```
procedure PriDelete(x: PriEntry; var Q: PriorityQueue);
   var i: integer;
begin
   with Q↑ do begin
      size := size – 1;
      if x↑.back ≤ size then
      begin
         i := x↑.back;
         A[i] := A[size + 1];
         A[i]↑.back := i;
         PriAddRoot(i, Q);
         PriAddLeaf(i, Q)
      end
   end
end;
```

Blank lines, line breaks, indents and spaces in the input are respected, with a tab being considered equal to eight spaces. @Pas can also be used within a paragraph to produce a fragment like *A*[*i..j*]. Use @OneCol @Pas { ... } to prevent the result from breaking over two lines.

@Pas does not attempt to rearrange the program in any way. Each item is simply printed according to the following plan:

and	**and**	0	0
array	**array**	1	1
begin	**begin**	2	2
case	**case**	3	3
const	**const**	4	4
div	**div**	5	5
do	**do**	6	6
downto	**downto**	7	7
else	**else**	8	8
end	**end**	9	9
file	**file**	.	.
for	**for**	,	,
forward	**forward**	:	:
function	**function**	;	;
goto	**goto**	'	’
if	**if**	‘	‘
in	**in**	+	+
label	**label**	-	–
mod	**mod**	*	*
nil	**nil**	/	⁄
not	**not**	(	(
of	**of**	)	)
or	**or**	[	[
otherwise	**otherwise**	]	]
packed	**packed**	^	↑
procedure	**procedure**	..	..
program	**program**	=	=
record	**record**	<	<
repeat	**repeat**	>	>
set	**set**	<>	≠
then	**then**	<=	≤
to	**to**	>=	≥
type	**type**	:=	:=
until	**until**		
var	**var**		
while	**while**		
with	**with**		

Anything not mentioned here will appear in italic font.

Unlike the @CP symbol from the previous chapter, the @Pas symbol is a quick-and-dirty production which does not offer you any options, or indeed attempt to solve every problem of

Pascal formatting. In particular, Pascal strings need attention before formatting by @Pas. Their interiors are best enclosed in double quotes to prevent the above transformations from occurring inside them. Any \ or " characters inside strings will need to be replaced by \\ and \" respectively, and the opening quote should be replaced by ‘.

Similar remarks apply to Pascal comments; don’t forget that { and } must be enclosed in double quotes. Alternatively, a @Com symbol can be placed in front of a comment enclosed in braces. It will add literal braces:

```
@Com { A Pascal comment }
```

has result

{ *A Pascal comment* }

It may still be necessary to enclose the interior in double quotes.

There is a @Modula symbol which allows you to format Modula-2 programs in the same way as @Pas does for Pascal. You get it via @SysInclude { modula }, and once again it is a quick-and-dirty production.

Appendix A. Lout Quick Reference Guide

1. Running Lout

```
lout filename > postscript.ps
```

2. Ordinary documents (simple form)

```
@SysInclude { doc }
@Doc @Text @Begin
...
@End @Text
```

3. Ordinary documents (full form)

```
@SysInclude { doc }
@Document
   @InitialFont { Times Base 12p }
   @InitialBreak { adjust 1.2fx hyphen }
   @InitialLanguage { English }
   @PageHeaders { Simple }
   @FirstPageNumber { 1 }
   @ColumnNumber { 1 }
   @PageOrientation { Portrait }
//
@Text @Begin
...
@BeginSections
@Section ... @End @Section
@EndSections
@End @Text
```

4. Technical reports

```
@SysInclude { report }
@Report
   @Title { ... }
   @Author { ... }
   @Institution { ... }
   @DateLine { No }
   @CoverSheet { Yes }
   @InitialFont { Times Base 12p }
   @InitialBreak { adjust 1.2fx hyphen }
   @InitialLanguage { English }
   @PageHeaders { Simple }
   @FirstPageNumber { 1 }
   @ColumnNumber { 1 }
//
@Abstract ... @End @Abstract
@Section ... @End @Section
@Appendix ... @End @Appendix
```

5. Large-scale structure symbols

```
@Section
   @Title { ... }
   @RunningTitle { ... }
   @Tag { ... }
@Begin
@PP
...
@End @Section
```

@Section / @SubSection / @SubSubSection
@Appendix / @SubAppendix / @SubSubAppendix
@BeginSubSections … @EndSubSections if inner.

6. Cross references

@Tag { foo }	@PageOf foo
@PageMark foo	@NumberOf foo

7. Font changes

@B { bold font }	@I { italic font }
@BI { bold-italic font }	@R { Roman font }
@S { small-caps font}	@F { fixed-width font }
	@II { italic bold or Roman }

{ family face size } @Font { ... }

Times Helvetica Courier ...
Base Slope Bold BoldSlope ...
10p 12p +2p -2p 2.0f ...

8. Paragraph breaking styles

{ breakstyle linesep hyphen } @Break { ... }

adjust ragged lines clines ...
1.2fx 2vx 0.9vx ...
hyphen nohyphen

9. New paragraph and new page

@PP	Plain paragraph
@LP	Left paragraph
@LLP	New line
@DP	Display paragraph
@NP	New page
@CNP	Conditional new page

10. Displays and headings

```
@CD @Heading { A centred heading }
@ID { An indented display }
```

@D	@Display
@LD	@LeftDisplay
@ID	@IndentedDisplay
@QD	@QuotedDisplay
@CD	@CentredDisplay
	@CenteredDisplay
	@RightDisplay

11. Lists

```
@List
@ListItem { A list item }
@ListItem { Another list item }
@EndList
```

@L	@List
@LL	@LeftList
@IL	@IndentedList
@QL	@QuotedList
@CL	@CentredList
	@CenteredList
@NL	@NumberedList
@RL	@RomanList
@UCRL	@UCRomanList
@AL	@AlphaList
@UCAL	@UCAlphaList
@PNL	@ParenNumberedList
@PRL	@ParenRomanList
@PUCRL	@ParenUCRomanList
@PAL	@ParenAlphaList
@PUCAL	@ParenUCAlphaList
@BL	@BulletList
@SL	@StarList
@DL	@DashList

```
@TaggedList
@TagItem { label } { A list item }
@TagItem { label } { Another list item }
@EndList
```

@TL	@TaggedList
@WTL	@WideTaggedList
@VWTL	@VeryWideTaggedList

12. Footnotes, endnotes, margin notes

@FootNote { ... }	@EndNote { ... }
@LeftNote { ... }	@RightNote { ... }
@OuterNote { ... }	@InnerNote { ... }

13. Floating figures and tables

```
@Figure                 @Table
   @Caption { ... }        @Caption { ... }
   @Tag { ... }            @Tag { ... }
@Begin                  @Begin
...                     ...
@End @Figure            @End @Table
```

14. Tables

```
@SysInclude { tbl }
@SysInclude { doc }
...
@Tbl
   aformat { @Cell A | @Cell B }
   marginvertical { 0.5vx }
{
@Rowa
   A { ... }
   B { ... }
@Rowa
   ...
}
```

15. Equations

```
@SysInclude { eq }
@SysInclude { doc }
...
@Eq { sum from i=0 to n { r sup i over sqrt pi } }
```

16. Basic graphics

```
grey @Colour { ... }
gray @Color { ... }
@Box { ... }
@CurveBox { ... }
@ShadowBox { ... }
60d @Rotate { ... }
0.71 @Scale { ... }
@QuotedDisplay @Scale { ... }
@IncludeGraphic filename.eps
```

17. Miscellaneous

```
@Underline { will be underlined }
@Date
@Time
German @Language { ... }
# comment to end of line
"#&/@^{}|~"   (enclose these characters in quotes)
```

Appendix B. Bypass Symbols

The 'bypass' symbols described in this appendix are intended to be used only in Lout which is generated by computer programs. Their purpose is to bypass the Lout cross reference database, and so reduce the number of passes needed to finalise a document. These symbols should not be used by people, because that would only lead back to the consistency problems that prompted the introduction of cross references in the first place.

To produce a bypass table of contents, set the @MakeContents setup file option to Bypass and use @BypassContentsEntry symbols at the outermost level just before the introduction or first chapter:

```
@BypassContentsEntry
   indent { 0f }          the indent, e.g. 0f, 2f, 4f ...
   number {}              the section (etc.) number e.g. 5.2
   title {}               the section (etc.) title e.g. Azaleas
   pagenum {}             the page number e.g. @PageOf azaleas
```

For major entries such as chapters, use @BypassMajorContentsEntry with the same options. This increases the vertical spacing and uses bold font. When @MakeContents is Bypass, no contents entries will be produced automatically.

To bypass Lout's automatic numbering of large-scale structure symbols, use the @BypassNumber option:

```
@Section
   @Title { Azaleas }
   @Tag { azaleas }
   @BypassNumber { 5.2 }
...
```

Give the full 'path number' (5.2, B.3 or whatever) of the symbol. There is a @BypassNumber option for every symbol that has a @Title option and is usually assigned a number automatically by Lout, plus @Figure and @Table. No changes to the setup file are required in order to use @BypassNumber, and it is permitted for some large-scale structure symbols to have this option and others not.

To produce a bypass reference list, set the @MakeReferences setup file option to Bypass and place reference entries at the end of the document, after the last chapter or other large-scale structure symbol but before any bypass index entries (see below), like this:

```
@BypassReference
   label { [Kin94a] }
   value { @RefPrint kingston1995lout.expert }
```

The two options are objects which become the label and value of the reference entry. The value option can be any object, including an explicit reference; but @RefPrint does not introduce any cross-referencing delay if the @Reference symbols lie in a separate database file. No sorting or removal of duplicate entries will be done by Lout. When @MakeReferences is Bypass, @Cite and related symbols are ignored.

There is also @BypassChapReference with the same options for producing bypass chapter reference lists; these symbols should be placed at the outer level immediately after the preface, introduction, chapter or appendix that they refer to.

To produce bypass indexes, set the @MakeIndex setup file option to Bypass and use the @BypassRawIndex symbol repeatedly at the very end of the document, enclosed in @BypassBeginIndex and @BypassEndIndex symbols:

```
@BypassBeginIndex
@BypassRawIndex  indent { 0f }  { Azaleas, @PageOf azaleas }
...
@BypassEndIndex
```

The indent option gives the indent (0f, 1f, 2f, etc.), and the right parameter is as for @RawIndex. No @PageMark operations, sorting, merging, or attachment of page numbers will be done by Lout. When @MakeIndex is Bypass, @Index and related symbols are ignored. At present, bypass index symbols work only in books, not with ordinary documents or technical reports. There are corresponding symbols for creating bypass indexes A and B.

References

[1] K. Jensen and N. Wirth. *Pascal User Manual and Report*. Springer-Verlag, 1975.

[2] Brian W. Kernighan and Lorinda L. Cherry. A system for typesetting mathematics. *Communications of the ACM* **18**, 182–193 (1975).

[3] Jeffrey H. Kingston. The design and implementation of the Lout document formatting language. *Software—Practice and Experience* **23**, 1001–1041 (1993).

[4] Jeffrey H. Kingston. A Practical Introduction to the Lout Document Formatting System. Overhead transparencies (1994), Basser Department of Computer Science, University of Sydney.

[5] Jeffrey H. Kingston. *An Expert's Guide to the Lout Document Formatting System (Version 3)*. Basser Department of Computer Science, University of Sydney, 1995.

[6] Donald E. Knuth. *The TEXBook*. Addison-Wesley, 1984.

[7] Leslie Lamport. *LATEX User's Guide and Reference Manual*. Addison-Wesley, 1986.

[8] Bertrand Meyer. *Eiffel: The Language*. Prentice-Hall, 1992.

[9] Brian K. Reid. A High-Level Approach to Computer Document Production. In *Proceedings of the 7th Symposium on the Principles of Programming Languages (POPL), Las Vegas NV*, pages 24–31, 1980.

[10] William Strunk and E. B. White. *The Elements of Style*. Macmillan. Third Edition 1979.

[11] Mary-Claire van Leunen. *A Handbook for Scholars*. Oxford. Revised Edition, 1992.

Index

// symbol, 55
@DropCapThree, 25
@DropCapTwo, 25
VMerror PostScript error, 174
@Abstract, 62
accented characters, 9
@AL, 29
alabel option in @Diag, 163
aligned columns in tables, 120
aligned displays, 135
aligned equations, 135
@AlignedDisplay, 135
@AlphaList, 29
@AmberLight symbol, 121
@And, 106
angleto symbol in @Diag, 180
@AnotherFootNote, 34
@Appendix
  in books, 67
  in ordinary documents, 57
  in technical reports, 63
arrows, 159
Article reference type, 99
atangle symbol in @Diag, 180
axes in graphs, 195
axis of equation, 132

@B, 12
Base font, 13
@BasicSetup, 81
@BeginAlignedDisplays, 136
@BeginAppendices
  in books, 68
  in ordinary documents, 57
  in reports, 63
@BeginChapters, 67
@BeginOverheads, 73
@BeginSections
  in books, 67
  in ordinary documents, 57
  in reports, 62
@BeginSubAppendices
  in books, 68
  in ordinary documents, 58
  in reports, 63
@BeginSubSections
  in books, 67
  in ordinary documents, 57
  in reports, 62
@BeginSubSubAppendices
  in books, 68
  in ordinary documents, 58
  in reports, 63
@BeginSubSubSections
  in books, 67
  in ordinary documents, 57
  in reports, 63
Bezier curve, 176
@BI, 12
binary operators in equations, 134
@BL, 29
blabel option in @Diag, 163
Bold font, 13
BoldSlope font, 13
@Book, 65
Book reference type, 98
books, 65
@BookSetup, 69
@BoundaryMarks, 87
@Box, 146
@Box in @Diag, 153
braces, effect of, 7
@Break, 16
bsf file, 81
@Bullet, 8
@BulletList, 29

C++, 216
c2lout filter, 216
captions
  in @Figure and @Table, 38
  in graphs, 198

??

@CD, 27
@CDot, 8
cell options in tables, 109
@Center, 90
@CenteredDisplay, 27
@CenteredList, 28
centimetres, 5
@Centre, 90
centred entries in tables, 113
@CentredDisplay, 27
@CentredList, 28
@ChapCite, 95
@ChapRef, 95
@ChapRefListTitle, 103
@Chapter, 67
@Char symbol, 8
characters, 7
Cherry, Lorinda L., ii
@Cite, 94
citing references, 94
@CL, 28
clabel option in @Diag, 163
@Claim, 37
clines paragraph breaking style, 17
@CNP, 15
@Color, 145
@Colour, 145
column width
  on pages, 51
@ColumnGap, 51
@ColumnNumber, 51
columns, 51
comments, 79
contents, tables of, 45
@ContentsGoesHere, 58
@ContentsSeparate, 61
@ContentsGap, 46
@ContentsGapAbove, 46
@ContentsGapBelow, 46
@ContentsLeader, 46
@ContentsLeaderGap, 46
@ContentsRightWidth, 46
@CopyRight, 8
@Corollary, 37
@CoverSheet, 61
@CP, 216
@CPSetup, 219
cragged paragraph breaking style, 17
cross references, 44
curriculum vitae, 95
@CurveBox, 147
@CurveBox in @Diag, 153
cut marks, 87

@D, 27
@Dagger, 8
@DaggerDbl, 8
@DashJoin, 91
dashed lines, 154
@DashList, 29
@Data, 202
@Database, 93
database declarations, where to put, 83
database file, 93
database index file, 94
dataformat option in graphs, 206
@Date, 21
  in languages other than English, 22
@DefaultIndent, 28
@Definition, 37
definitions, 52
@Degree, 8
@Diag, 151
@Diamond, 153
dictfull PostScript error, 175
directories, Lout files and, 45
@Display, 27
@DisplayGap, 28
@DisplayIndent, 28
displayed equations, 135
displays, 27
@Divide, 8
@DL, 29
dlabel option in @Diag, 163
@DLI, 29
@Doc, 55
doc file, 80
docf file, 81
@Document, 55
document types, 55
@DotJoin, 91
@DotSep, 91

dotted lines, 154
double spacing, 19
@DP, 15
drop items, 29
@DropListItem, 29
@DropTagItem, 29
dsf file, 81
@DTI, 29

@E, 127
@EL, 28
Eliot, George, 1
@Ellipse, 153
elliptical arcs, 176
em (unit of measurement), 5
empty object, 11
encapsulated PostScript file, 76
@EndList, 28
@EndAlignedDisplays, 136
@EndAppendices
  in books, 68
  in ordinary documents, 57
  in reports, 63
@EndChapters, 67
@EndNote, 33
@EndOverheads, 73
@EndProof, 37
@EndSections
  in books, 67
  in ordinary documents, 57
  in reports, 62
@EndSubAppendices
  in books, 68
  in ordinary documents, 58
  in reports, 63
@EndSubSections
  in books, 67
  in ordinary documents, 57
  in reports, 62
@EndSubSubAppendices
  in books, 68
  in ordinary documents, 58
  in reports, 63
@EndSubSubSections
  in books, 67
  in ordinary documents, 57
  in reports, 63
EPS file, 76
@Eq, 127
eq file, 127
eqn equation formatter, ii
equations, 127
error messages, 3
@EvenLeftMargin, 85
@EvenRightMargin, 85
@Example, 37
expand cell width in tables, 112
extend keyword, 178

f unit of measurement, 5
face name of font, 12
family name of font, 12
@Fig, 151
@Figure, 37
@FigureCaptionPos, 40
@FigureFormat, 40
@FigureLocation, 39
@FigureNumbers, 40
figures, 37
@FirstPageNumber, 88
@Florin, 8
font, 11
font size, 14
@Font, 13
fontdefs file, 81
@FootMargin, 85
@FootAboveGap, 34
@FootGap, 34
@FootLen, 34
@FootNote, 32
@FootNoteBreak, 34
@FootNoteFont, 34
@FootNoteLocation, 34
@FootNoteNumbers, 34
@FootNoteThrough, 34
form-feed in plain text, 77
from in equations, 129
full name of equation symbol, 134
@FullWidth, 56
@FullWidthRule, 147

GNU Public License, ii

@Graph, 194
@GraphCircle, 210
@GraphCross, 210
@GraphDashed, 210
@GraphDiamond, 210
@GraphDotted, 210
graph file, 194
@GraphFilledCircle, 210
@GraphFilledDiamond, 210
@GraphFilledSquare, 210
@GraphFilledTriangle, 210
@GraphNoLine, 210
@GraphPlus, 210
@GraphSolid, 210
@GraphSquare, 210
@GraphTriangle, 210
graphs (statistical), 194

Harvey, W. J., 1
@Heading, 14
@HeadingFont, 15
histograms, 203
@HTree symbol in @Diag, 174
Hungarian and @NumSep, 91
hyphenation, 20
  in languages other than English, 22

@I, 12
@ID, 27
@If, 105
@II, 12
@IL, 28
@Illustration, 75
illustrations, 75
import, 52
InBook reference type, 100
inches, 5
@Include, 78
@IncludeGraphic, 150
including an illustration, 150
@IndentedDisplay, 27
@IndentedList, 28
index file, 94
@IndexBlanks, 47
@IndexBreak, 50
@IndexColumnGap, 51
@IndexColumnNumber, 51
indexes, 46
@IndexFont, 50
@InitialBreak, 20
@InitialFont, 14
@InitialLanguage, 23
@InitialSpace option, 26
InProceedings reference type, 100
@IntroFirstPageNumber, 88
@IntroPageNumbers, 88
intro and non-intro pages, 89
@Introduction, 67
ISO-LATIN-1 character set, 8
@Isosceles, 153

keeping things on one line, 17
Kernighan, Brian W., ii
kerning, 14
key in graph, 210
Knuth, D. E., ii

@L, 28
label options in @Diag, 163
labelled references, 96
labels in graphs, 200
langdefs file, 81
@Language, 22
languages other than English, 22
large-scale structure, 41
last.page tag, 44
LaTeX, 93
@LD, 27
.ld file, 93
@Lecture, 73
@LeftDisplay, 27
@LeftList, 28
@LeftNote, 34
@Lemma, 37
length, 5
@LI, 28
.li file, 94
ligatures, 14
  and hyphenation, 20
line adjustment, 16
line spacing, 19

lines paragraph breaking style, 17
@Link symbol from @Diag, 158
@List, 28
@ListItem, 28
list symbol options, 31
lists, 28
  in languages other than English, 22
@LL, 28
@LLP, 15
@LocalWidthRule, 147
@Location, 38
logarithmic axes in graphs, 197
lout.li file, 45
lout spacing, 26
@Lozenge, 8
@LP, 15

@MajorNum, 91
@MajorTitle, 91
@MakeContents, 45
@MakeIndex, 50
@MakeReferences, 101
margin notes, 34
margins
margins
  in pages, 85
  margins in tables, 111
MastersThesis reference type, 99
mathematical functions in graphs, 207
mathematics, 127
matrix in equations, 130
@MinorNum, 91
@MinorTitle, 91
@Minute, 8
Misc reference type, 99
multi-page tables, 119
multiple columns, 51
multiple runs, why needed, 45
@Multiply, 8
mydefs file, 52
mydoc file, 80
mystyle.ld file, 104

negation of equation symbols, 140
new page, 15
@NL, 28
@NoChapCite, 95
@NoChapRef, 95
@NoCite, 95
@NoRef, 95
@Node, 153
@NoDotJoin, 91
@NoDotSep, 91
non in equations, 134
@Not, 106
@NP, 15
@NP (new page) in tables, 119
@Null, 90
@NumSep, 91
numbered displays, 135
numbered equations, 135
@NumberedDisplay, 135
@NumberedList, 28
@NumberOf, 44
@NumberSeparator, 43

object, 3
@OddLeftMargin, 85
odd and even pages, 89
@OddRightMargin, 85
on in equations, 129
option, 5
@Or, 106
oragged paragraph breaking style, 17
ordinary documents, 55
@OrdinarySetup, 58
organizing large documents, 78
orphan lines, 19
outdented paragraphs, 17
@OuterNote, 35
over in equations, 129
@Overhead, 72
@OverheadSetup, 74
@OverheadTransparencies, 71
overhead transparencies, 71
@OverStrike, 197

page, skipping to next, 15
@PageBackground, 86
@PageBoxType, 85
page footer, 88
page header, 88

@PageHeaders, 88
@PageHeight, 84
@PageNum, 90
@PageNumbers, 88
@PageOrientation, 84
@PageType, 83
@PageWidth, 84
@PageMark, 44
@PageOf, 44
pairs option in graphs, 202
@PAL, 29
@ParaGap, 16
paragraph breaking, 16
paragraph symbols, 15
@ParaIndent, 16
@ParenAlphaList, 29
@ParenNumberedList, 29
@ParenRomanList, 29
@ParenUCAlphaList, 29
@ParenUCRomanList, 29
@ParSym, 8
@PartNumber, 68
@PartText, 68
@PartTitle, 68
parts of books, 68
@Pas, 224
Pascal programs, 224
PDF documents, 78
PhDThesis reference type, 99
@Place, 35
plain text documents, 76
plain text tables, 122
@PNL, 29
point (unit of measurement), 5
points option in graphs, 202
@Polygon, 154
@PP, 15
@Preface, 66
prev symbol in @Diag, 180
preventing line breaks, 17
@PRL, 29
Proceedings reference type, 99
@Proof, 37
@Proposition, 37
@PUCAL, 29
@PUCRL, 29
punctuation in equations, 134

@QD, 27
@QL, 28
quote characters, 8
@QuotedDisplay, 27
@QuotedList, 28

@R, 12
ragged paragraph breaking style, 17
raw displays, 136
@RawEndList, 30
@RawList, 30
raw lists, 30
@Ref, 95
@RefPrint, 95
@RefStyle, 104
@RefCiteLabels, 101
@RefCiteStyle, 101
@Reference, 93
reference printing style, 104
references, 93
@ReferencesBeforeAppendices, 69
@RefListBreak, 103
@RefListFont, 103
@RefListFormat, 102
@RefListGap, 103
@RefListIndent, 103
@RefListLabels, 102
@RefListLabelWidth, 103
@RefListRightIndent, 103
@RefListSortKey, 103
@RefListTitle, 102
@RefNumbers, 102
refs.ld file, 93
refstyle.ld file, 104
@Register, 8
Reid, Brian K., ii
relation symbols in equations, 134
@Report, 59
@ReportSetup, 64
reports, 59
resumes, 95
@Right, 90
right justified entries in tables, 113
@RightDisplay, 27

@RightNote, 35
@RL, 29
rlines paragraph breaking style, 17
Roman numerals, 29
@RomanList, 29
@Rotate, 148
rotated entries in tables, 109
row formats in tables, 110
rragged paragraph breaking style, 17
rules, 147
running header, 88
@RunningTitle, 42

@S, 12
s unit of measurement, 5
@Scale, 149
Scribe
  influence on Lout, ii
  reference formatting, 93
@Second, 8
@Section
  in books, 67
  in ordinary documents, 57
  in reports, 62
@SectionGap, 15
@SectSym, 8
@SeparateIntroNumbering, 69
@SetColour, 145
setup file, 80
setup files for tables, 123
@ShadowBox, 147
@ShadowBox in @Diag, 153
short name of equation symbol, 134
@SL, 29
slides *see* overhead transparencies
Slope font, 13
small capitals, 12
sorting of reference lists, 103
spaces, significance of, 6
spanning columns and rows in tables, 116
@Square, 153
stand-alone illustrations, 75
standard.ld file, 106
@Star, 8
@StarList, 29
start and non-start pages, 89
@Sterling, 8
@StructPageNums, 92
style option of @Graph, 195
sub in equations, 128
@SubAppendix
  in books, 68
  in ordinary documents, 58
  in reports, 63
@SubSection
  in books, 67
  in ordinary documents, 57
  in reports, 62
@SubSubAppendix
  in books, 68
  in ordinary documents, 58
  in reports, 63
@SubSubSection
  in books, 67
  in ordinary documents, 57
  in reports, 63
sup in equations, 129
supp in equations, 129
@Sym symbol, 10
Symbol font, 10
symbols, makeup of, 5
symbolsize option in graphs, 202
@SysDatabase, 104
@SysInclude, 80
system database directory, 104
system include directory, 80

tab characters in C programs, 221
@Table, 38
@TableCaptionPos, 40
@TableFormat, 40
@TableLocation, 39
@TableNumbers, 40
tables, 107
tables of contents, 45
tag, 44
@Tag, 44
@TaggedList, 29
@TagItem, 29
@Tbl, 107
tbl file, 107
technical reports, 59

TechReport reference type, 99
TEX, ii
  hyphenation, 20
  mathematical fonts, 144
  page optimization, 57
  paragraph breaking, 16
tex (LATEX) spacing, 26
@Theorem, 36
@TI, 29
ticks in graphs, 200
@Time, 21
  in languages other than English, 22
@Title, 41
@TitlePageFont, 69
@TL, 29
to in equations, 129
@TopMargin, 85
@TradeMark, 8
@Tree symbol in @Diag, 170
troff spacing, 26
@True, 106
@Type option, 93

@UCAL, 29
@UCAlphaList, 29
@UCRL, 29
@UCRomanList, 29
unbreakablefirst, 19
unbreakablelast, 19
@Underline, 21
units of measurement, 5
@Unpaginated, 77
@Use, 81

v unit of measurement, 5
van Leunen, Mary-Claire, 93
@Verbatim, 24
vertical alignment of tables, 121
@VeryWideTaggedList, 29
@VShift, 150
@VWTL, 29

@Wide
  with illustrations, 76
  with @Rotate, 148
  with @Scale, 149
@WideTaggedList, 29
widow lines, 19
@WTL, 29

xcoord symbol in @Diag, 181
xticks option to @Graph, 200

ycoord symbol in @Diag, 181
@Yen, 8
yticks option to @Graph, 201